



RF TEST REPORT

Report No: FCS202406188W01

Issued for

Applicant::	ShenZhen Diode Optoelectric technology co., LTD
Address:	907, Longhua Haicheng Business Building, Shenzhen
Product Name:	HEATING INSOLES
Brand Name:	N/A
Model Name:	SP-XJ19
Series Model:	SP-XJ14,SP-XJ15,SP-XJ05,SP-XJ16,SP-XJ17 SP-XJ18,SP-XJ20,SP-XJ21,SP-XJ22
Test Standard:	ETSI EN 300 328 V2.2.2 (2019-07)



TEST REPORT CERTIFICATION

Applicant's name..... : ShenZhen Diode Optoelectric technology co., LTD

Address..... : 907, Longhua Haicheng Business Building, Shenzhen

Manufacture's Name..... : Dongguan City fifty-five degrees intelligent technology LTD

Address..... : Jiangrui High Salary Science Park, Liangping West Road, Liaobu Town, Dongguan City, Guangdong Province

Product description

Product Name..... : HEATING INSOLES

Brand Name : N/A

Model Name:..... : SP-XJ19

Series Model..... : SP-XJ14,SP-XJ15,SP-XJ05,SP-XJ16,SP-XJ17
SP-XJ18,SP-XJ20,SP-XJ21,SP-XJ22

Test Standards..... : ETSI EN 300 328 V2.2.2 (2019-07)

This device described above has been tested by FCS, and the test results show that the equipment under test (EUT) is in compliance with the 2014/53/EU RED Directive Art.3.2 requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of FCS, this document only be altered or revised by FCS, personal only, and shall be noted in the revision of the document.

Date of Test..... :

Date (s) of performance of tests..... : Jun 26, 2024 ~July 1, 2024

Date of Issue..... : July 10, 2024

Test Result..... : **Pass**

Tested by

:

(Scott Shen)

Reviewed by

:

(Scott Shen)

Approved by

:

(Jack Wang)





Tabl of Contents	Page
1. SUMMARY OF TEST RESULTS	6
1.1 Testing laboratory	7
1.2 MEASUREMENT UNCERTAINTY	7
2. GENERAL INFORMATION	8
2.1 GENERAL DESCRIPTION OF EUT	8
2.2 ENVIRONMENTAL CONDITIONS FOR TESTING	13
2.3 TEST MODEL	13
2.4 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS	14
2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS	15
3. EFFECTIVE RADIATED POWER	16
3.1 LIMIT	16
3.2 TEST PROCEDURES	16
3.3 TEST SETUP	17
3.4 TEST RESULTS	17
4. PEAK POWER DENSITY	18
4.1 LIMIT	18
4.2 TEST PROCEDURES	18
4.3 TEST SETUP	19
4.4 TEST RESULTS	19
5. OCCUPIED CHANNEL BANDWIDTH	21
5.1 LIMIT	21
5.2 TEST PROCEDURES	21
5.3 TEST SETUP	21
5.4 TEST RESULTS	22
6.4 TEST RESULTS	24
7. ADAPTIVE (CHANNEL ACCESS MECHANISM)	25
7.1 LIMIT	25
7.2 TEST PROCEDURES	25
7.3 TEST SETUP	26
7.4 TEST RESULTS	26



- 8. SPURIOUS EMISSIONS – TRANSMITTER 27**
 - 8.1 LIMIT 27
 - 8.2 TEST PROCEDURES 27
 - 8.3 TEST SETUP 28
 - 8.4 EUT OPERATION DURING TEST 29
 - 8.5 TEST RESULT 30
- 9. SPURIOUS EMISSIONS – RECEIVER 32**
 - 9.1 LIMIT 32
 - 9.2 TEST PROCEDURES 32
 - 9.3 TEST SETUP 33
 - 9.4 EUT OPERATION DURING TEST 33
 - 9.5 TEST RESULT 34
- 10. RECEIVER BLOCKING 36**
 - 10.1 LIMIT 36
 - 10.2 TEST PROCEDURES 37
 - 10.3 TEST SETUP 38
 - 10.4 TEST RESULTS 38



Rev.	Issue Date	Report No.	Effect Page	Contents
00	July 10, 2024	FCS202406188W01	N/A	Initial Issue



1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

ETSI EN 300 328 V2.2.2			
Test Item	Limit	Frequency Range (MHz)	Applicable (Yes/No)
TRANSMITTER PARAMETERS			
RF output power	Clause 4.3.2.2.3	2400-2483.5	Y
Power Spectral Density	Clause 4.3.2.3.3		Y
Duty Cycle, Tx-sequence, Tx-gap	Clause 4.3.2.4.3		N
Medium Utilisation	Clause 4.3.2.5.3		N
Adaptivity (adaptive equipment using modulations other than FHSS)	Clause 4.3.2.6		N
Occupied Channel Bandwidth	Clause 4.3.2.7.3		Y
Transmitter unwanted emissions in the OOB domain	Clause 4.3.2.8.3	FL=2400-2BW FH=2483.5+2BW	Y
Transmitter unwanted emissions in the spurious domain(Conducted)	Clause 4.3.2.9.3	30-12750	N
Transmitter unwanted emissions in the spurious domain(Radiated)			Y
RECEIVER PARAMETERS			
Spurious emissions (Conducted)	Clause 4.3.2.10.3	30-12750	N
Spurious emissions (Radiated)			Y
Receiver Blocking	Clause 4.3.2.11.3	2400-2483.5	Y
Geo-location capability	Clause 4.3.2.12.3	--	N



1.1 Testing laboratory

Company Name:	Dongguan Funas Testing Technology Co., Ltd.
Address:	Room 105, 1/F.. Baohao Technology Building 1, No.15, Gongye West Road.Songshan Lake Hi-Tech Industrial Area, Dongguan, Guangdong, China
Telephone:	+86-769-27280901
Fax:	+86-769-27280901
Laboray Accreditations	
FCC Test Firm Registration Number: 514908 CNAS Number: L15566 Designation number: CN0127 A2LA accreditation number: 5545.01 ISED Number: 25801	

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95** %.

No.	Item	Uncertainty
1	RF power,conducted	± 0.71 dB
2	Spurious emissions,conducted	± 0.63 dB
3	Spurious emissions,radiated(>1G)	± 2.25 dB
4	Spurious emissions,radiated(<1G)	± 2.21 dB



2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Product Name	HEATING INSOLES														
Brand Name	N/A														
Model Name	SP-XJ19														
Series Model	SP-XJ14,SP-XJ15,SP-XJ05,SP-XJ16,SP-XJ17 SP-XJ18,SP-XJ20,SP-XJ21,SP-XJ22														
Model Difference	Refer to the user manual														
Product Description	<p>The EUT is a HEATING INSOLES</p> <table border="1"><tr><td>Operation Frequency:</td><td>2402-2480 MHz</td></tr><tr><td>Modulation Type:</td><td>GFSK</td></tr><tr><td>Radio Technology:</td><td>BLE</td></tr><tr><td>Bluetooth Configuration:</td><td>LE</td></tr><tr><td>Number Of Channel:</td><td>40 CH</td></tr><tr><td>Antenna Gain (dBi)</td><td>1.81</td></tr><tr><td>Transmitter rate:</td><td>1MHz</td></tr></table> <p>Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification, please refer to the User's Manual.</p>	Operation Frequency:	2402-2480 MHz	Modulation Type:	GFSK	Radio Technology:	BLE	Bluetooth Configuration:	LE	Number Of Channel:	40 CH	Antenna Gain (dBi)	1.81	Transmitter rate:	1MHz
Operation Frequency:	2402-2480 MHz														
Modulation Type:	GFSK														
Radio Technology:	BLE														
Bluetooth Configuration:	LE														
Number Of Channel:	40 CH														
Antenna Gain (dBi)	1.81														
Transmitter rate:	1MHz														
Channel List	Refer to below														
Power Supply	Input:5V \pm 1A														
Battery	DC 3.7V														
Hardware version number	V1.0														
Software version number	V1.0														

Note:

1.For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

2.

Channel List for BLE							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
37	2402	09	2422	18	2442	28	2462
00	2404	10	2424	19	2444	29	2464
01	2406	38	2426	20	2446	30	2466
02	2408	11	2428	21	2448	31	2468
03	2410	12	2430	22	2450	32	2470
04	2412	13	2432	23	2452	33	2472
05	2414	14	2434	24	2454	34	2474
06	2416	15	2436	25	2456	35	2476
07	2418	16	2438	26	2458	36	2478
08	2420	17	2440	27	2460	39	2480

a) The type of modulation used by the equipment:

- FHSS
- other forms of modulation

b) In case of FHSS modulation:

- In case of non-Adaptive Frequency Hopping equipment:
The number of Hopping Frequencies:
- In case of Adaptive Frequency Hopping Equipment:
The maximum number of Frequencies: 40
The minimum number of Frequencies: 40
The (average) Dwell Time:

c) Adaptive / non-adaptive equipment:

- non-adaptive Equipment
- adaptive Equipment without the possibility to switch to a non-adaptive mode
- adaptive Equipment which can also operate in a non-adaptive mode

d) In case of adaptive equipment:

- The Channel Occupancy Time implemented by the equipment:
- The equipment has implemented an LBT based DAA mechanism
 - In case of equipment using modulation different from FHSS:
- The equipment is Frame Based equipment
- The equipment is Load Based equipment
- The equipment can switch dynamically between Frame Based and Load Based equipment
The CCA time implemented by the equipment: μ s
The value q as referred to in clause 4.3.2.5.2.2.2
- The equipment has implemented an non-LBT based DAA mechanism
- The equipment can operate in more than one adaptive mode

e) In case of non-adaptive Equipment:

- The maximum RF Output Power (e.i.r.p.): dBm
- The maximum (corresponding) Duty Cycle:.....%
- Equipment with dynamic behaviour, that behaviour is described here. (e.g. the different combinations of duty cycle and corresponding power levels to be declared):

f) The worst case operational mode for each of the following tests:



- RF Output Power
 - GFSK
 - Power Spectral Density
 - GFSK
 - Occupied Channel Bandwidth
 - GFSK
 - Transmitter unwanted emissions in the OOB domain
 - GFSK
 - Transmitter unwanted emissions in the spurious domain
 - GFSK
 - Receiver spurious emissions
 - GFSK
 - Receiver Blocking
 - GFSK
- g) The different transmit operating modes (tick all that apply):
- Operating mode 1: Single Antenna Equipment
 - Equipment with only 1 antenna
 - Equipment with 2 diversity antennas but only 1 antenna active at any moment in time
 - Smart Antenna Systems with 2 or more antennas, but operating in a (legacy) mode where only 1 antenna is used. (Ble mode in smart antenna systems)
 - Operating mode 2: Smart Antenna Systems - Multiple Antennas without beam forming
 - Single spatial stream / Standard throughput / (Ble mode)
 - High Throughput (> 1 spatial stream) using Occupied Channel Bandwidth 1
 - High Throughput (> 1 spatial stream) using Occupied Channel Bandwidth 2
 - NOTE: Add more lines if more channel bandwidths are supported.
 - Operating mode 3: Smart Antenna Systems - Multiple Antennas with beam forming
 - Single spatial stream / Standard throughput (Ble mode)
 - High Throughput (> 1 spatial stream) using Occupied Channel Bandwidth 1
 - High Throughput (> 1 spatial stream) using Occupied Channel Bandwidth 2
 - NOTE: Add more lines if more channel bandwidths are supported.
- h) In case of Smart Antenna Systems:
- The number of Receive chains:
 - The number of Transmit chains:
 - symmetrical power distribution
 - asymmetrical power distribution
- In case of beam forming, the maximum beam forming gain:
- NOTE: Beam forming gain does not include the basic gain of a single antenna.
- i) Operating Frequency Range(s) of the equipment:
- Operating Frequency Range 1: 2402 MHz to 2480 MHz
 - Operating Frequency Range 2:
 - NOTE: Add more lines if more Frequency Ranges are supported.
- j) Occupied Channel Bandwidth(s):
- Occupied Channel Bandwidth : 1.0 MHz
 - Occupied Channel Bandwidth : 2.0 MHz
 - NOTE: Add more lines if more channel bandwidths are supported.
- k) Type of Equipment (stand-alone, combined, plug-in radio device, etc.):



- Stand-alone
- Combined Equipment (Equipment where the radio part is fully integrated within another type of equipment)
- Plug-in radio device (Equipment intended for a variety of host systems)
- Other

l) The extreme operating conditions that apply to the equipment:

Operating temperature range: -10° C to 55° C
 Operating voltage range: DC 3.7V(Normal: DC 3.7V)

- Details provided are for the:
 - stand-alone equipment
 - combined (or host) equipment
 - test jig

m) The intended combination(s) of the radio equipment power settings and one or more antenna assemblies and their corresponding e.i.r.p levels:

- Antenna Type
 - PCB antenna
 - Antenna Gain: 1.81 dBi
 - If applicable, additional beamforming gain (excluding basic antenna gain): dB
 - Temporary RF connector provided
 - No temporary RF connector provided
 - Dedicated Antennas (equipment with antenna connector)
 - Single power level with corresponding antenna(s)
 - Multiple power settings and corresponding antenna(s)
 - Number of different Power Levels:
 - Power Level 1: dBm
 - Power Level 2: dBm
 - Power Level 3: dBm

NOTE 1: Add more lines in case the equipment has more power levels.

NOTE 2: These power levels are conducted power levels (at antenna connector).

- For each of the Power Levels, provide the intended antenna assemblies, their, corresponding gains (G) and the resulting e.i.r.p. levels also taking into account the beamforming gain (Y) if applicable

Power Level 1: dBm

Number of antenna assemblies provided for this power level:

Assembly #	Gain (dBi)	e.i.r.p.(dBm)	Part number or model name
1	1.81	2.41	
2			
3			
4			

NOTE: Add more rows in case more antenna assemblies are supported for this power level.

Power Level 2: dBm

Number of antenna assemblies provided for this power level:



Assembly #	Gain (dBi)	e.i.r.p.(dBm)	Part number or model name
1	N/A	N/A	N/A
2			
3			
4			

NOTE: Add more rows in case more antenna assemblies are supported for this power level.

Power Level 3: dBm

Number of antenna assemblies provided for this power level:

Assembly #	Gain (dBi)	e.i.r.p.(dBm)	Part number or model name
1	N/A	N/A	N/A
2			
3			
4			

NOTE: Add more rows in case more antenna assemblies are supported for this power level.

n) The nominal voltages of the stand-alone radio equipment or the nominal voltages of the combined (host) equipment or test jig in case of plug-in devices:

Details provided are for the: stand-alone equipment

combined (or host) equipment

test jig Supply Voltage

AC mains State AC voltage

DC State DC voltage :5V

In case of DC, indicate the type of power source

Internal Power Supply

External Power Supply or AC/DC adapter

Battery: 3.7V

Other:

o) Describe the test modes available which can facilitate testing:

The EUT can entering Engineering Command by (nRFgo Studio -Direct Test Mode UART interface).

p) The equipment type (e.g. Bluetooth®, IEEE 802.11™ [i.3], proprietary, etc.):

Ble

q) If applicable, the statistical analysis referred to in clause 5.4.1 q) (to be provided as separate attachment)

r) If applicable, the statistical analysis referred to in clause 5.4.1 r) (to be provided as separate attachment)

s) Geo-location capability supported by the equipment:

- Yes
- The geographical location determined by the equipment as defined in clause 4.3.1.13.2 or clause 4.3.2.12.2 is not accessible to the user
- No

t) Describe the minimum performance criteria that apply to the equipment (see clause 4.3.1.12.3 or clause 4.3.2.11.3):

2.2 ENVIRONMENTAL CONDITIONS FOR TESTING

Test Condition	Temperature(°C)	Voltage(V)	Relative Humidity(%)
NT/NV	26	3.8	57
LT/NV	-10	3.8	/
HT/NV	55	3.8	/

Note:

- (1) The HT 55°C and LT -10°C was declared by manufacturer, The EUT couldn't be operate normally with higher or lower temperature.
- (2) NV: Normal Voltage; NT: Normal Temperature.
- (3) LT: Low Extreme Test Temperature; HT: High Extreme Test Temperature.
- (4) The measurements are performed at the highest, middle, lowest available channels.

2.3 TEST MODEL

E-1 EUT

The EUT was programmed to be in continuously transmitting mode.

Channel List for BLE		
Test Channel	EUT Channel	Test Frequency (MHz)
lowest	CH0	2402
middle	CH19	2440
highest	CH39	2480



2.4 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Necessary accessories

Item	Equipment	Mfr/Brand	Model/Type No.	Serial No.	Note

Support units

Item	Equipment	Mfr/Brand	Model/Type No.	Serial No.	Note

Note: The support equipment was authorized by Declaration of Confirmation.



2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last Calibration	Calibrated Until
Bilog Antenna	TESEQ	CBL6111D	34678	2024.08.29	2024.08.28
Horn Antenna	SCHWARZBECK	BBHA 9120D	9120D-1343	2024.08.29	2024.08.28
Pre-Amplifier(0.1M-3GHz)	EM	EM330	060665	2024.08.29	2024.08.28
Pre-Amplifier(1G-18GHz)	SKET	LNPA-01018G-45	SK2018080901	2024.08.29	2024.08.28
Wireless Communications Test Set	R&S	CMW 500	133884	2024.08.29	2024.08.28
Signal Analyzer	Agilent	N9020A	MY51110105	2024.08.29	2024.08.28
Temperature & Humidity turn table	HH660	Mieo	N/A	2024.08.29	2024.08.28
Antenna mast	EM	SC100_1	60531	N/A	N/A
AC Power Source	EM	SC100	N/A	N/A	N/A
AC Power Source	APC	KDF-11010G	F214050035	N.C.R	N.C.R

RF Connected Test equipment

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last Calibration	Calibrated Until
USB RF power sensor	DARE	RPR3006W	15I00041SNO03	2024.08.29	2024.08.28
MIMO Power measurement test Set	Keysight	U2021XA	MY55520005	2024.08.29	2024.08.28
			MY55520006	2024.08.29	2024.08.28
			MY56120038	2024.08.29	2024.08.28
			MY56280002	2024.08.29	2024.08.28
Signal Generator	Agilent	N5182A	MY46240556	2024.08.29	2024.08.28
Signal Analyzer	Agilent	N9020A	MY49100060	2024.08.29	2024.08.28
Universal Radio communication tester	R&S	CMU200	11764	2024.08.29	2024.08.28
Wireless Communications Test Set	R&S	CMW 500	133884	2024.08.29	2024.08.28
Temperature & Humidity test chamber	HH660	Mieo	N/A	2024.08.29	2024.08.28
programmable power supply	Safety test	GDS-250	171200018	2024.08.29	2024.08.28
Attenuator	Agilent	E3642A	MY40002025	2024.08.29	2024.08.28
AC Power Source	HP	8494B	DC-18G	2024.08.29	2024.08.28
Router	APC	KDF-11010G	F214050035	N.C.R	N.C.R
Router	WAVLINK	WL-WN575A2	WL1512260336	N.C.R	N.C.R



3. EFFECTIVE RADIATED POWER

3.1 LIMIT

FHSS:

The maximum RF output power for adaptive Frequency Hopping equipment shall be equal to or less than 20 dBm. The maximum RF output power for non-adaptive Frequency Hopping equipment shall be declared by the manufacturer. See clause 5.4.1 m). The maximum RF output power for this equipment shall be equal to or less than the value declared by the manufacturer. This declared value shall be equal to or less than 20 dBm.

Other than FHSS:

For adaptive equipment using wide band modulations other than FHSS, the maximum RF output power shall be 20 dBm. The maximum RF output power for non-adaptive equipment shall be declared by the supplier and shall not exceed 20 dBm. See clause 5.4.1 m). For non-adaptive equipment using wide band modulations other than FHSS, the maximum RF output power shall be equal to or less than the value declared by the supplier.

This limit shall apply for any combination of power level and intended antenna assembly.

Limit
20 dBm

Between the start and stop times of each individual burst calculate the RMS power over the burst using the formula below. Save these P_{burst} values, as well as the start and stop times for each burst.


$$P_{burst} = \frac{1}{k} \sum_{n=1}^k P_{sample}(n)$$

with 'k' being the total number of samples and 'n' the actual sample number

3.2 TEST PROCEDURES

1. Please refer to ETSI EN 300 328 (V2.2.2) clause 5.4.2.1 for the test conditions.
2. Please refer to ETSI EN 300 328 (V2.2.2) clause 5.4.2.2 for the measurement method.
 - Use a fast power sensor suitable for 2,4 GHz and capable of 1 MS/s and 2MS/s.
 - Use the following settings:
 - a) - Sample speed 1 MS/s or 2MS/s faster.
 - a) - The samples must represent the power of the signal.
 - Measurement duration: For non-adaptive equipment: equal to the observation period defined in b)
 - b) clause 4.3.1.3.2 or clause 4.3.2.4.2. For adaptive equipment, the measurement duration shall be long enough to ensure a minimum number of bursts (at least 10) is captured
 - c) Print the plots from power sensor by used power sensor on PC, select the max result and record it.

3.3 TEST SETUP

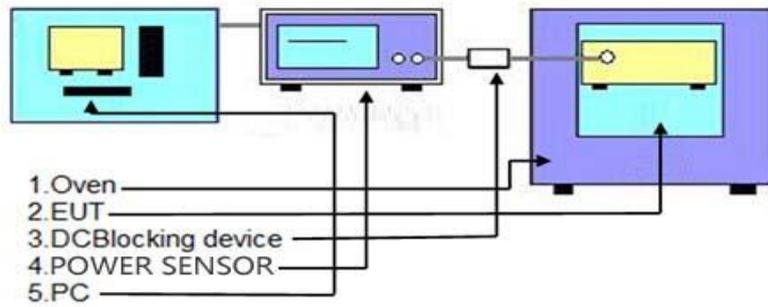


3.4 TEST RESULTS

GFSK 1M(Test)

Modulation	Test conditions (Temperature)	EIRP (dBm)		
		Low Channel	Middle Channel	High Channel
GFSK	Normal	2.41	2.12	2.10
	Lower	2.09	2.11	2.12
	Upper	2.05	1.87	1.93
Limit		≤100mW (20dBm)		

Remark: $P = A + G + Y, G=1\text{dBi}, x=100\%$

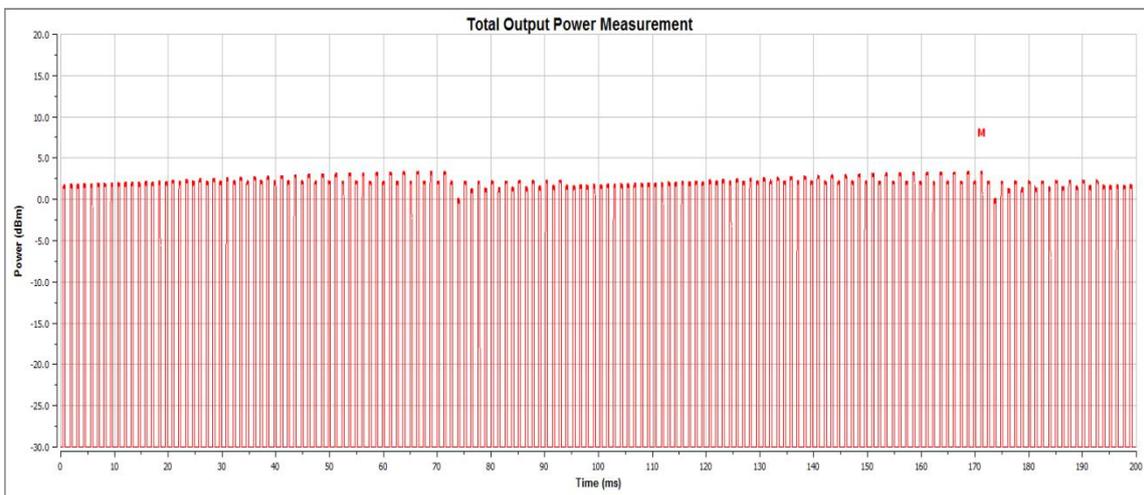

Remark: This Report only show the test plots of the worst case.



4. PEAK POWER DENSITY

4.1 LIMIT

For equipment using wide band modulations other than FHSS, the maximum Power Spectral Density is limited to 10 dBm per MHz

4.2 TEST PROCEDURES

The measurement shall be repeated for the equipment being configured to operate at the lowest, the middle, and the highest frequency of the stated frequency range.

1. Please refer to ETSI EN 300 328 (V2.2.2) clause 5.4.3.1 for the test conditions.
2. Please refer to ETSI EN 300 328 (V2.2.2) clause 5.4.3.2 for the measurement method.

a).the equipment setup.

Frequency range	2400MHz-2483.5MHz
RBW/VBW	10KHz/30KHz
Sweep points	>8350 / Auto (Set as 10000)
Sweep time	For non-continuous transmissions: $2 \times \text{Channel Occupancy Time} \times \text{number of sweep points}$
	For continuous transmissions: 10 s; the sweep time may be increased further until a value where the sweep time has no further impact anymore on the RMS value of the signal.
Detector	RMS
Trace	Max hold

b). For conducted measurements on smart antenna systems using either operating mode 2 or 3 (see clause 5.3.2.2), repeat the measurement for each of the transmit ports. For each frequency point, add up the amplitude (power) values for the different transmit chains and use this as the new data set.

c). Add up the values for amplitude (power) for all the samples in the file.

d).Normalize the individual values for amplitude so that the sum is equal to the RF Output Power (e.i.r.p.)


e). Starting from the first sample in the file (lowest frequency), add up the power of the following samples representing a 1 MHz segment and record the results for power and position (i.e. sample #1 to #100). This is the Power Spectral Density (e.i.r.p.) for the first 1 MHz segment which shall be recorded.

f).Shift the start point of the samples added up in step 5 by 1 sample and repeat the procedure in step e (i.e. sample #2 to #101).

g).Repeat step 6 until the end of the data set and record the radiated Power Spectral Density values for each of the 1 MHz segments.

h).From all the recorded results, the highest value is the maximum Power Spectral Density for the UUT.

4.3 TEST SETUP

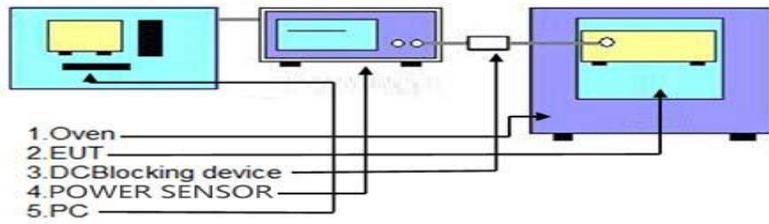


4.4 TEST RESULTS


GFSK 1M(Test)

Modulation	Test conditions	Maximum e.i.r.p. Spectral Density (dBm/MHz)		
		Low Channel	Middle Channel	High Channel
GFSK	Normal	1.94	2.14	2.28
Limit		≤10dBm/MHz		


Low Channe

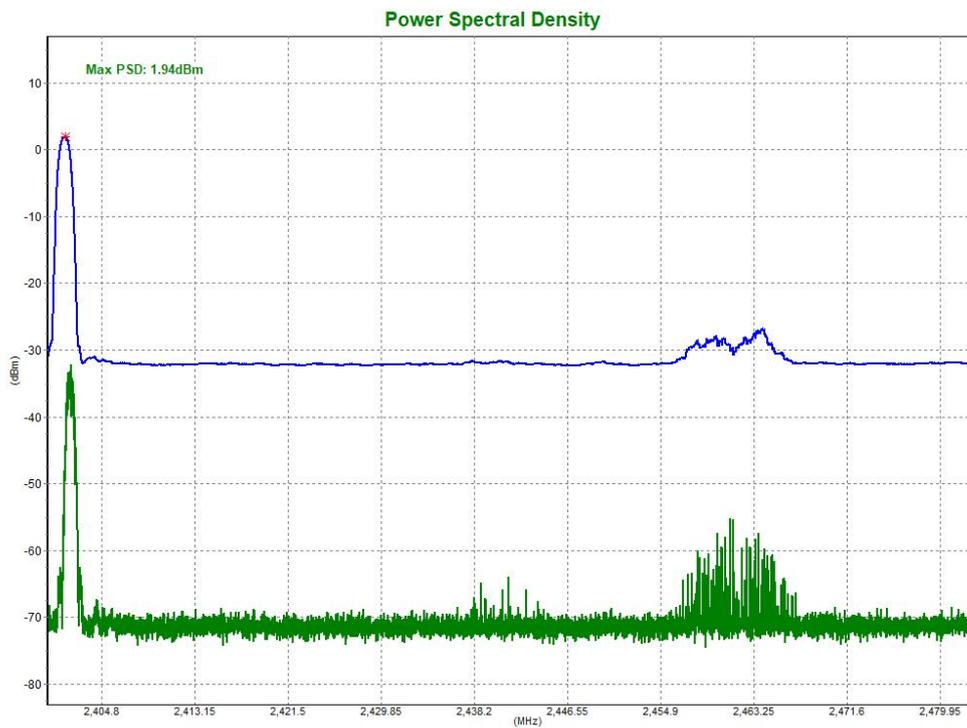

Middle Channel

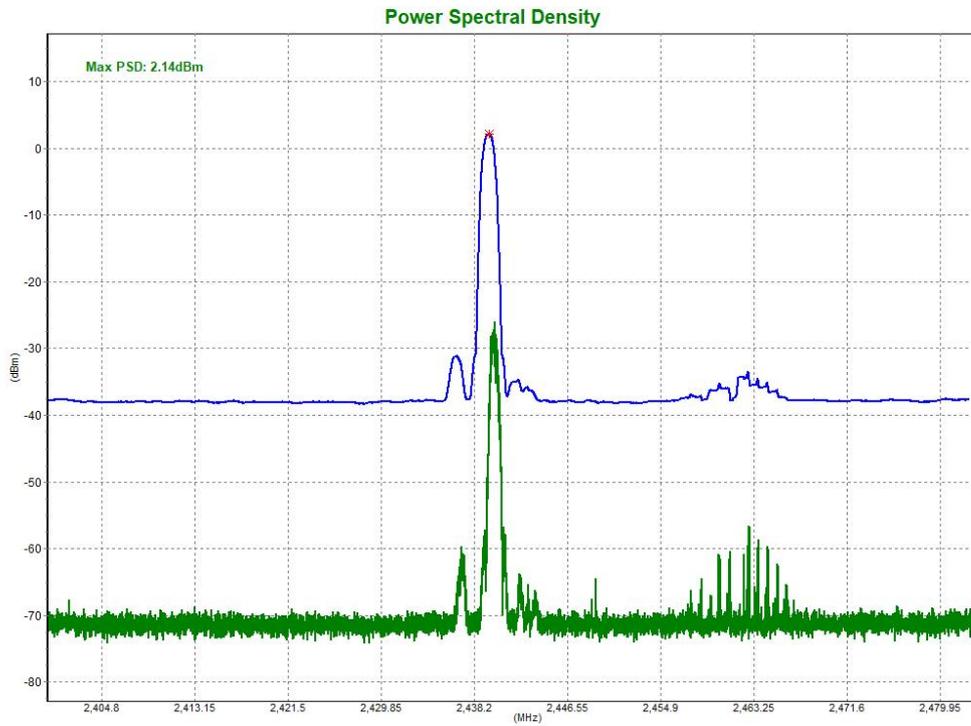

High Channel

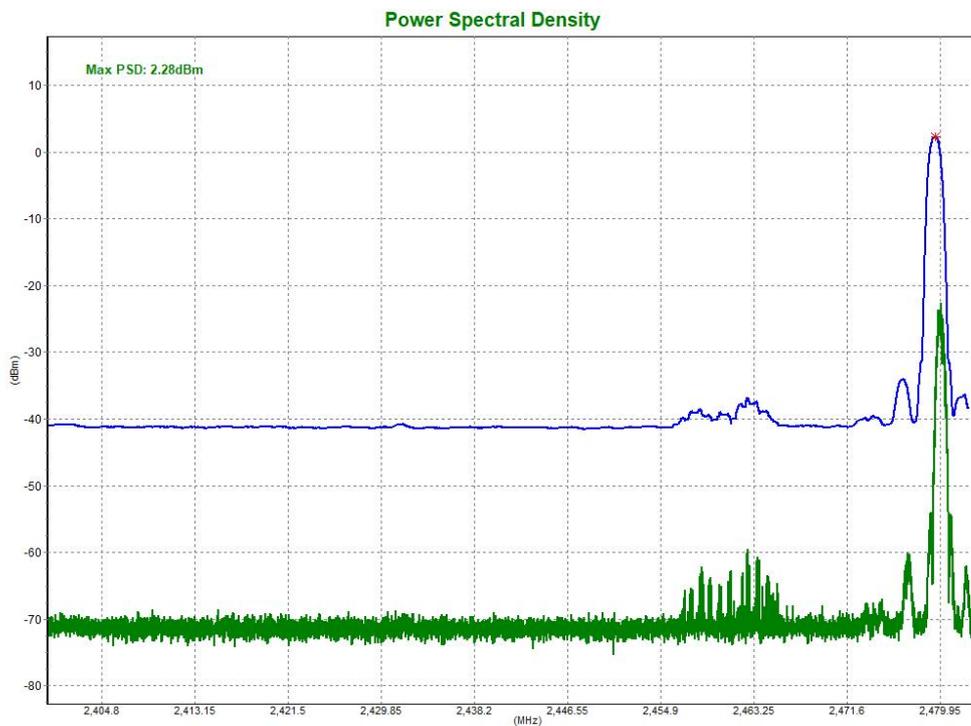

Note: Maximum spectral power density(EIRP) = power spectral density + the antenna gain value

5. OCCUPIED CHANNEL BANDWIDTH


5.1 LIMIT

The Occupied Channel Bandwidth shall fall completely within the band given in table 1. In addition, for non-adaptive equipment using wide band modulations other than FHSS and with e.i.r.p. greater than 10 dBm, the occupied channel bandwidth shall be less than 20 MHz.

5.2 TEST PROCEDURES

1. Please refer to ETSI EN 300 328 (V2.2.2)clause 5.4.7.1 for the test conditions.
 2. Please refer to ETSI EN 300 328 (V2.2.2) clause 5.4.7.2 for the measurement method.
- Centre Frequency: The centre frequency of the channel under test
 - Resolution BW: ~ 1 % of the span without going below 1 %
 - RBW: 30K
 - VBW: 100K
 - Frequency Span for frequency hopping equipment: Lowest frequency separation that is used within the hopping sequence)
 - Frequency Span for other types of equipment: 2 × Nominal Channel Bandwidth (e.g. 2 MHz for a 1 MHz channel)
 - Detector Mode: RMS
 - Trace Mode: Max Hold
 - Sweep time:1S

5.3 TEST SETUP

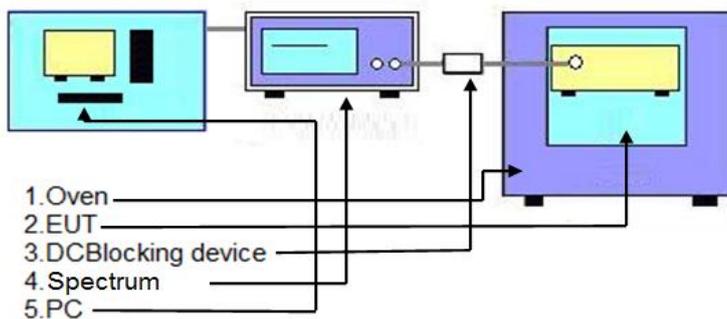




5.4 TEST RESULTS

GFSK 1M(Test)

CHANNEL	CHANNEL FREQUENCY (MHz)	OCCUPIED BANDWIDTH (MHz)	FL/FH(MHz)	Limit	PASS/FAIL
0	2402	1.022	2402.00	FL > 2400 MHz and FH < 2483.5 MHz	PASS
19	2440	1.020	2440.00		PASS
39	2480	1.019	2480.00		PASS


Note: FL is the lowest frequency of the 99% occupied bandwidth of power envelope.
FH is the highest frequency of the 99% occupied bandwidth of power envelope.

Channel 0

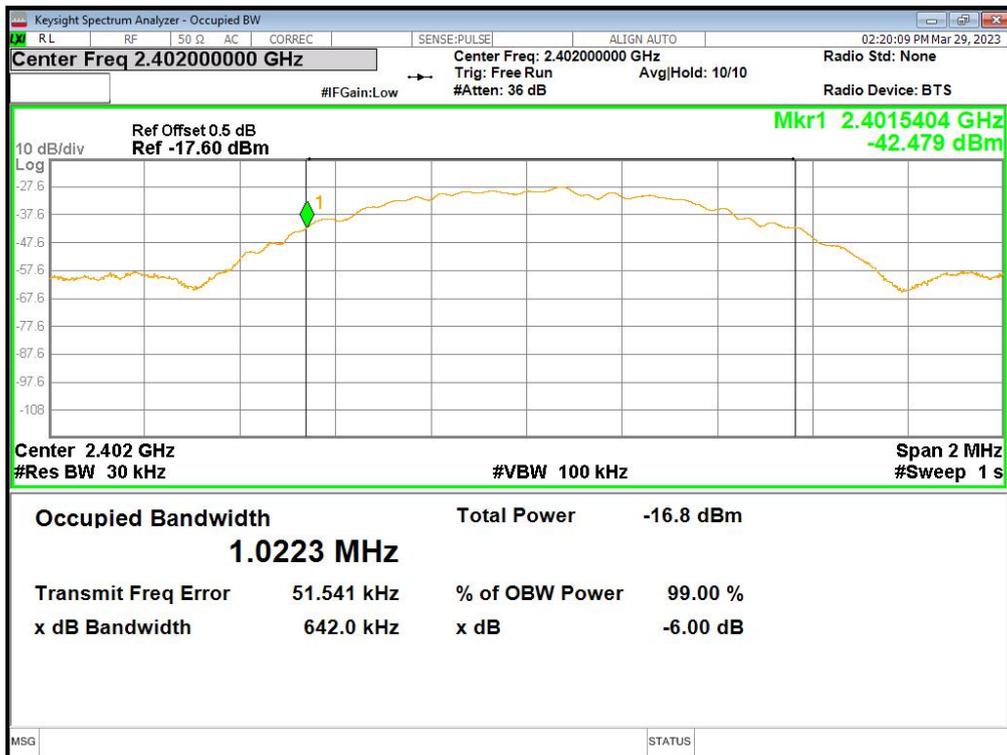




Channel 19

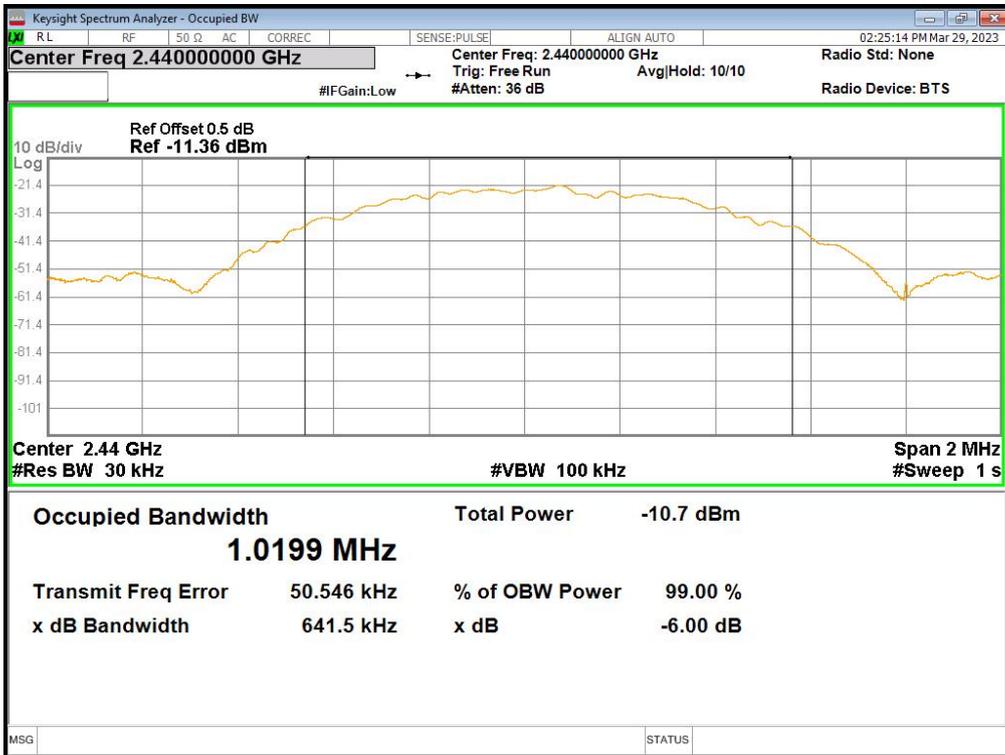

Channel 39

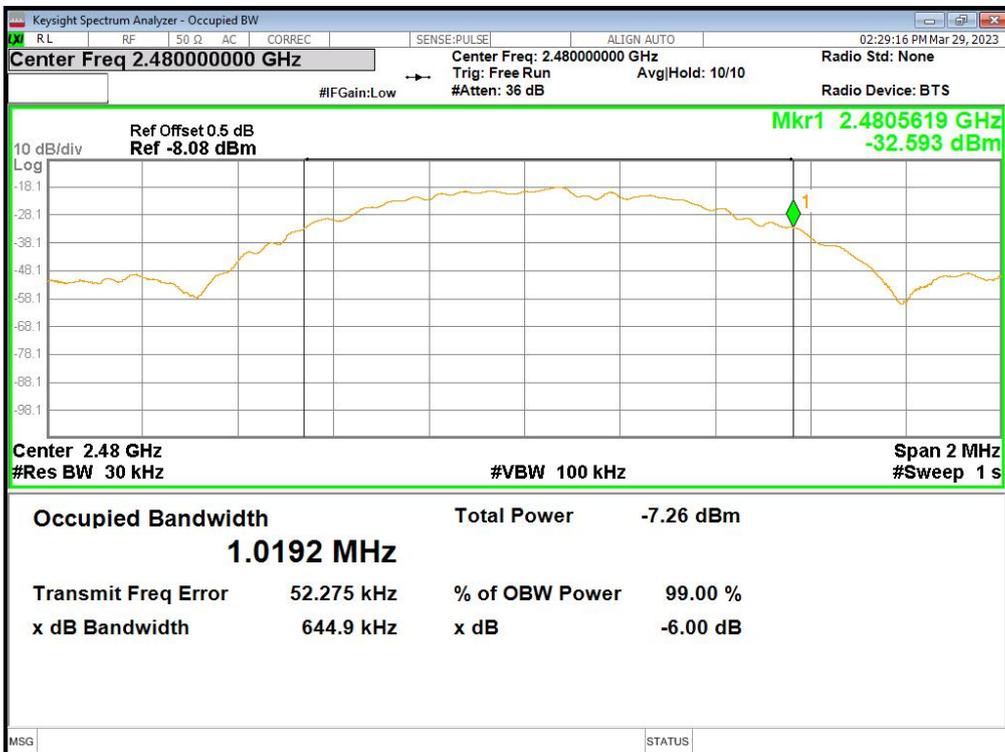



6.4 TEST RESULTS

Transmitter_unwanted_emissions_in_the_OOB_domain,Lowest									
Condition	Mode	CF(MHz)	M F(MHz)	Level (dBm/MHz)	Segment A Limit (dBm/MHz)	M F (MHz)	Level (dBm/MHz)	Segment B Limit(dBm/MHz)	Results
NVNT	1M,PHY	2402	2399.478	-47.28	-10	2398.455	-49.95	-20	Pass
NVNT	1M,PHY	2402	2399.500	-47.49	-10	2398.478	-49.70	-20	Pass
NVNT	1M,PHY	2402	2399.500	-79.04	-10	2397.518	-79.17	-20	Pass

Test Plot(Worst Mode)

BLE Low



BLE High



7. ADAPTIVE (CHANNEL ACCESS MECHANISM)

7.1 LIMIT

The frequency range of the equipment is determined by the lowest and highest

Non-LBT based Detect and Avoid:

1. The channel shall remain unavailable for a minimum time equal to 1 s after which the channel may be considered again as an 'available' channel.
2. COT \leq 40ms;
3. Idle Period = 5% of COT;
4. Detection threshold level = $-70 \text{ dBm/MHz} + (20 \text{ dBm} - \text{Pout e.i.r.p.})/1 \text{ MHz}$ (Pout in dBm).

LBT based Detect and Avoid:

1. CCA observation time declared by the supplier:
 - a. If the equipment shall perform a Clear Channel Assessment (CCA) check using energy detect. The equipment shall observe the operating channel for the duration of the CCA observation time which shall be not less than 18 μ s.
2. COT = 1~10 ms;
3. Idle Period = 5% of COT;
4. Detection threshold level = $-70 \text{ dBm/MHz} + (20 \text{ dBm} - \text{Pout e.i.r.p.})/1 \text{ MHz}$ (Pout in dBm).

LBT based Detect and Avoid (Load Based Equipment):

1. CCA declared by the manufacturer:
 - a. If the equipment shall perform a Clear Channel Assessment (CCA) check using energy detect. The equipment shall observe the operating channel for the duration of the CCA observation time which shall be not less than 18 μ s.
 - b. If the equipment finds the channel occupied, it shall not transmit on this channel, The equipment shall perform an Extended CCA check in which the channel is observed for a random duration in the range between 18 μ s and at least 160 μ s.
2. COT $\leq (13 / 32) * q \text{ ms}$; $q = [4 \sim 32]$; 1.625ms~13ms;
3. Detection threshold level = $-70 \text{ dBm/MHz} + (20 \text{ dBm} - \text{Pout e.i.r.p.})/1 \text{ MHz}$ (Pout in dBm).


Short Control Signalling Transmissions:

Short Control Signalling Transmissions shall have a maximum duty cycle TxOn / (TxOn + TxOff) ratio of 10 % within any observation period of 50 ms.

7.2 TEST PROCEDURES

1. Please refer to ETSI EN 300 328 (V2.2.2) clause 5.4.6.1 for the test conditions.
2. Please refer to ETSI EN 300 328 (V2.2.2) clause 5.4.6.2 for the measurement method.
3. The spectrum analyzer sweep was triggered by the start of the interfering signal, with the interfering signal present, a 100 % duty cycle CW signal is inserted as the blocking signal.
 - RBW: \geq Occupied Channel Bandwidth (if the analyzer does not support this setting, the highest available setting shall be used)
 - RBW: use next available RBW setting below the measured Occupied Channel Bandwidth
 - Filter type: Channel Filter
 - RBW:1M/VBW:3M
 - Detector Mode: RMS
 - Centre Frequency: Equal to the hopping frequency to be tested.
 - Span: 0 Hz
 - Sweep time: $>$ Channel Occupancy Time of the UUT. If the Channel Occupancy Time is non-contiguous (non-LBT based equipment), the sweep time shall be sufficient to cover the period over which the Channel Occupancy Time is spread out
 - Trace Mode: Clear/Write
 - Trigger Mode: Video

7.3 TEST SETUP

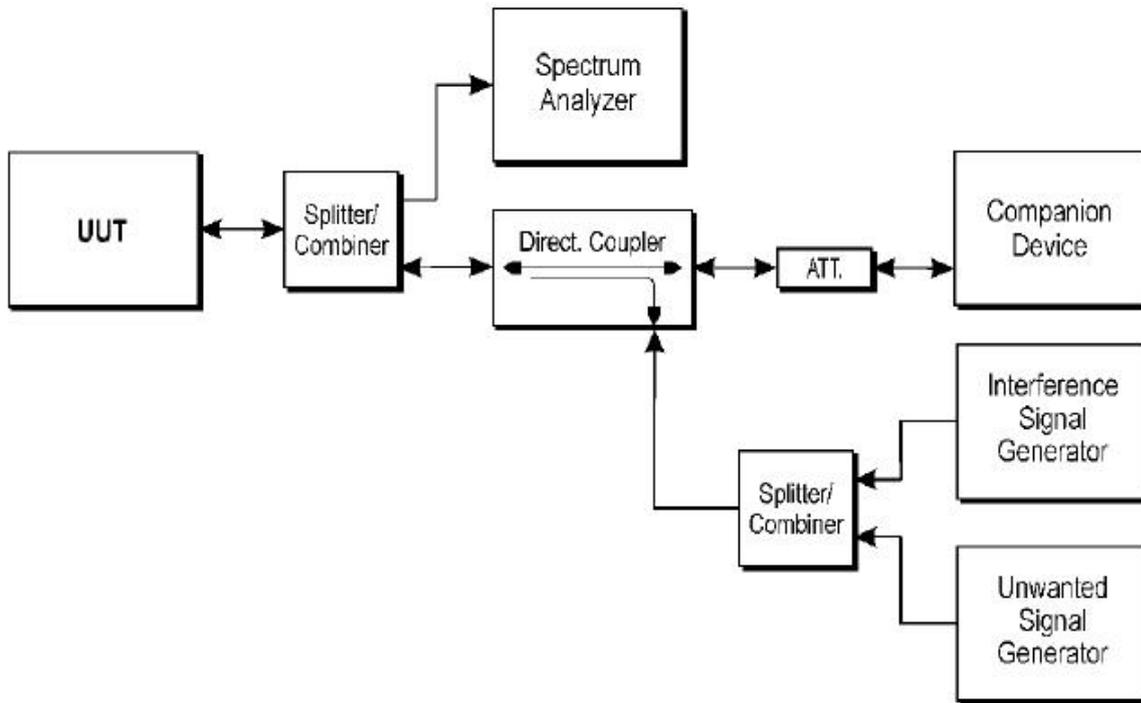

- a. ble is normal transmission
- b. interference shall be injected -> ble shall stop transmission.
- c. blocking shall be injected -> ble does not resume any normal transmission
- d. Removing the interference and blocking signal

7.4 TEST RESULTS

Mode	Stop time after interfering signal(s)	
	low	high
TX Mode	N/A	N/A

Short Control Signalling Transmissions

Mode	Maximum duty cycle(ms)		Limit(ms)
	Low	High	
TX mode	N/A	N/A	N/A

The EUT is not applicable



8. SPURIOUS EMISSIONS – TRANSMITTER

8.1 LIMIT

Frequency range	Maximum power, e.r.p(≤1 GHz) e.i.r.p(> 1 GHz)	Bandwidth
30 MHz to 47 MHz	-36 dBm	100 KHz
47 MHz to 74 MHz	-54 dBm	100 KHz
74 MHz to 87.5 MHz	-36 dBm	100 KHz
87.5 MHz to 118 MHz	-54 dBm	100 KHz
118 MHz to 174 MHz	-36 dBm	100 KHz
174 MHz to 230 MHz	-54 dBm	100 KHz
230 MHz to 470 MHz	-36 dBm	100 KHz
470 MHz to 862 MHz	-54 dBm	100 KHz
862 MHz to 1 GHz	-36 dBm	100 KHz
1 GHz to 12.75 GHz	-30 dBm	1 MHz

8.2 TEST PROCEDURES

- 1.Please refer to ETSI EN 300 328 (V2.2.2) clause 5.4.9.1 for the test conditions.
- 2.Please refer to ETSI EN 300 328 (V2.2.2) clause 5.4.9.2 for the measurement method.

The following table is the setting of the Spectrum Analyzer.


Spectrum Analyzer	Setting	
Frequency Start to Stop	30 MHz to 1000 MHz	1000 MHz to 12750MHz
Resolution bandwidth	100 kHz	1 MHz
Video bandwidth	300 kHz	3 MHz
Filter type	3 dB (Gaussian)	
Detector mode	Peak	
Trace Mode	Max Hold	
Sweep Points	≥ 19 400 (Set as 20000)	≥ 23 500 (Set as 24000)

Sweep Time	For non continuous transmissions (duty cycle less than 100 %), the sweep time shall be sufficiently long, Below 1GHz such that for each 100 kHz frequency step, Above 1GHz such that for each 1MHz frequency step the measurement time is greater than two transmissions of the UUT, on any channel
------------	---


- a. The EUT was placed on the top of the turntable in Semi Anechoic Room.
- b. The test shall be made in the transmitting mode. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- c. This measurement shall be repeated with the transmitter in standby mode where applicable.
- d. For 30~12750MHz spurious emissions measurement, the broad band bi-log receiving antenna was placed 3 meters far away from the turntable.
- e. The broadband receiving antenna was fixed on the same height with the EUT to find each suspected emissions of both horizontal and vertical polarization. Each recorded suspected value is indicated as Read Level (Raw).
- f. Replace the EUT by standard antenna and feed the RF port by signal generator.
- g. Adjust the frequency of the signal generator to the suspected emission and slightly rotate the turntable to locate the position with maximum reading.
- h. Adjust the power level of the signal generator to reach the same reading with Read Level (Raw).
- i. The level of the spurious emission is the power level of (8) plus the gain of the standard antenna in dBi and minus the loss of the cable used between the signal generator and the standard antenna.
- j. If the level calculated in (9) is higher than limit by more than 6dB, then lower the RBW of the spectrum analyzer to 30KHz. If the level of this emission does not change by more than 2dB, then it is taken as narrowband emission, otherwise, wideband emission.
- k. The measurement shall be repeated at the lowest and the highest channel of the stated frequency range.
- l. EUT Orthogonal Axis:
 "X" - denotes Laid on Table; "Y" - denotes Vertical Stand; "Z" - denotes Side Stand.

8.3 TEST SETUP

(A) Radiated Emission Test Set-Up, Frequency Below 1000MHz

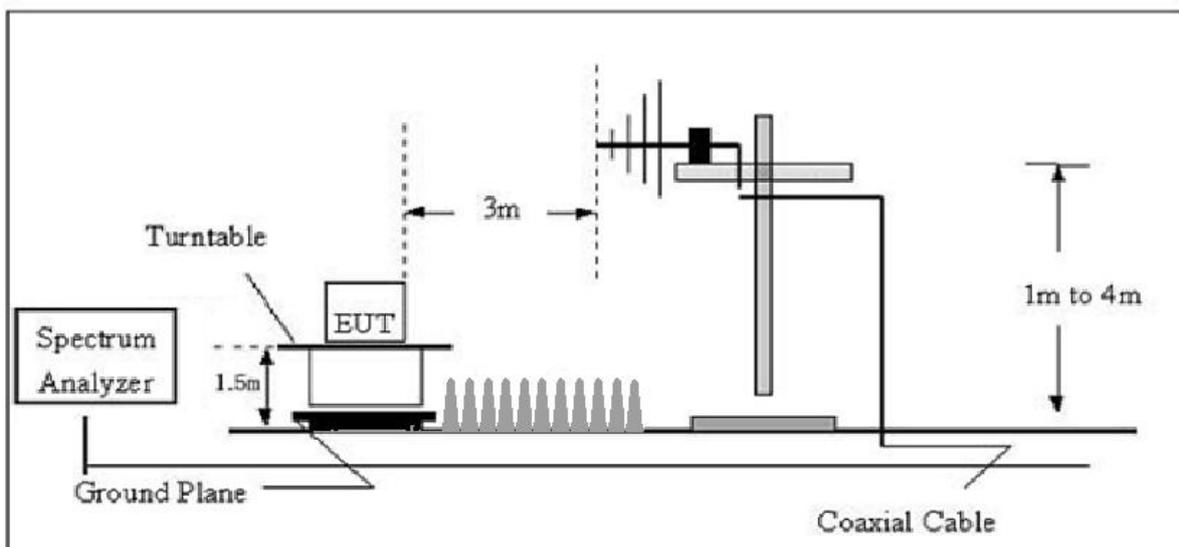

(B) Radiated Emission Test Set-Up Frequency Above 1 GHz

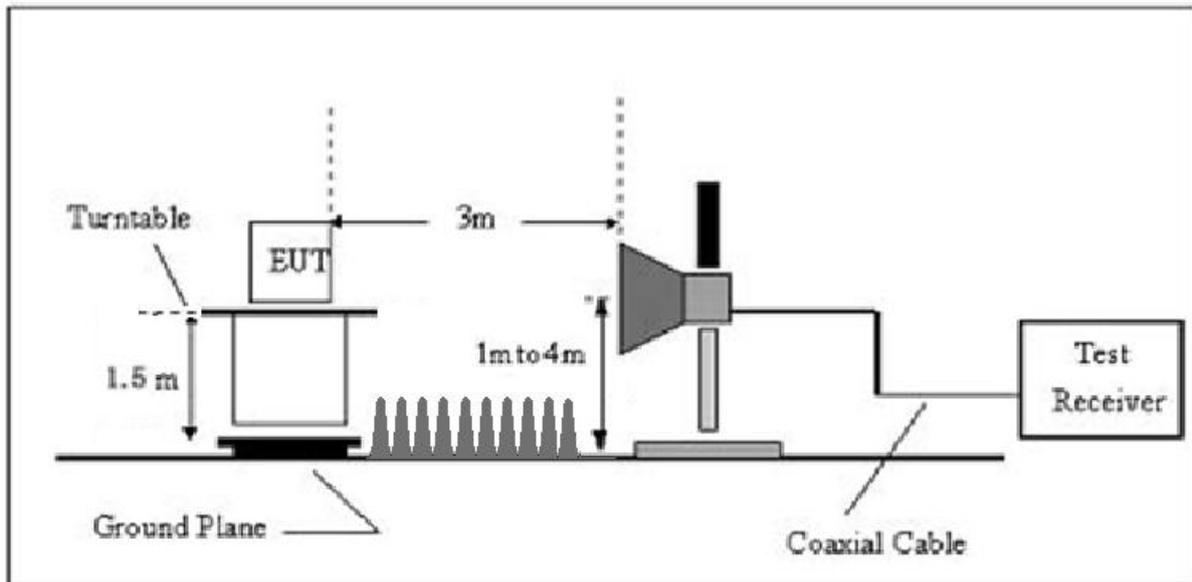

8.4 EUT OPERATION DURING TEST



1. The EUT was programmed to be in continuously transmitting mode.
2. For the initial investigation on the highest, lowest frequency, no significant differences in spurious emissions were observed between these 2 channels. The worst test data was shown
3. There is a filter used during the test, the fundamental signals will be not shown in the plot.
4. The EUT is connected with the GSM base station when the BT is transmitting.



8.5 TEST RESULT


Remark: The all data rate modes had been test, but only worse test data was recorded in the test report.

TX 2402MHz

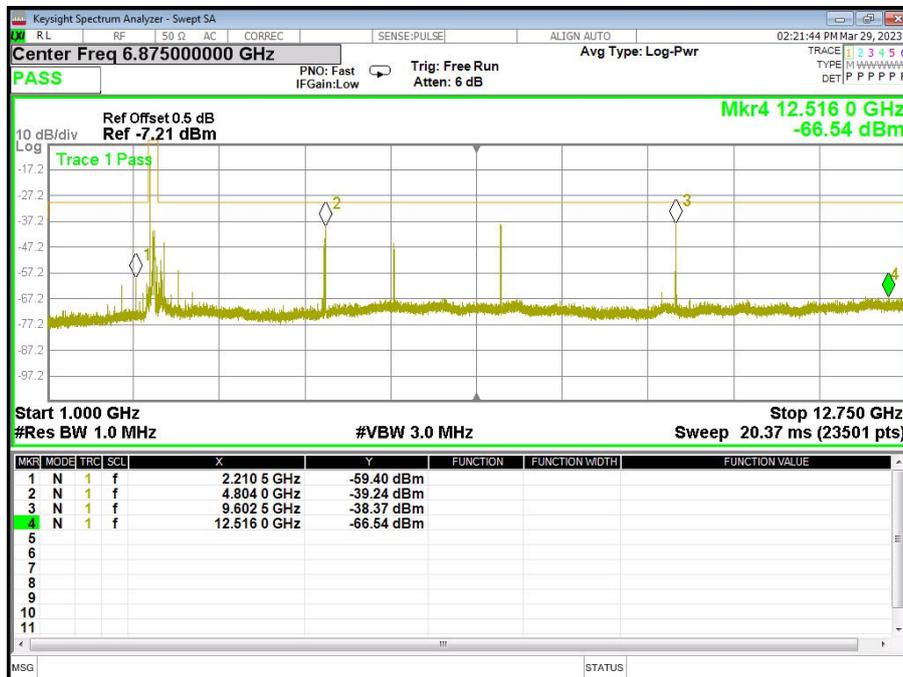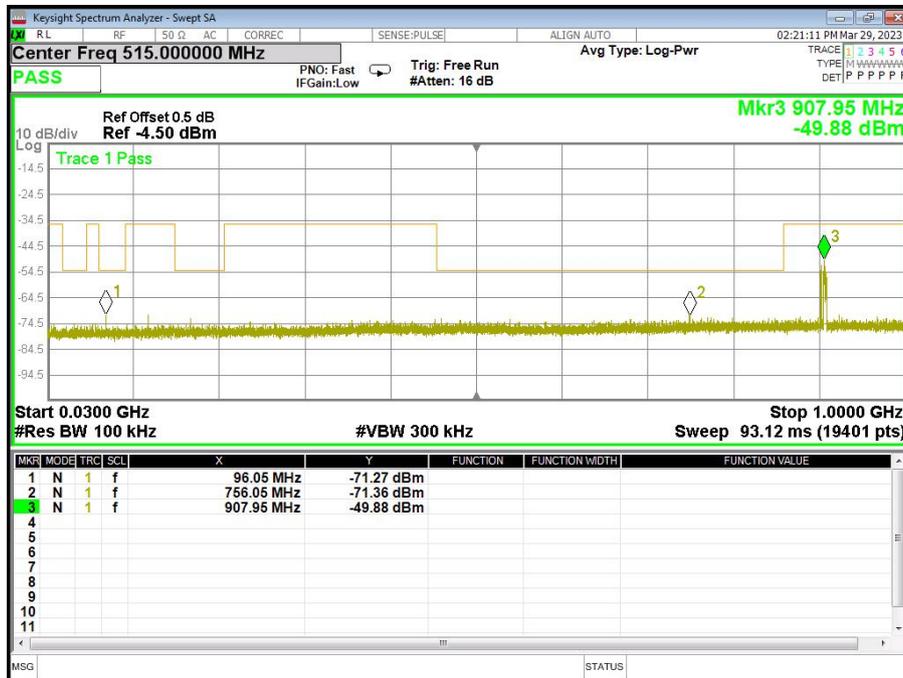



TX 2480MHz

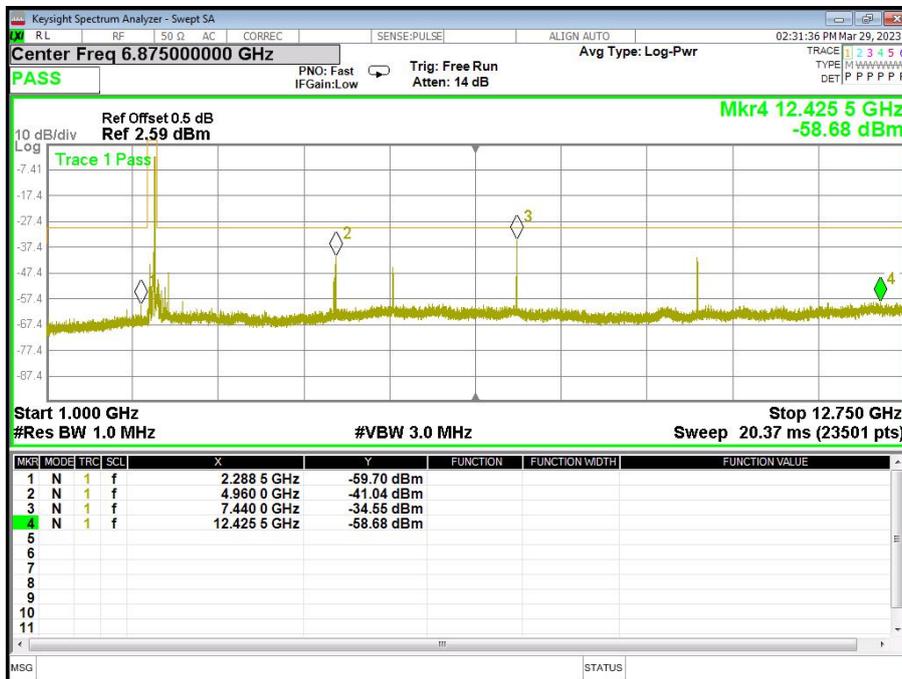



9. SPURIOUS EMISSIONS – RECEIVER

9.1 LIMIT

Clause	Test Item	Frequency(MHz)	Limit
4.3.2.10.3	Spurious emissions	30-1000	-57dBm
	(radiated)	1000-12750	-47dBm

9.2 TEST PROCEDURES

1. Please refer to ETSI EN 300 328 (V2.2.2) clause 5.4.10.1 for the test conditions.
2. Please refer to ETSI EN 300 328 (V2.2.2) clause 5.4.10.2 for the measurement method.

The following table is the setting of the Spectrum Analyzer.

Spectrum Analyzer	Setting	
Frequency Start to Stop	30 MHz to 1000 MHz	1000 MHz to 12750MHz
Resolution bandwidth	100 kHz	1 MHz
Video bandwidth	1 MHz	3 MHz
Filter type	3 dB (Gaussian)	
Detector mode	Peak	
Trace Mode	Max Hold	
Sweep Points	≥ 19 400 (Set as 20000)	≥ 23 500 (Set as 24000)
Sweep Time	For non continuous transmissions (duty cycle less than 100 %), the sweep time shall be sufficiently long,Below 1GHz such that for each 100 kHz frequency step, Above 1GHz such that for each 1MHz frequency step the measurement time is greater than two transmissions of the UUT, on any channel	



- a. The EUT was placed on the top of the turntable in Semi Anechoic Room.
- b. The test shall be made in the receiving mode. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- c. For 30~12750MHz spurious emissions measurement, the broad band bi-log receiving antenna was placed 3 meters far away from the turntable. .
- d. The broadband receiving antenna was fixed on the same height with the EUT to find each suspected emissions of both horizontal and vertical polarization. Each recorded suspected value is indicated as Read Level (Raw).
- e. Replace the EUT by standard antenna and feed the RF port by signal generator.
- f. Adjust the frequency of the signal generator to the suspected emission and slightly rotate the turntable to locate the position with maximum reading.
- g. Adjust the power level of the signal generator to reach the same reading with Read Level (Raw).
- h. The level of the spurious emission is the power level of (7) plus the gain of the standard antenna in dBi and minus the loss of the cable used between the signal generator and the standard antenna.
- i. The measurement shall be repeated at the lowest and the highest channel of the stated frequency range.
- j. EUT Orthogonal Axis:
"X" - denotes Laid on Table; "Y" - denotes Vertical Stand; "Z" - denotes Side Stand.

9.3 TEST SETUP

This test setup layout is the same as that shown in section 8.4

9.4 EUT OPERATION DURING TEST

The EUT was programmed to be in continuously receiving mode.



9.5 TEST RESULT

Remark: The all data rate modes had been test, but only worse test data was recorded in the test report.



RX

Lowest channel





Highest channel

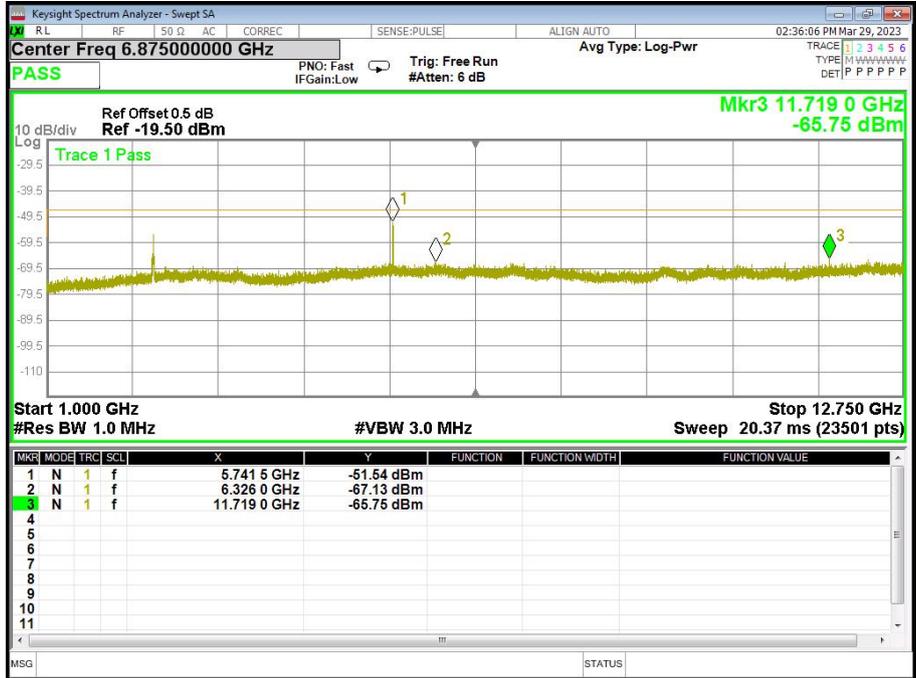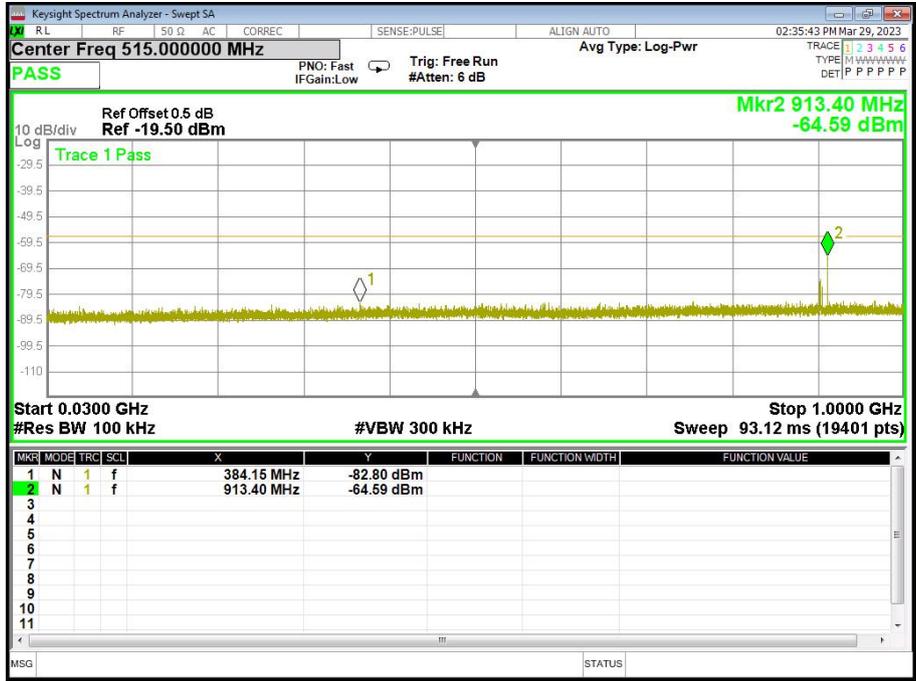

10. RECEIVER BLOCKING

10.1 LIMIT

While maintaining the minimum performance criteria as defined in clause 4.3.2.11.3, the blocking levels at specified frequency offsets shall be equal to or greater than the limits defined for the applicable receiver category provided in table 14, table 15 or table 16.

Receiver Category 1

Table 14: Receiver Blocking parameters for Receiver Category 1 equipment

Wanted signal mean power from companion device (dBm)	Blocking signal frequency (MHz)	Blocking signal power (dBm)	Type of blocking Signal
Pmin + 6 dB	2 380 2 503,5	-53	CW
Pmin + 6 dB	2 300 2 330 2 360	-47	CW
Pmin + 6 dB	2 523,5 2 553,5 2 583,5 2 613,5 2 643,5 2 673,5	-47	CW
NOTE 1: Pmin is the minimum level of the wanted signal (in dBm) required to meet the minimum performance criteria as defined in clause 4.3.2.11.3 in the absence of any blocking signal.			
NOTE 2: The levels specified are levels in front of the UUT antenna. In case of conducted measurements, the levels have to be corrected by the actual antenna assembly gain.			

Receiver Category 2

Table 15: Receiver Blocking parameters for Receiver Category 2 equipment

Wanted signal mean power from companion device (dBm)	Blocking signal frequency (MHz)	Blocking signal power (dBm)	Type of blocking Signal
Pmin + 6 dB	2 380 2 503,5	-57	CW
Pmin + 6 dB	2 300 2 583,5	-47	CW
NOTE 1: Pmin is the minimum level of the wanted signal (in dBm) required to meet the minimum performance criteria as defined in clause 4.3.2.11.3 in the absence of any blocking signal.			
NOTE 2: The levels specified are levels in front of the UUT antenna. In case of conducted measurements, the levels have to be corrected by the actual antenna assembly gain.			

Receiver Category 3

Table 8: Receiver Blocking parameters for Receiver Category 3 equipment

Wanted signal mean power from companion device (dBm)	Blocking signal frequency (MHz)	Blocking signal power (dBm)	Type of blocking Signal
Pmin + 12 dB	2 380 2 503,5	-57	CW
Pmin + 12 dB	2 300 2 583,5	-47	CW


NOTE 1: Pmin is the minimum level of the wanted signal (in dBm) required to meet the minimum performance criteria as defined in clause 4.3.2.11.3 in the absence of any blocking signal.

NOTE 2: The levels specified are levels in front of the UUT antenna. In case of conducted measurements, the levels have to be corrected by the actual antenna assembly gain.

10.2 TEST PROCEDURES

1. Please refer to ETSI EN 300 328 (V2.1.1) clause 5.4.11.1 for the test conditions.
 2. Please refer to ETSI EN 300 328 (V2.1.1) clause 5.4.11.2 for the measurement method.
- RBW: \geq Occupied Channel Bandwidth (use next available RBW setting above the Occupied Channel Bandwidth)
 - Filter type: Channel Filter
 - RBW:1M
 - VBW:3M (Max 2M)
 - Detector Mode: RMS
 - Centre Frequency: Equal to the hopping frequency to be tested
 - Span: 0 Hz
 - Sweep time: > Channel Occupancy Time of the UUT. If the Channel Occupancy Time is non-contiguous (non-LBT based equipment), the sweep time shall be sufficient to cover the period over which the Channel Occupancy Time is spread out.
 - Trace Mode: Clear/Write
 - Trigger Mode: Video

10.3 TEST SETUP

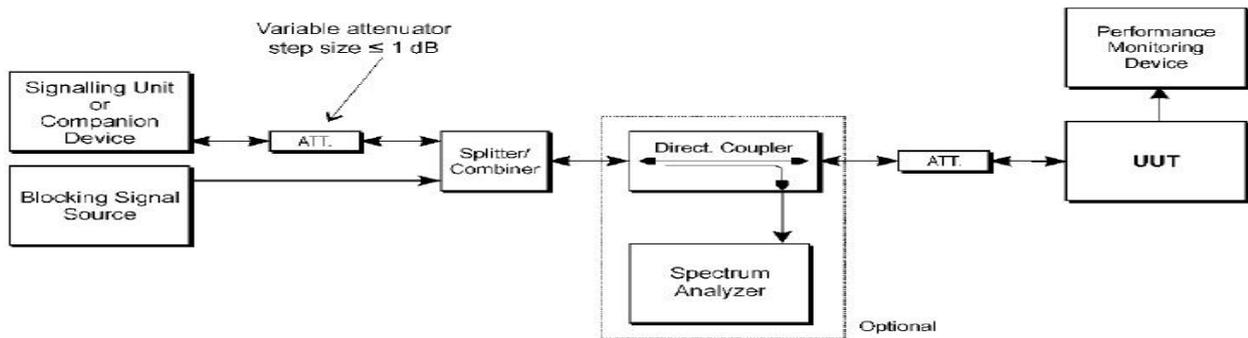

10.4 TEST RESULTS

Note: The power more than 0dBm, less than 10dBm, belong to category 2.

2402MHz

Wanted signal mean power from companion device (dBm)	Blocking signal frequency (MHz)	Blocking signal power(dBm) CW	PER (%)	Limit (%)	Results
-65	2 380 2 503,5	-57	0.10%	≤ 10%	PASS
			0.40%		
	2 300 2 583,5	-47	0.45%		PASS
			0.45%		

NOTE:

- (1) The levels specified are levels in front of the UUT antenna. In case of conducted measurements, the levels have to be corrected by the actual antenna assembly gain.
- (2)The minimum performance criterion shall be a PER less than or equal to 10 %. The manufacturer may declare alternative performance criteria as long as that is appropriate for the intended use of the equipment (see clause 5.4.1.t)).
- (3) Pmin=-71dBm.

2480MHz

Wanted signal mean power from companion device (dBm)	Blocking signal frequency (MHz)	Blocking signal power(dBm) CW	PER (%)	Limit (%)	Results
-65	2 380 2 503,5	-57	0.42%	≤ 10%	PASS
			0.37%		
	2 300 2 583,5	-47	0.19%		PASS
			0.30%		



NOTE:

- (1) The levels specified are levels in front of the UUT antenna. In case of conducted measurements, the levels have to be corrected by the actual antenna assembly gain.
- (2) The minimum performance criterion shall be a PER less than or equal to 10 %. The manufacturer may declare alternative performance criteria as long as that is appropriate for the intended use of the equipment (see clause 5.4.1.t).
- (3) $P_{min} = -71\text{dBm}$.

*****END OF THE REPORT*****



SAFETY TEST REPORT

Report No: FCS202406188A01

Issued for

Applicant:	ShenZhen Diode Optoelectric technology co., LTD
Address:	907, Longhua Haicheng Business Building, Shenzhen
Product Name:	HEATING INSOLES
Brand Name:	N/A
Model Name:	SP-XJ19
Series Model:	SP-XJ14,SP-XJ15,SP-XJ05,SP-XJ16,SP-XJ17 SP-XJ18,SP-XJ20,SP-XJ21,SP-XJ22
Test Standard:	EN 60335-1:2012/A15:2021
Issued By: Dongguan Funas Testing Technology Co.,Ltd Add: Room 105 Floor Bao hao Technology Building 1 NO.15 Gong ye West Road Hi-Tech Industrial, Song shan lake Dongguan Tel: 769-27280901 Fax:769-27280901 http://www.fcs-lab.com	



TEST REPORT
EN 60335-1
HOUSEHOLD AND SIMILAR ELECTRICAL APPLIANCES – SAFETY –
Part 1: General requirements

Report Number.....: FCS202406188A01

Date of issue.....: 2024-07-10

Total number of pages.....: 135 pages

Name of Testing Laboratory preparing the Report.....: Dongguan Funas Testing Technology Co.,Ltd.
Room 105 Floor Bao hao Technology Building 1 NO.15 Gong ye West Road Hi-Tech Industrial, Song shan lake Dongguan

Applicant's name.....: ShenZhen Diode Optoelectric technology co., LTD

Address.....: 907, Longhua Haicheng Business Building, Shenzhen

Test specification:

Standard.....: EN 60335-1:2012/A15:2021

Test procedure.....: Type Test

Non-standard test method.....: N/A

TRF template used.....: IECEE OD-2020-F1:2022, Ed.1.5

Test Report Form No.....: IEC60335_1AA

Test Report Form(s) Originator.....: TÜV SÜD Product Service GmbH

Master TRF.....: Dated 2023-06-01

General disclaimer:

The test results presented in this report relate only to the object tested.

This report shall not be reproduced, except in full, without the written approval of the Issuing Testing Laboratory. The authenticity of this Test Report and its contents can be verified by contacting the responsible for this Test Report.



Test item description :	HEATING INSOLES
Trademark(s) :	N/A
Manufacturer :	Dongguan City fifty-five degrees intelligent technology LTD Jiangrui High Salary Science Park, Liangping West Road, Liaobu Town, Dongguan City, Guangdong Province
Model/Type reference :	SP-XJ19
Ratings :	Input:5V=1A Battery:DC 3.7V

Responsible Testing Laboratory (as applicable), testing procedure and testing location(s):

<input type="checkbox"/>	Testing Laboratory:	Dongguan Funas Testing Technology Co.,Ltd
	Testing location/ address :	Room 105 Floor Bao hao Technology Building 1 NO.15 Gong ye West Road Hi-Tech Industrial, Song shan lake Dongguan
	Tested by (name, function, signature) :	Scott Shen 
	Approved by (name, function, signature) ... :	Wade Huang 



<input type="checkbox"/>	Testing procedure: CTF Stage 1:	
	Testing location/ address :	
	Tested by (name, function, signature) :	
	Approved by (name, function, signature) ... :	

<input type="checkbox"/>	Testing procedure: CTF Stage 2:	
	Testing location/ address :	
	Tested by (name + signature) :	
	Witnessed by (name, function, signature) .. :	
	Approved by (name, function, signature) ... :	



List of Attachments (including a total number of pages in each attachment): - Attachment 1: Photograph (2 pages)	
Summary of testing:	
Tests performed (name of test, test clause and date test performed): - EN 60335-1:2012/A15:2021 The submitted samples were found to comply with the requirements of above specification.	Testing location: Dongguan Funas Testing Technology Co.,Ltd. Room 105 Floor Bao hao Technology Building 1 NO.15 Gong ye,West Road Hi-Tech Industrial, Song shan lake Dongguan
Summary of compliance with National Differences (List of countries addressed): N/A	
<input type="checkbox"/> The product fulfils the requirements of _____ (insert standard number and Year of publication, and delete the text in parenthesis, leave it blank or delete the whole sentence, if not applicable)	

Copy of marking plate:



Notes:

- The above markings are the min. requirements required by the safety standard. For the final production samples, the additional markings which do not give rise to misunderstanding may be added.
- The height dimension of CE and UKCA mark should not less than 5mm, the height dimension of WEEE symbol should not less than 7mm.
- 'Folding washing machine' Silkscreen on the product



Test item particulars :	Electric steamer egg cooker
Classification of installation and use :	Portable appliance and household indoor use
Supply Connection :	AC source
..... :	
Possible test case verdicts:	
- test case does not apply to the test object..... : N/A	
- test object does meet the requirement..... : P (Pass)	
- test object does not meet the requirement..... : F (Fail)	
Testing :	
Date of receipt of test item :	2024-06-26
Date (s) of performance of tests :	2023-06-26 to 2024-07-10
General remarks:	
Name and address of factory (ies) :	Changsha Spark Technology Electronics Co.,Ltd
General product information and other remarks:	
All models series are identical to each other except for models name.	



EN 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict

5	GENERAL CONDITIONS FOR THE TESTS		P
	Tests performed according to clause 5, e.g. nature of supply, sequence of testing, etc.		P
5.8.2	Appliances having more than one rated voltage..		N/A
5.8.3	Heating Appliances and combined appliances marked with a rated power input range.....		N/A
5.8.4	Appliances with a rated voltage range and with a rated power input corresponding to the mean value of the rated voltage range		N/A
6	CLASSIFICATION		P
6.1	Protection against electric shock: Class 0, 0I, I, II, III.....	Class II	P
6.2	Protection against harmful ingress of water	IPX0	P
7	MARKING AND INSTRUCTIONS		P
7.1	Appliances marked with		P
	Rated voltage or voltage range (V).....	220V	N/A
	Symbol for nature of supply, or.....		N/A
	Rated frequency (Hz).....		N/A
	Rated power input (W), or.....	900W	P
	Rated current (A).....		N/A
	Manufacturer's or responsible vendor's name, trademark or identification mark.....	/	P
	Model or type reference.....	See page 1	P
	Symbol IEC 60417-5172, for class II appliances		P
	IP number, other than IPX0.....	IPX0	P
	Symbol IEC 60417-5180, for class III appliances, unless		N/A
	the appliance is operated by batteries only, or		N/A
	the appliance is powered by rechargeable batteries recharged in the appliance		N/A
	Appliance outlets accessible to the user and socket-outlets accessible to the user:		N/A
	- that are incorporated in appliances connected to the supply mains, and		N/A
	- that operate at rated voltage		N/A
	marked with their outlet load (W or A).....		N/A



EN 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Appliances intended to be supplied from a detachable power supply part to recharge the battery marked with:		N/A
	- symbol ISO 7000-0790		N/A
	- symbol IEC 60417-6181		N/A
	- model or type reference of the detachable power supply part, or.....		N/A
	- the substance of the following: "Use only with <model or type reference> supply unit"		N/A
	Symbol IEC 60417-5018, for class II and class III appliances incorporating a functional earth		N/A
	Symbol IEC 60417-5036, for the enclosure of electrically-operated water valves in external hose-sets for connection of an appliance to the water mains, if the working voltage exceeds extra-low voltage		N/A
7.2	stationary appliances for multiple supply:		N/A
	Warning to disconnect all supply circuits		N/A
	Warning placed in vicinity of terminal cover		N/A
7.3	Range of rated values marked with the lower and upper limits separated by a hyphen		N/A
	Different rated values marked with the values separated by an oblique stroke		N/A
	Requirement also applied to appliances for connection to both single phase and multiphase supplies		N/A
7.4	Appliances adjustable for different rated voltages or rated frequencies, the voltage or the frequency setting is clearly discernible		N/A
	frequent changes in voltage or frequency setting not required, adjustment of rated voltage or rated frequency determined from wiring diagram		N/A
	Wiring diagram may be on the inside of a cover that has to be removed to connect the supply conductors		N/A
	Wiring diagram not on a label loosely attached to the appliance		N/A
7.5	Appliances with more than one rated voltage or one or more rated voltage ranges, marked with rated input or rated current for each rated voltage or range, unless		P



EN 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
	the power input or current are related to the arithmetic mean value of the rated voltage range		N/A
	Relation between marking for upper and lower limits of rated power input or rated current and voltage is clear		P
7.6	Correct symbols used		P
	Symbol for nature of supply placed next to rated voltage		P
	Symbol for class II appliances placed unlikely to be confused with other marking		N/A
	Units of physical quantities and their symbols according to international standardized system		P
	Additional symbols give no rise to misunderstanding		N/A
	Symbols specified in IEC60417 and ISO7000 are used.		N/A
7.7	Connection diagram fixed to appliances to be connected to more than two supply conductors and appliances for multiple supply, unless	Single supply voltage range	N/A
	correct mode of connection is obvious		N/A
	For multi-phase appliances, correct mode of connection considered to be obvious if:		N/A
	- indicated by arrows pointing towards the terminals, or		N/A
	- marked in words		N/A
	Connection diagram is the wiring diagram		N/A
7.8	Except for type Z attachment, terminals for connection to the supply mains indicated as follows:		P
	- marking of terminals exclusively for the neutral conductor (letter N)		P
	- marking of protective earthing terminals (symbol IEC 60417-5019)		P
	- marking of functional earthing terminals (symbol IEC 60417-5018)		P
	- marking not placed on removable parts		P
7.9	Marking or placing of switches which may cause a hazard		P
7.10	Indications of switches on stationary appliances and controls on all appliances by use of figures, letters or other visual means.....		N/A



EN 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
	This applies also to switches which are part of a control		N/A
	If figures are used, the off position indicated by the figure 0		N/A
	The figure 0 indicates only OFF position, unless no confusion with the OFF position		N/A
	The figure 0 is used on a digital programming keyboard		N/A
7.11	Indication for direction of adjustment of controls		P
7.12	Instructions for safe use provided in hard copy form	Refer to user manual	P
	Instructions marked on the appliance are visible in normal use		P
	Details concerning precautions during user maintenance		P
	The instructions the substance of the following:		P
	- this appliance is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction concerning use of the appliance by a person responsible for their safety		P
	- children should be supervised not to play with the appliance		P
	For a part of class III construction supplied from a detachable power supply part, the instructions state that the appliance is only to be used with the unit provided		N/A
	Instructions for class III appliances state that it must only be supplied at SELV, unless		N/A
	it is a battery-operated appliance, the battery being charged outside the appliance		N/A
	For appliances for altitudes exceeding 2 000 m, the maximum altitude is stated.....		N/A
	The instructions for appliances incorporating a functional earth state that the appliance incorporates an earth connection for functional purposes		N/A
	The instructions for appliances intended to be connected to a supply for battery recharging state a warning to only use an external supply with the described specifications		



EN 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
	The instructions for appliances intended to be supplied from a detachable power supply part for battery recharging state the type reference of the supply part along with a warning to only use the unit provided with this appliance		N/A
	The instructions for appliances intended for use with batteries using metal-ion chemistries state the normal temperature range for battery charging		N/A
	Meaning of symbol for detachable power supply part explained, unless not used		N/A
7.12.1	Sufficient details for installation supplied		N/A
	For an appliance intended to be permanently connected to the water mains and not connected by a hose-set, this is stated		N/A
	If different rated voltages or different rated frequencies are marked, the instructions state what action to be taken to adjust the appliance		N/A
7.12.2	Stationary appliances not fitted with means for disconnection from the supply mains having a contact separation in all poles that provide full disconnection under overvoltage category III, the instructions state that means for disconnection must be incorporated in the fixed wiring in accordance with the wiring rules		N/A
7.12.3	Insulation of the fixed wiring in contact with parts exceeding 50 K during clause 11; instructions state that the fixed wiring must be protected		N/A
7.12.4	Instructions for built-in appliances:		N/A
	- dimensions of space		N/A
	- dimensions and position of supporting and fixing		N/A
	- minimum distances between parts and surrounding structure		N/A
	- minimum dimensions of ventilating openings and arrangement		N/A
	- connection to supply mains and interconnection of separate components		N/A
	- allow disconnection of the appliance after installation, by accessible plug or a switch in the fixed wiring, unless		N/A
	a switch complying with 24.3		N/A



EN 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
7.12.5	Replacement cord instructions, type X attachment with a specially prepared cord		N/A
	Replacement cord instructions, type Y attachment		N/A
	Replacement cord instructions, type Z attachment		P
	Replacement cord set instructions, if required according to 22.58		N/A
7.12.6	Caution in the instructions for appliances incorporating a non-self-resetting thermal cut-out that is reset by disconnection of the supply mains, if this cut-out is required to comply with the standard		N/A
7.12.7	Instructions for fixed appliances stating how the appliance is to be fixed		N/A
7.12.8	Instructions for appliances connected to the water mains:		N/A
	- max. inlet water pressure (Pa).....		N/A
	- min. inlet water pressure, if necessary (Pa).....		N/A
	Instructions concerning new and old hose-sets for appliances connected to the water mains by detachable hose-sets		N/A
7.12.9	Instructions specified in 7.12 and from 7.12.1 to 7.12.8 are in hard copy form and appear together before any other instructions supplied with the appliance		P
	Alternatively, these instructions may be supplied with the appliance separately from any functional use booklet		P
	They may follow the description of the appliance that identifies parts, or follow the drawings/sketches common to the languages of the instructions		N/A
	They may follow the description of the appliance that identifies parts, or follow the drawings/sketches		P
	In addition, instructions are also available in an alternative format such as on a website or on request in a format such as a DVD.....		N/A
7.13	Instructions and other texts in an official language	English, other should be evaluated during national approval	P
7.14	Markings clearly legible:		P
	Signal words WARNING, CAUTION, DANGER in uppercase having a height as specified.....		P



EN 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Uppercase letter of the text explaining the signal word not smaller than 1,6 mm.....		N/A
	Moulded in, engraved, or stamped markings either raised above or have a depth below the surface of at least 0,25 mm, unless		N/A
	contrasting colours are used		P
	Markings checked by inspection, measurement and rubbing test as specified		P
	Markings clearly durable, and on containers that are likely to be cleaned frequently they are not by means of paint or enamel, other than vitreous enamel		N/A
7.15	Markings specified in 7.1 to 7.5 on a main part	On body	P
	Marking clearly discernible from the outside, if necessary after removal of a cover		N/A
	For portable appliances, cover can be removed or opened without a tool		N/A
	For stationary appliances, name, trademark or identification mark and model or type reference visible after installation		N/A
	For fixed appliances, name, trademark or identification mark and model or type reference visible after installation according to the instructions		N/A
	Indications for switches and controls placed on or near the components. Marking not on parts which can be positioned or repositioned in such a way that the marking is misleading		N/A
	The symbol IEC 60417-5018 placed next to the symbol IEC 60417-5172 or IEC 60417-5180		N/A
	Type reference of detachable power supply part placed next to symbol IEC 60417-6181		N/A
	Marking of outlet load close to appliance outlet or socket-outlet		N/A
8	PROTECTION AGAINST ACCESS TO LIVE PARTS		P
8.1	Adequate protection against accidental contact with live parts		P
8.1.1	Requirement applies for all positions, detachable parts removed unless otherwise specified		P
	Use of test probe B of IEC 61032:		P



EN 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
	- force not exceeding 1 N: no contact with live parts		P
	- force of 20 N: no contact with live parts		P
	- lamps behind a detachable cover not removed, if conditions met		N/A
	- protection against contact with live parts of the lamp cap during lamp insertion or removal		N/A
	Use of test probe 18 of IEC 61032 for non-commercial appliances and commercial appliances intended for public access:		P
	- force not exceeding 1 N: no contact with live parts		P
	- force of 10 N: no contact with live parts		P
	- appliance fully assembled as in normal use, no parts removed		P
	No contact with live parts protected by materials as specified		N/A
8.1.2	Use of test probe 13 of IEC 61032, with a force not exceeding 1 N, through openings in class 0 appliances and class II appliances/constructions: no contact with live parts		P
	Test probe 13 also applied through openings in earthed metal enclosures having a non-conductive coating: no contact with live parts		P
8.1.3	For appliances other than class II, use of test probe 41 of IEC 61032, with a force not exceeding 1 N: no contact with live parts of visible glowing heating elements or supporting parts	No visible glowing heating elements	N/A
	For a single switching action obtained by a switching device, requirements as specified		N/A
	For appliances with a supply cord and without a switching device, the single switching action may be obtained by the withdrawal of the plug		N/A
8.1.4	Appliance supplied at rated voltage (V).....		N/A
	Accessible part not considered live if:		N/A
	- safety extra-low AC voltage: peak value not exceeding 42,4 V		N/A
	- safety extra-low DC voltage: not exceeding 42,4 V		N/A
	- or separated from live parts by protective impedance		N/A



EN 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
	If protective impedance: DC current not exceeding 2 mA, and		N/A
	AC peak value not exceeding 0,7 mA		N/A
	- for peak values over 42,4 V up to and including 450 V, capacitance not exceeding 0,1 mF		N/A
	- for peak values over 450 V up to and including 15 kV, discharge not exceeding 45 mC		N/A
	- for peak values over 15 kV, the energy in the discharge not exceeding 350 mJ		N/A
8.1.5	Live parts protected at least by basic insulation before installation or assembly:		N/A
	- built-in appliances		N/A
	- fixed appliances		N/A
	- appliances delivered in separate units		N/A
8.2	Class II appliances and constructions constructed so that there is adequate protection against accidental contact with basic insulation and metal parts separated from live parts by basic insulation only		P
	Only possible to touch parts separated from live parts by double or reinforced insulation		P
8.3	For battery-operated appliances with a functional earth or supply connection, parts within a battery compartment only accessible if:		N/A
	- class I, 0I and II appliances: separated from live parts by double and reinforced insulation		N/A
	- class 0 appliances: separated from live parts by basic insulation		N/A
	- battery compartment of class III construction, and basic insulation in addition to supply at SELV, if limits in 8.1.4 exceeded		N/A
9	STARTING OF MOTOR-OPERATED APPLIANCES		N/A
	Requirements and tests are specified in part 2 when necessary		N/A
10	POWER INPUT AND CURRENT		P
10.1	Appliance supplied at rated voltage (V):	(see appended table)	P
	Power input at normal operating temperature and normal operation not deviating from rated power input by more than shown in Table 1		P



EN 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
	If the power input varies throughout the operating cycle and its maximum value exceeds twice its arithmetic mean value occurring during a representative period, the power input is the maximum value that is exceeded for more than 10 % of the representative period if this value is greater than the arithmetic mean value,		N/A
	otherwise the power input is the arithmetic mean value		N/A
	In case of doubt, the power input of the motors may be measured separately		P
	In case of measurement during a representative period, duration of the representative period.....:		N/A
	Test carried out at upper and lower limits of the ranges for appliances with one or more rated voltage ranges, unless		N/A
	the rated power input is related to the arithmetic mean value of the relevant range		N/A
	Appliance outlets accessible to the user and socket-outlets accessible to the user incorporated in appliances connected to the supply mains and operating at rated voltage are not loaded during test,		N/A
	however, their contribution to the power input is considered to be the marked outlet load per appliance outlet or socket-outlet		N/A
10.2	Appliance supplied at rated voltage (V).....		N/A
	Current at normal operating temperature and normal operation not deviating from rated current by more than shown in Table 2		N/A
	If the current varies throughout the operating cycle and its maximum value exceeds twice its arithmetic mean value occurring during a representative period, the current is the maximum value that is exceeded for more than 10 % of the representative period if this value is greater than the arithmetic mean value,		N/A
	otherwise the current is the arithmetic mean value		N/A
	In case of doubt, the current of the motors may be measured separately	(See appended table)	N/A



EN 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
	In case of measurement during a representative period, duration of the representative period.....:		N/A
	Test carried out at upper and lower limits of the ranges for appliances with one or more rated voltage ranges, unless		N/A
	the rated current is related to the arithmetic mean value of the relevant range		N/A
	Appliance outlets and socket-outlets accessible to the user incorporated in appliances connected to the supply mains and operating at rated voltage are not loaded during test,		N/A
	however, their contribution to the current is considered to be the marked outlet load per appliance outlet or socket-outlet		N/A
11	HEATING		P
11.1	No excessive temperatures in normal use		P
11.2	The appliance is held, placed or fixed in position as described.....		P
11.3	Temperature rises, other than of windings, determined by thermocouples		P
	Temperature rises of windings determined by resistance method, unless		N/A
	the windings are non-uniform or it is difficult to make the necessary connections		P
11.4	Heating appliances operated under normal operation at 1,15 times rated power input (W)...		N/A
11.5	Motor operated appliances operated under normal operation at most unfavourable voltage between 0,94 and 1,06 times rated voltage (V)...	Both at 1.1 times and at 0.94 times rated voltage (requested by applicant)	P
11.6	Combined appliances operated under normal operation at most unfavourable voltage between 0,94 and 1,06 times rated voltage (V)...		N/A
11.7	Appliance outlets and socket-outlets accessible to the user loaded with a resistive load that gives the marked outlet load		P
	For appliances incorporating integral batteries or separable batteries not disconnected from the appliance during charging:		N/A
	- the fully discharged battery is charged for 1 h, while the appliance is operated continuously performing its intended function		



EN 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
	- the fully discharged battery is charged for 24 h or until it is fully charged, without the appliance performing its intended function		N/A
11.8	Temperature rises monitored continuously and not exceeding the values in Table 3.....	(see appended table)	P
	If the temperature rise of a motor winding exceeds the value of Table 3, or		N/A
	if there is doubt with regard to classification of insulation		N/A
	tests of Annex C are carried out		N/A
	Sealing compound does not flow out		N/A
	Protective devices do not operate, except		P
	components in protective electronic circuits tested for the number of cycles specified in 24.1.4		N/A
12	CHARGING OF METAL-ION BATTERIES		N/A
	Charging a battery that uses metal-ion chemistry does not cause any cell to exceed its operating region for charging		N/A
	Fully discharged battery is charged with the charging system indicated in the instructions at an ambient temperature of 20 °C ± 5 °C		N/A
	Test repeated at:		N/A
	- minimum ambient temperature, if specified to be less than 10 °C by the manufacturer (°C).....		N/A
	- at maximum ambient temperature, if specified to be greater than 40 °C by the manufacturer (°C).....		N/A
	For all individual cells, the voltage, temperature and charging current are monitored.....	(See appended table)	N/A
	For parallel configuration, analysis used to avoid measuring the individual branch currents,		N/A
	the test result not exceeding the specified operating region for charging		N/A
	Location of thermocouples for each cell temperature measurement on the outer surface, halfway along the longest dimension of the cell		N/A
	For each cell, the specified operating region for charging specified by the cell manufacturer is not exceeded at the temperature of the cell		N/A



EN 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
	For batteries where cells are configured in series, the test is repeated with the charge in one battery deliberately imbalanced, the imbalance being introduced into a fully discharged battery by charging one cell to:		N/A
	- approximately 50 % of its full charge, or		N/A
	- less than 50 % of its full charge, if it is demonstrated as specified that this would occur in normal operation		N/A
13	LEAKAGE CURRENT AND ELECTRIC STRENGTH AT OPERATING TEMPERATURE		P
13.1	Leakage current not excessive and electric strength adequate		P
	Heating appliances operated at 1,15 times the rated power input (W).....		N/A
	Motor-operated appliances and combined appliances supplied at 1,06 times the rated voltage (V).....		P
	Protective impedance and radio interference filters disconnected before carrying out the tests		P
13.2	The leakage current is measured by means of the circuit described in Figure 4 of IEC 60990:2016		P
	For class 0I appliances and class I appliances, except parts of class II construction, C replaced by a low impedance ammeter		N/A
	Leakage current measurements..... (see appended table)		P
13.3	The appliance is disconnected from the supply		P
	Electric strength tests according to Table 4..... (see appended table)		P
	No breakdown during the tests		P
14	TRANSIENT OVERVOLTAGES		P
	Appliances withstand the transient over-voltages to which they may be subjected		P
	Clearances having a value less than specified in Table 16 subjected to an impulse voltage test, the test voltage specified in Table 6.....	(See appended table)	N/A
	No flashover during the test, unless		N/A
	of functional insulation if the appliance complies with clause 19 with the clearance short-circuited		N/A
15	MOISTURE RESISTANCE		P



EN 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
15.1	Enclosure provides the degree of moisture protection according to classification of the appliance	Ordinary	P
	Compliance checked as specified in 15.1.1, taking into account 15.1.2, followed by the electric strength test of 16.3		N/A
	No trace of water on insulation which can result in a reduction of clearances or creepage distances below values specified in clause 29		N/A
	No water in the enclosure of appliances and parts of appliances with pins for insertion into socket-outlets		N/A
15.1.1	Appliances, other than IPX0, subjected to tests as specified in IEC 60529:1989 including IEC 60529:1989/AMD1:1999 and IEC 60529:1989/AMD2:2013.....	IPX0	P
	Water valves containing live parts in external hoses for connection of an appliance to the water mains tested as specified for IPX7 appliances		N/A
15.1.2	Hand-held appliances turned continuously through the most unfavourable positions during the test		N/A
	Appliances with an automatic cord reel are tested according to 15.1.1 with the supply cord unreeled, coiled and reeled again as specified, and		N/A
	for fixed appliances mounted on the wall or ceiling, the cord is dropped from the minimum height as specified in the instructions before being coiled		N/A
	Built-in appliances installed according to the instructions		N/A
	Appliances placed or used on the floor or table placed on a horizontal unperforated support		N/A
	Appliances normally fixed to a wall are mounted on a wooden board		N/A
	Appliances and parts of appliances with integral pins for insertion into socket-outlets are held by the pins in the most unfavourable position without being mounted in a socket-outlet		N/A
	For IPX3 appliances, the base of wall mounted appliances is placed at the same level as the pivot axis of the oscillating tube		N/A



EN 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
	For IPX4 appliances, the horizontal centre line of the appliance is aligned with the pivot axis of the oscillating tube, and		N/A
	for appliances normally used on the floor or table, the movement is limited to two times 90° for a period of 5 min, the support being placed at the level of the pivot axis of the oscillating tube		N/A
	Wall-mounted appliances with the distance to the floor stated in the instructions are tested with a board placed accordingly under the appliance		N/A
	Appliances normally fixed to a ceiling are mounted underneath a horizontal unperforated support, the pivot axis of the oscillating tube located at the level of the underside of the support, and		N/A
	for IPX4 appliances, the movement of the tube is limited to two times 90° from the vertical for a period of 5 min		N/A
	Appliances with type X attachment fitted with a flexible cord as described, unless		N/A
	having a specially prepared cord		N/A
	Detachable parts removed and subjected to the relevant treatment with the main part, however not removed if the instructions state that the part must be removed for user maintenance and a tool is needed		N/A
15.2	Spillage of liquid does not affect the electrical insulation		N/A
	Spillage solution comprising water containing approximately 1 % NaCl and 0,6 % rinsing agent		N/A
	Appliances with type X attachment fitted with a flexible cord as described, unless		N/A
	having a specially prepared cord		N/A
	Appliances incorporating an appliance inlet tested with or without a connector, whichever is most unfavourable		N/A
	Detachable parts are removed		N/A
	Overfilling test with additional amount of the solution, over a period of 1 min (l).....		N/A



EN 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Non-ionic rinsing agent complies with the specified properties		N/A
	The appliance withstands the electric strength test of 16.3		N/A
	No trace of water on insulation that can result in a reduction of clearances or creepage distances below values specified in clause 29		N/A
15.3	Appliances proof against humid conditions		P
	Checked by test Cab: Damp heat steady state in IEC 60068-2-78		P
	Cable entries, if any, left open		P
	If knock-outs provided, one of them opened	30°C, 93% R.H. for 48 h	P
	Detachable parts removed and subjected, if necessary, to the humidity test with the main part		P
	Humidity test for 48 h in a humidity cabinet		P
	Reassembly of those parts that may have been removed		N/A
	The appliance withstands the tests of clause 16		N/A
16	LEAKAGE CURRENT AND ELECTRIC STRENGTH		P
16.1	Leakage current not excessive and electric strength adequate		P
	Protective impedance disconnected from live parts before carrying out the tests		P
	Tests carried out at room temperature and not connected to the supply		P
16.2	Single-phase appliances: test voltage 1,06 times rated voltage (V).....	(see appended table)	P
	Three-phase appliances: test voltage 1,06 times rated voltage divided by $\sqrt{3}$ (V).....		N/A
	Leakage current measurements.....	(see appended table)	P
	Limit values doubled if:		N/A
	- all controls have an off position in all poles, or		N/A
	- the appliance has no control other than a thermal cut-out, or		N/A
	all thermostats, temperature limiters and energy regulators do not have an off position, or		N/A
	- the appliance has radio interference filters		N/A



EN 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
	With the radio interference filters disconnected, the leakage current does not exceed limits specified.....	(See appended table)	N/A
16.3	Electric strength tests according to Table 7.....	(See appended table)	P
	No breakdown during the tests		P
17	OVERLOAD PROTECTION OF TRANSFORMERS AND ASSOCIATED CIRCUITS		P
	No excessive temperatures in transformer or associated circuits in event of short-circuits likely to occur in normal use.....	(see appended table)	P
	Appliance supplied with 1,06 or 0,94 times rated voltage under the most unfavourable short-circuit or overload likely to occur in normal use (V).....		P
	Basic insulation is not short-circuited		P
	Temperature rise of insulation of the conductors of safety extra-low voltage circuits not exceeding the relevant value specified in Table 3 by more than 15 K		P
	Temperature of the winding not exceeding the value specified in Table 8		P
	However, limits do not apply to fail-safe transformers complying with subclause 15.5 of IEC 61558-1:2017		N/A
18	ENDURANCE		N/A
	Requirements and tests can be specified in part 2		N/A
19	ABNORMAL OPERATION		P
19.1	The risk of fire, mechanical damage or electric shock under abnormal or careless operation obviated		P
	Electronic circuits so designed and applied that a fault will not render the appliance unsafe :	(see appended table)	P
	Appliances incorporating heating elements subjected to the tests of 19.2 and 19.3, and		N/A
	if the appliance also has a control that limits the temperature during clause 11 it is subjected to the test of 19.4, and		N/A
	if applicable, to the test of 19.5		N/A
	Appliances incorporating PTC heating elements are also subjected to the test of 19.6		N/A



EN 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Appliances incorporating motors subjected to the tests of 19.7 to 19.10, as applicable		N/A
	Appliances incorporating electronic circuits subjected to the tests of 19.11 and 19.12, as applicable		P
	Appliances incorporating contactors or relays subjected to the test of 19.14, being carried out before the tests of 19.11		N/A
	Appliances incorporating voltage selector switches subjected to the test of 19.15		N/A
	Appliances having a mains connection and replaceable batteries subjected to the test of 19.16		N/A
	Appliances incorporating rechargeable batteries that use metal-ion chemistries subjected to the test of 19.17		N/A
	Unless otherwise specified, the tests are continued until a non-self-resetting thermal cut-out operates, or		N/A
	until steady conditions are established		N/A
	If a heating element or an intentionally weak part becomes open-circuited, the relevant test is repeated on a second sample, and		N/A
	that same part on the second sample does also become permanently open-circuited in the second test		N/A
	unless a non-self-resetting thermal cut-out operates or steady conditions are established		N/A
19.2	Test of appliances with heating elements with restricted heat dissipation; test voltage (V), power input of 0,85 times rated power input or if marked with a voltage range 0,85 times the calculated power input at the lower limit of the range (W) See 5.8.4 Power input = $0,85 \times (V_L/V_m)^2$ See clause 10		N/A
19.3	Test of 19.2 repeated; test voltage (V), power input of 1,24 times rated power input or if marked with a voltage range 1,24 times the calculated power input at the upper limit of the range (W)..... See 5.8.4 Power input = $1,24 \times (V_u/V_m)^2$ See clause 10		N/A



EN 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
19.4	Test conditions as in clause 11, any control limiting the temperature during tests of clause 11 short circuited		N/A
19.5	Test of 19.4 repeated on class 0I and I appliances with tubular sheathed or embedded heating elements. No short-circuiting, but one end of the element connected to the sheath		N/A
	The test repeated with reversed polarity and the other end of the heating element connected to the sheath		N/A
	The test is not carried out on appliances intended to be permanently connected to fixed wiring, on appliances where an all-pole disconnection occurs during the test of 19.4, or on appliances used in a system with polarized plugs intended for connection to polarized socket outlets		N/A
19.6	Appliances with PTC heating elements tested at rated voltage, establishing steady conditions		N/A
	The working voltage of the PTC heating element is increased by 5 % and the appliance is operated until steady conditions are re-established. The voltage is then increased in similar steps until 1,5 times working voltage or until the PTC heating element ruptures (V).....		N/A
19.7	Stalling test by locking the rotor if the locked rotor torque is smaller than the full load torque, or Note: See DSH 543AA (also applicable to iron cored transformers)		N/A
	locking moving parts of other appliances		N/A
	Locked rotor, capacitors open-circuited one at a time		N/A
	Test repeated with capacitors short-circuited one at a time, unless		N/A
	the capacitor is of class S2 or S3 of IEC 60252-1:2010 including IEC 60252-1:2010/AMD1:2013		N/A
	Appliances with timer or programmer supplied with rated voltage for each of the tests, for a period equal to the maximum period allowed.....		N/A



EN 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
	An electronic timer or programmer that operates to ensure compliance with the test before the maximum period under the conditions of Clause 11 is reached, is a protective electronic circuit		N/A
	Other appliances supplied with rated voltage for a period as specified.....		N/A
	Winding temperatures not exceeding values specified in Table 8.....		N/A
19.8	Multi phase motors operated at rated voltage with one phase disconnected (V).....		N/A
19.9	Running overload test on appliances incorporating motors intended to be remotely or automatically controlled or liable to be operated continuously		N/A
	Motor-operated and combined appliances for which 30.2.3 is applicable and that use overload protective devices relying on electronic circuits to protect the motor windings, are also subjected to the test		N/A
	Winding temperatures not exceeding values as specified.....		N/A
19.10	Series motor operated at 1,3 times rated voltage for 1 min (V).....		N/A
	During the test, parts not being ejected from the appliance		N/A
19.11	Electronic circuits, compliance checked by evaluation of the fault conditions specified in 19.11.2 for all circuits or parts of circuits, unless		P
	they comply with the conditions specified in 19.11.1		N/A
	Appliances incorporating an electronic circuit that relies upon a programmable component to function correctly, subjected to the test of 19.11.4.8, unless		N/A
	restarting does not result in a hazard		N/A
	Appliances having a device with an off position obtained by electronic disconnection, or a device placing the appliance in a stand-by mode, subjected to the tests of 19.11.4		N/A
	If the safety of the appliance under any of the fault conditions depends on the operation of a miniature fuse-link complying with IEC 60127, the test of 19.12 is carried out		N/A



EN 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
	During and after each test the following is checked:		P
	- the temperature of the windings does not exceed the values specified in Table 8		P
	the appliance complies with the conditions specified in 19.13		P
	- any current flowing through protective impedance not exceeding the limits specified in 8.1.4		P
	If a conductor of a printed board becomes open-circuited, the appliance is considered to have withstood the particular test, provided both of the following conditions are met:		N/A
	- the base material of the printed circuit board withstands the test of normative Annex E		N/A
	- any loosened conductor does not reduce clearance or creepage distances between live parts and accessible metal parts below the values specified in clause 29		N/A
19.11.1	Fault conditions a) to g) in 19.11.2 are not applied to circuits or parts of circuits meeting both of the following conditions:		N/A
	- the electronic circuit is a low-power circuit, that is, the maximum power at low-power points does not exceed 15 W according to the tests specified with the appliance supplied at rated voltage (V) :		N/A
	- the protection against electric shock, fire hazard, mechanical hazard or dangerous malfunction of other parts of the appliance does not rely on the correct functioning of the electronic circuit		N/A
19.11.2	Fault conditions applied one at a time, the appliance operating under conditions specified in clause 11, but supplied at rated voltage duration of the tests as specified:		P
	Appliance supplied at rated voltage (V).....		P
	a) short circuit of functional insulation if clearances or creepage distances are less than the values specified in clause 29		N/A
	b) open circuit at the terminals of any component		P
	c) short circuit of capacitors, unless		P
	they comply with IEC 60384-14:2013 including IEC 60384-14:2013/AMD:2016		P



EN 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
	d) short circuit of any two terminals of an electronic component, other than integrated circuits		N/A
	This fault condition is not applied between the two circuits of an optocoupler		N/A
	f) failure of microprocessors and integrated circuits		P
	g) failure of an electronic power switching device		P
	Each low power circuit is short-circuited by connecting the low-power point to the pole of the supply source from which the measurements were made		N/A
	Any cord between a battery-operated appliance consuming more than 15 W and the detachable power supply part short-circuited as specified		N/A
19.11.3	If the appliance incorporates a protective electronic circuit that operates to ensure compliance with clause 19, the appliance is tested as specified		P
19.11.4	Appliances having a device with an off position obtained by electronic disconnection, or		N/A
	a device that can be placed in the stand-by mode,		N/A
	subjected to the tests of 19.11.4.1 to 19.11.4.7, the device being set in the off position or in the stand-by mode with the appliance supplied at rated voltage (V)..... Note: In general, the result is not affected by the test frequency if a frequency range is marked.		N/A
	Appliances incorporating a protective electronic circuit subjected to the tests of 19.11.4.1 to 19.11.4.7, the tests being carried out after the protective electronic circuit has operated as specified, however		N/A
	tests of electromagnetic phenomena not applied to protective electronic circuits operating during 19.7 in appliances that are used while attended		N/A
	Surge protective devices disconnected, unless		N/A
	they incorporate spark gaps		N/A



EN 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
19.11.4.1	The appliance is subjected to electrostatic discharges in accordance with IEC 61000-4-2, test level 4		N/A
19.11.4.2	The appliance is subjected to radiated fields in accordance with IEC 61000-4-3, at frequency ranges as specified		N/A
19.11.4.3	The appliance is subjected to fast transient bursts in accordance with IEC 61000-4-4, test level 3 or 4 as specified		P
19.11.4.4	The power supply terminals of the appliance subjected to voltage surges in accordance with IEC 61000-4-5 as specified		P
	An open circuit test voltage of 2 kV is applicable for the line-to-line coupling mode		P
	An open circuit test voltage of 4 kV is applicable for the line-to-earth coupling mode		P
	Earthed heating elements in class I appliances disconnected		N/A
	For appliances having surge arresters incorporating spark gaps, tests repeated at 95 % of the flashover voltage		N/A
19.11.4.5	The appliance is subjected to injected currents in accordance with IEC 61000-4-6, test level 3		N/A
19.11.4.6	Appliances having a rated current not exceeding 16 A are subjected to the class 3 voltage dips and interruptions in accordance with IEC 61000-4-11:2020		N/A
19.11.4.7	The appliance is subjected to mains signals in accordance with IEC 61000-4-13:2002 including IEC 61000-4-13:2002/AMD1:2009 and IEC 61000-4-13:2002/AMD2:2015, test level class 2		N/A
19.11.4.8	The appliance is operated under normal operation and supplied at rated voltage (V).....		N/A
	After 60 s the power supply is reduced to a level such that the appliance ceases to respond or parts controlled by the programmable component cease to operate		N/A
	The appliance continues to operate normally, or		N/A
	requires a manual operation to restart		N/A



EN 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
19.12	If the safety of the appliance for any of the fault conditions specified in 19.11.2 depends on the operation of a miniature fuse-link complying with IEC 60127, the test is repeated, measuring the current flowing through the fuse-link; measured current (A); current rating of the fuse-link (A).....		P
19.13	During the tests the appliance does not emit flames, molten metal, poisonous or ignitable gas in hazardous amounts		P
	Temperature rises not exceeding the values shown in table 9.....	(see appended table)	P
	Compliance with clause 8 not impaired		P
	If the appliance can still be operated, it complies with 20.2		N/A
	Insulation, other than of class III appliances or class III constructions that do not contain live parts, withstands the electric strength test of 16.3, the test voltage as specified in Table 4:		N/A
	basic insulation (V).....		N/A
	- supplementary insulation (V).....		N/A
	- reinforced insulation (V).....		N/A
	After operation or interruption of a control, clearances and creepage distances across the functional insulation withstand the electric strength test of 16.3, the test voltage being twice the working voltage		N/A
	The appliance does not undergo a dangerous malfunction, and		N/A
	no failure of protective electronic circuits, if the appliance is still operable		N/A
	For accessible safety extra-low voltage outlets, connectors, or USB outlets, no increase of the no-load output voltage by more than 3 V or 10 % of the voltage in normal use, whichever higher, with a maximum/peak of 42,4 VDC/VAC		N/A
	Appliances tested with an electronic switch in the off position, or in the stand-by mode:		N/A
	- do not become operational, or		N/A
	- if they become operational, do not result in a dangerous malfunction during or after the tests of 19.11.4		N/A
	If the appliance contains lids or doors that are controlled by one or more interlocks, one of the interlocks may be released provided that both:		N/A



EN 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
	- the lid or door does not move automatically to an open position when the interlock is released, and		N/A
	- the appliance does not start after the cycle in which the interlock was released		N/A
19.14	Appliances operated under the conditions of clause 11, any contactor or relay contact operating under the conditions of clause 11 being short-circuited		N/A
	For a relay or contactor with more than one contact, all contacts are short-circuited at the same time		N/A
	A relay or contactor operating only to ensure the appliance is energized for normal use is not short-circuited		N/A
	If more than one relay or contactor operates in clause 11, they are short-circuited in turn		N/A
	If the appliance has several modes of operation, the tests are carried out with the appliance operating in each mode, if necessary		N/A
19.15	For appliances with a mains voltage selector switch, the switch is set to the lowest rated voltage position and the highest value of rated voltage is applied		N/A
19.16	Appliances having mains connection and replaceable batteries supplied at rated voltage and operated under normal operation but with batteries removed or in any position allowed by construction		N/A
19.17	For battery-operated appliances incorporating a battery using metal-ion chemistry, the battery system is operated according to the instructions and tested under the following conditions, duration as specified		N/A
	a) series configured battery:		N/A
	- imbalance introduced into fully discharged battery by charging one cell to the percentage of being fully charged applied during the test of Clause 12;		N/A
	- single cell or parallel only configured battery: fully discharged		N/A
	b) series configured battery: imbalance introduced as specified and fully charged, if the test of clause 12 was conducted with an imbalance of less than 50 % and if a single fault in the circuitry results in the loss of maintaining balance		N/A



EN 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
	c) series configured battery: cells at 50 % of full charge, except one which is shortened, battery then fully charged		N/A
	d) fully charged battery connected to the charging system: short circuit introduced to the charging system as specified to produce the most unfavourable results, and for a charging system with a cord connecting to the battery, short circuit introduced at a point producing the most adverse effects; resistance of short circuit not exceeding 10 mW		N/A
	No explosion or ignition of the battery during or after the test		N/A
	Voltage on any cell not exceeding upper limit charging voltage by more than 150 mV, unless		N/A
	charging system permanently disabled from recharging battery, checked as specified		N/A
	Recharging considered to be permanently disabled, if:		N/A
	- battery discharged to approximately 50 % of full charge, by using the battery-operated appliance tested (in case of an integral battery), or		N/A
	by using a new sample of the battery-operated appliance (in case of a detachable and separable battery)		N/A
	- attempt made to recharge battery normally		N/A
	- no charging current after 10 min or after 25 % of the nominal capacity has been delivered, whichever occurs first		N/A
20	STABILITY AND MECHANICAL HAZARDS		P
20.1	Appliances having adequate stability		P
	Tilting test through an angle of 10°, appliance placed on an inclined plane/horizontal support, not connected to the supply mains; appliance does not overturn		N/A
	Tilting test repeated on appliances with heating elements, angle of inclination increased to 15°		N/A
	Possible heating test in overturned position; temperature rise does not exceed values shown in Table 9		N/A
20.2	Moving parts adequately arranged or enclosed as to provide protection against personal injury		N/A



EN 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Protective enclosures, guards and similar parts are non-detachable, and		P
	have adequate mechanical strength		P
	Enclosures that can be opened by overriding an interlock are considered to be detachable parts		N/A
	Self resetting thermal cut outs and overcurrent protective devices not causing a hazard by unexpected closure		N/A
	Not possible to touch dangerous moving parts with the test probes, checked by		N/A
	- inspection		N/A
	- test of 21.1		N/A
	- applying a force not exceeding 5 N by means of a test probe similar to test probe B of IEC 61032 but having a circular stop face with a diameter of 50 mm, instead of the noncircular face		N/A
	Checked by applying 3 blows to every point of the enclosure likely to be weak, in accordance with test Ehb of IEC 60068-2-75, spring hammer test, with an impact energy of 0,5 J		N/A
	Appliances and parts of appliances having pins for insertion into mains socket-outlets subjected to the test, Free fall repeated, procedure 2, of IEC 60068-2-31, under the specified conditions		N/A
	The appliance shows no damage impairing compliance with this standard, and		N/A
	compliance with 8.1, 15.1 and clause 29 not impaired		N/A
	If doubt, supplementary or reinforced insulation subjected to the electric strength test of 16.3		N/A
	If necessary, repetition of groups of three blows on a new sample		N/A
21.2	Accessible parts of solid insulation having strength to prevent penetration by sharp implements		P
	Test not applicable if the thickness of supplementary insulation is at least 1 mm and reinforced insulation at least 2 mm	Thickness of enclosure: min. 2.0mm	P
	The insulation is tested as specified, and does withstand the electric strength test of 16.3		P



EN 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
21.3	Appliances with pins for insertion into socket-outlets with a rotating plug part are provided with a mechanical stop to prevent rotation having adequate mechanical strength and constructed to withstand rough handling		N/A
	Application of a torque of 2 Nm for 1 min does not result in rotation of the plug part after rotating it until the mechanical stop prevents further rotation, both directions checked		N/A
22	CONSTRUCTION		P
22.1	Appliance marked with the first numeral or any of the additional letters of the IP system	IPX0	P
22.2	Stationary appliance: means to ensure disconnection from the supply being provided:		P
	- a supply cord fitted with a plug, or		N/A
	- a switch providing all-pole disconnection complying with 24.3, or		N/A
	- an appliance inlet		N/A
	Single-pole switches and single-pole protective devices for the disconnection of heating elements in single-phase, permanently connected class 0I and class I appliances, connected to the line conductor		N/A
22.3	Appliance provided with pins: no undue strain on socket-outlets		N/A
	Means for retaining pins withstand the forces to which the pins are like to be subjected in normal use		N/A
	Applied torque not exceeding 0,25 Nm, torque to keep the socket-outlet itself in the vertical plane not included in this value		N/A
	Pull force of 50 N for 1 min to each pin after the appliance has being placed in the heating cabinet; when cooled to room temperature the pins are not displaced by more than 1 mm		N/A
	Each pin subjected to a torque of 0,4 Nm; the pins are not rotating, unless		N/A
	rotating does not impair compliance with this standard		N/A
22.4	Appliance for heating liquids and appliance causing undue vibration not provided with pins for insertion into socket-outlets		N/A



EN 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
22.5	No risk of electric shock from charged capacitors resulting in a capacitance equal or greater than 0,1 F when touching pins, the appliance being disconnected from the supply at the instant of voltage peak		N/A
	Appliance supplied at rated voltage (V).....		N/A
	Voltage not exceeding 34 V (V).....		N/A
	If compliance relies on the operation of an electronic circuit, the electromagnetic phenomena tests of 19.11.4.3 and 19.11.4.4 are applied		N/A
	The test for measuring the voltage between the pins of the plug is then repeated three times, voltage not exceeding 34 V (V).....		N/A
22.6	Electrical insulation not affected by condensing water or leaking liquid		P
	Electrical insulation of class II appliances not affected if a hose ruptures or seal leaks		P
	In case of doubt, test as described		N/A
22.7	Adequate safeguards against the risk of excessive pressure in appliances containing liquid or gases or having steam-producing devices		N/A
22.8	Electrical connections not subject to pulling during cleaning of compartments to which access can be gained without the aid of a tool, and that are likely to be cleaned in normal use		N/A
22.9	Insulation, internal wiring, windings, commutators and slip rings not exposed to oil, grease or similar substances, unless		P
	the substance has adequate insulating properties		N/A
22.10	Not possible to reset voltage-maintained non-self-resetting thermal cut-outs by the operation of an automatic switching device incorporated within the appliance, if:		N/A
	- a non-self-resetting thermal cut-out is required by the standard, and		N/A
	- a voltage maintained non-self-resetting thermal cut-out is used to meet it		N/A
	Non-self-resetting thermal motor protectors have a trip-free action, unless		N/A
	they are voltage maintained		N/A



EN 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Reset buttons of non-self-resetting controls so located or protected that accidental resetting is unlikely		N/A
22.11	Reliable fixing of non-detachable parts that provide the necessary degree of protection against electric shock, moisture or contact with moving parts		P
	Obvious locked position of snap-in devices used for fixing such parts		N/A
	No deterioration of the fixing properties of snap-in devices used in parts that are likely to be removed during installation or servicing		N/A
	Tests as described	50N, 10s applied on enclosure	P
22.12	Handles, knobs, etc. fixed in a reliable manner, if loosening could result in a hazard, including a choking hazard		N/A
	Requirement concerning the choking hazard does not apply to commercial appliances		N/A
	Removing or fixing in wrong position of handles, knobs, etc. indicating position of switches or similar components not possible, if resulting in a hazard		N/A
	No use of sealing compound and similar materials, other than self-hardening resins, to prevent loosening		N/A
	Axial force of 15 N applied for 1 min to parts unlikely to be subjected to axial pull in normal use		N/A
	Axial force of 30 N applied for 1 min to parts likely to be subjected to axial pull in normal use		N/A
	Loosening of removed parts not resulting in a choking hazard, checked with small parts cylinder		N/A
22.13	Unlikely that handles, when gripped as in normal use, make the operator's hand touch parts having a temperature rise exceeding the value specified for handles which are held for short periods only		N/A
22.14	No ragged or sharp edges creating a hazard for the user in normal use or during user maintenance		P



EN 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
	No exposed pointed ends of self-tapping screws or other fasteners likely to be touched by the user in normal use or during user maintenance		P
22.15	Storage hooks and the like for flexible cords smooth and well rounded		N/A
22.16	Automatic cord reels cause no undue abrasion or damage to the sheath of the flexible cord, no breakage of conductor strands and no undue wear of contacts		N/A
	Cord reel tested with 6 000 operations, as specified		N/A
	Electric strength test of 16.3, voltage of 1 000 V applied		N/A
22.17	Spacers not removable from the outside by hand or by means of a screwdriver or a spanner		N/A
22.18	Current-carrying parts and other metal parts resistant to corrosion, unless		P
	made from stainless steel, plated steel or similar corrosion-resistant alloys		N/A
22.19	Driving belts not relied upon to provide the required level of insulation, unless		N/A
	constructed to prevent inappropriate replacement		N/A
22.20	Direct contact between live parts and thermal insulation effectively prevented, unless		N/A
	material used is non-corrosive, non-hygroscopic and non-combustible, or thermal insulation is glass-wool	No such material used	P
22.21	Wood, cotton, silk, ordinary paper and fibrous or hygroscopic material not used as insulation, unless		N/A
	impregnated		N/A
	Requirement not applicable to magnesium oxide and mineral ceramic fibres electrically insulating heating elements and insulating material where fibre interstices are filled with a suitable insulant		N/A
22.22	Appliances not containing asbestos		P
22.23	Oils containing polychlorinated biphenyl (PCB) not used		P



EN 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
22.24	Bare heating elements, except in class III appliances or class III constructions that do not contain live parts, adequately supported		N/A
	In case of rupture, the heating conductor is unlikely to come into contact with accessible metal parts		N/A
22.25	Sagging heating conductors cannot come into contact with accessible metal parts		N/A
	Requirement not applicable to class III appliances or class III constructions without live parts, appliances where a core effectively prevents sagging, or where supplementary insulation prevents contact		N/A
22.26	For class III constructions, the insulation between parts operating at safety extra-low voltage and other live parts complies with the requirements for double or reinforced insulation		N/A
22.27	Parts connected by protective impedance separated by double or reinforced insulation		P
22.28	Metal parts of class II appliances conductively connected to gas pipes or in contact with water separated from live parts by double or reinforced insulation		N/A
22.29	Class II appliances permanently connected to fixed wiring constructed so that the required degree of access to live parts is maintained after installation		N/A
22.30	Parts serving as supplementary or reinforced insulation fixed so that they cannot be removed without being seriously damaged, or		P
	constructed so that they cannot be replaced in an incorrect position and if omitted, the appliance is rendered inoperable or manifestly incomplete		P
22.31	Neither clearances nor creepage distances over supplementary and reinforced insulation reduced below values in clause 29 as a result of wear		P
	Neither clearances nor creepage distances between live parts and accessible parts reduced below values for supplementary insulation if wires, screws, etc. become loose	Output wire is soldered on PCB and fixed by glue additionally	P



EN 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
22.32	Supplementary and reinforced insulation constructed or protected against pollution so that clearances or creepage distances are not reduced below the values in clause 29		P
	Supplementary insulation of natural or synthetic rubber resistant to ageing, or arranged and dimensioned so that creepage distances are not reduced below values specified in 29.2		N/A
	Ceramic material not tightly sintered, similar materials or beads alone not used as supplementary or reinforced insulation		N/A
	Ceramic and similar porous material in which heating conductors are embedded is considered to be basic insulation, not reinforced insulation		N/A
	No visible cracks after oxygen bomb test at 70 °C for 96 h and 16 h at room temperature		N/A
22.33	Conductive liquids that are or may become accessible in normal use and conductive liquids that are in contact with unearthed accessible metal parts are not in direct contact with live parts, or		N/A
	unearthed metal parts separated from live parts by basic insulation only		N/A
	Electrodes not used for heating liquids		N/A
	For class II constructions, conductive liquids that are or may become accessible in normal use and conductive liquids that are in contact with unearthed accessible metal parts are not in direct contact with basic or reinforced insulation, unless		N/A
	the reinforced insulation consists of at least 3 layers		N/A
	For class II constructions, conductive liquids which are in contact with live parts are not in direct contact with reinforced insulation, unless		N/A
	the reinforced insulation consists of at least 3 layers		N/A
	An air layer not used as basic or supplementary insulation in a double insulation system if likely to be bridged by leaking liquid		N/A
22.34	Shafts of operating knobs, handles, levers etc. not live, unless		N/A



EN 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
	the shaft is not accessible when the part is removed		N/A
22.35	For other than class III constructions, handles, levers and knobs, held or actuated in normal use, not becoming live in the event of a failure of basic insulation		N/A
	Such parts being of metal, and their shafts or fixings are likely to become live in the event of a failure of basic insulation, are either adequately covered by insulation material or their accessible parts are separated from their shafts or fixings by supplementary insulation		N/A
	This requirement does not apply to handles, levers and knobs on stationary appliances and cordless appliances, other than those of electrical components, provided they are reliably connected to an earthing terminal or earthing contact, or separated from live parts by earthed metal		N/A
	Insulating material covering metal handles, levers and knobs withstands the electric strength test of 16.3 for supplementary insulation		N/A
22.36	For appliances other than class III appliances, handles continuously held in the hand in normal use so constructed that when gripped as in normal use, the operator's hand is not likely to touch metal parts, unless		N/A
	they are separated from live parts by double or reinforced insulation		N/A
22.37	Capacitors in class II appliances not connected to accessible metal parts and their casings, if of metal, separated from accessible metal parts by supplementary insulation, unless		P
	the capacitors comply with 22.42		P
22.38	Capacitors not connected between the contacts of a thermal cut-out		N/A
22.39	Lampholders used only for the connection of lamps		N/A
22.40	Motor-operated appliances and combined appliances intended to be moved while in operation, or having accessible moving parts, fitted with a switch to control the motor. The actuating member of the switch being easily visible and accessible		N/A



EN 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
	If the appliance cannot operate continuously, automatically or remotely without giving rise to a hazard, appliances for remote operation being fitted with a switch for stopping the operation. The actuating member of the switch being easily visible and accessible		N/A
22.41	No components, other than lamps, containing mercury		N/A
22.42	Protective impedance consisting of at least two separate components		N/A
	Values specified in 8.1.4 not exceeded if any one of the components are short-circuited or open-circuited		N/A
	Resistors checked by the test of 14.2 a) in IEC 60065:2014		N/A
	Capacitors checked by the tests for class Y capacitors in IEC 60384-14:2013 including IEC 60384-14:2013/AMD1:2016 for rated voltage of the appliance (V).....		N/A
22.43	Appliances adjustable for different voltages, accidental changing of the setting of the voltage unlikely to occur		N/A
22.44	Appliances not having an enclosure that is shaped or decorated like a toy, unless		P
	a toy is shaped like the appliance		P
22.45	When air is used as reinforced insulation, clearances not reduced below the values in 29.1.3 due to deformation of the enclosure, applying a force of 30 N to accessible surfaces		P
22.46	For programmable protective electronic circuits used to ensure compliance with the standard, the software contains measures to control the fault/error conditions in Table R.1		N/A
	These requirements are not applicable to software used for functional purpose or compliance with clause 11		N/A
	Compliance checked by evaluating the software in accordance with the relevant requirements of normative Annex R		N/A
	If the software is modified, the evaluation and relevant tests are repeated if the modification influences the results of the test involving protective electronic circuits		N/A



EN 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
22.47	Appliances connected to the water mains withstand the water pressure expected in normal use		N/A
	No leakage from any part, including any inlet water hose		N/A
22.48	Appliances connected to the water mains constructed to prevent back-siphonage of non-potable water		N/A
22.49	For remote operation, the duration of operation is to be set before the appliance can be started, unless		N/A
	the appliance switches off automatically or can operate continuously without hazard		N/A
22.50	Controls incorporated in the appliance take priority over controls actuated by remote operation		N/A
22.51	There is a control on the appliance manually adjusted to the setting for remote operation before the appliance can be operated in this mode		N/A
	There is a visual indication showing that the appliance is adjusted for remote operation		N/A
	These requirements are not necessary on appliances that can operate as follows, without giving rise to a hazard:		N/A
	- continuously, or		N/A
	- automatically, or		N/A
	remotely		N/A
22.52	Socket-outlets on appliances accessible to the user in accordance with the socket-outlet system used in the country in which the appliance is sold		N/A
22.53	Class II appliances and class III appliances that incorporate functionally earthed parts have at least double insulation or reinforced insulation between live parts and the functionally earthed parts		N/A
22.54	Button cells and batteries designated R1 not accessible without the aid of a tool, unless		N/A
	the cover of their compartment can only be opened after at least two independent movements have been applied simultaneously		N/A



EN 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
22.55	Devices operated to stop the intended function of the appliance, if any, are being distinguished from other manual devices by means of shape, size, surface texture, or position.....		N/A
	The requirement concerning position does not preclude use of a push on push off switch		N/A
	An indication when the device has been operated is given by:		N/A
	- tactile feedback from the actuator or from the appliance, or		N/A
	- reduction in heat output, or		N/A
	- audible and visible feedback		N/A
22.56	Detachable power supply part provided with the part of class III construction		N/A
22.57	The properties of non-metallic materials do not degrade from exposure to UV-C radiation, as specified in normative Annex T		N/A
	This requirement does not apply to glass, ceramics or similar materials		N/A
22.58	Appliances connected to the supply mains by an appliance inlet are provided with a cord set or a connector for attachment to a suitable flexible cord, except from		N/A
	- appliances complying with IEC 60320-3, or		N/A
	- single phase appliances having a rated current exceeding 16 A, connected to mains by an appliance inlet complying with IEC 60309-2, or		N/A
	- multi-phase appliances connected to mains by an appliance inlet complying with IEC 60309-2		N/A
22.59	Protective extra-low voltage circuits separated by at least supplementary insulation from circuits operating at safety extra-low voltage		N/A
22.60	Functional earthing terminals and functional earthing contacts not connected to the neutral terminal		N/A
22.61	Appliance outlets complying with the standard sheets in IEC 60320-3 accessible to the user and socket outlets accessible to the user are single phase, if:		N/A
	- they are incorporated in appliances connected to the supply mains, and		N/A
	- they operate at rated voltage		N/A



EN 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Current rating not exceeding 16 A (A).....		N/A
	Appliance outlets accessible to the user, other than those supplying accessories, and socket-outlets accessible to the user are protected by one of the following:		N/A
	- a circuit breaker for equipment complying with IEC 60934, or		N/A
	- a non-user replaceable fuse-link		N/A
	Current rating of protective device not exceeding current rating of the appliance outlet or socket-outlet (A).....		N/A
	Protective device placed behind a non-detachable cover		N/A
	Current rating of appliance outlets and socket-outlets marked with the outlet load in watts, obtained from the market outlet load divided by the rated voltage (A).....		N/A
22.62	Remote communication through public networks does not impair compliance with this standard		N/A
	The requirement does only apply to remote communication where the download of software or the transmission of data:		N/A
	a) includes measures according to normative Annex R necessary for compliance with 22.46, or		N/A
	Includes means necessary for compliance with Clauses 8 to 32		N/A
	b) only affects the software part that is not covered by a), but where compliance might be impaired due to improper separation of partitioning from the software or data in a)		N/A
	The requirement does not apply to appliances:		N/A
	- where all measures to comply with this standards are independent of software,		N/A
	- using remote communication through public networks for the send-only transmission of data, or		N/A
	- that only provide event driven messages or push remote monitoring		N/A
	Compliance checked by inspection of the product and the technical documentation, and by the requirements and tests in normative Annex U		N/A
23	INTERNAL WIRING		P



EN 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
23.1	Wireways smooth and free from sharp edges		P
	Wires protected against contact with burrs, cooling fins, etc.		P
	Wire holes in metal well-rounded or provided with bushings		N/A
	Wiring effectively prevented from coming into contact with moving parts		N/A
23.2	Beads etc. on live wires cannot change their position, and are not resting on sharp edges		N/A
	Beads inside flexible metal conduits contained within an insulating sleeve		N/A
23.3	Electrical connections and internal conductors movable relatively to each other not exposed to undue stress		N/A
	Flexible metallic tubes not causing damage to insulation of conductors		N/A
	Open-coil springs not used		P
	Adequate insulating lining provided inside a coiled spring, the turns of which touch one another		N/A
	Appliance supplied at rated voltage.....		N/A
	No damage after 10 000 flexings for conductors flexed during normal use, or		N/A
	100 flexings for conductors flexed during user maintenance		N/A
	Electric strength test of 16.3, 1 000 V between live parts and accessible metal parts		N/A
	Not more than 10 % of the strands of any conductor broken, and		N/A
	not more than 30 % for wiring supplying circuits that consume no more than 15 W		N/A
23.4	Bare internal wiring sufficiently rigid and fixed		P
23.5	No use of a single layer of internal wiring insulation to provide reinforced insulation		N/A
	For class II construction, the sheath of a cord complying with IEC 60227 or IEC 60245 or IEC 62821 may provide supplementary insulation		N/A
	Insulation of single layer internal wiring subjected to the supply mains voltage withstands the electrical stress likely to occur in normal use, if:		N/A



EN 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
	- insulation of single layer internal wiring electrically equivalent to the basic insulation of cords complying with IEC 60227 or IEC 60245 or IEC 62821, or		N/A
	- no breakdown when a voltage of 2 000 V is applied for 15 min between the conductor and metal foil wrapped around the insulation		N/A
23.6	Sleeving used as supplementary insulation on internal wiring retained in position by clamping at both ends, or		N/A
	be such that it can only be removed by breaking or cutting		N/A
23.7	The colour combination green/yellow only used for earthing conductors		N/A
23.8	Aluminium wires not used for internal wiring		P
	The requirement does not apply to windings		P
23.9	Stranded conductors not consolidated by soldering where they are subjected to contact pressure, unless		P
	the contact pressure is provided by spring terminals		P
	The requirement does not apply to the soldered tip of a stranded conductor		N/A
23.10	The insulation and sheath of internal wiring, incorporated in external hoses for the connection of an appliance to the water mains, at least equivalent to that of light polyvinyl chloride sheathed flexible cord (60227 IEC 52), checked as specified		N/A
24	COMPONENTS		P
24.1	Components comply with safety requirements in relevant IEC standards		P
	List of components.....	(see appended table)	P
	Motors not required to comply with IEC 60034-1, they are tested as part of the appliance		N/A
	Relays tested as part of the appliance, or		N/A
	alternatively, acc. to IEC 60730-1:2013 including IEC 60730-1:2013/AMD1:2015, and meeting the additional requirements in EN 60335-1		N/A
	The requirements of Clause 29 apply between live parts of components and accessible parts of the appliance		P



EN 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Components can comply with the requirements for clearances and creepage distances for functional insulation in the relevant component standard		P
	30.2 of this standard applies to parts of non-metallic material in components including parts of non-metallic material supporting current-carrying connections		P
	Components that have not been previously tested to comply with the IEC standard for the relevant component are tested according to the requirements of 30.2		P
	Components that have been previously tested to comply with the resistance to fire requirements in the IEC standard for the relevant component need not be retested provided that the specified conditions are met		P
	If these conditions are not satisfied, the component is tested as part of the appliance		P
	Power electronic converter circuits not required to comply with IEC 62477-1, they are tested as part of the appliance		N/A
	If components have not been tested and found to comply with relevant IEC standard for the number of cycles specified, they are tested in accordance with 24.1.1 to 24.1.9		P
	For components mentioned in 24.1.1 to 24.1.9 no additional tests specified in the relevant component standard are necessary other than those specified in 24.1.1 to 24.1.9		P
	Components not tested and found to comply with relevant IEC standard and components not marked or not used according to their marking, tested under the conditions occurring in the appliance		P
	Lampholders and starterholders not being previously tested and found to comply with the relevant IEC standard, tested as a part of the appliance and additionally complying with the gauging and interchangeability requirements of the relevant IEC standard under the conditions occurring in the appliance		N/A



EN 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
	No additional tests specified for nationally standardized plugs such as those detailed in IEC TR 60083 or connectors or plug connectors complying with the standard sheets of IEC 60320-3 or connectors complying with the standard sheets of IEC 60309-2		N/A
24.1.1	Capacitors likely to be permanently subjected to the supply voltage and used for radio interference suppression or for voltage dividing comply with IEC 60384-14:2013 including IEC 60384-14:2013/AMD1:2016		P
	If the capacitors have to be tested, they are tested according to normative Annex F		N/A
24.1.2	Transformers in associated switch mode power supplies comply with Annex BB of IEC 61558-2-16:2009 including IEC 61558-2-16:2009/AMD1:2013		P
	Safety isolating transformers comply with IEC 61558-2-6:2009		N/A
	If they have to be tested, they are tested according to normative Annex G		P
24.1.3	Switches comply with IEC 61058-1:2016, number of cycles of operation being at least 10 000, unless		N/A
	the appliance meets the requirements of this standard when they are rendered inoperative, then the number of cycles need not to be declared for 7.4 of IEC 61058-1:2016		N/A
	If they have to be tested, they are tested according to normative Annex H		N/A
	If the switch operates a relay or contactor, the complete switching system is subjected to the test		N/A
	If the switch only operates a motor starting relay complying with IEC 60730-2-10 with the number of cycles of a least 10 000 as specified, the complete switching system need not be tested		N/A
24.1.4	Automatic controls comply with IEC 60730-1:2013 including IEC 60730-1:2013/AMD1:2015 together with the relevant part 2. The number of cycles of operation being at least:		N/A
	- thermostats:	10 000	N/A
	- temperature limiters:	1 000	N/A



EN 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
	- self-resetting thermal cut-outs:	300	N/A
	- voltage maintained non-self-resetting thermal cut-outs:	1 000	N/A
	- other non-self-resetting thermal cut-outs:	30	N/A
	- timers:	3 000	N/A
	- energy regulators:	10 000	N/A
	The number of cycles for controls operating during clause 11 need not be declared, if the appliance meets the requirements of this standard when they are short-circuited or rendered inoperative		N/A
	If automatic controls have to be tested, additionally tested in accordance with 11.3.5 to 11.3.8 and Clause 17 of IEC 60730-1:2013 including IEC 60730-1:2013/AMD1:2015 as type 1 controls, tests of Clauses 12, 13 and 14 not carried out before the test of Clause 17		N/A
	Thermal motor protectors are tested in combination with their motor under the conditions specified in normative Annex D		N/A
	For water valves containing live parts and that are incorporated in external hoses for connection of an appliance to the water mains, degree of protection declared for 6.5.2 of IEC 60730-2-8:2018 is IPX7		N/A
	Thermal cut-outs of the capillary type comply with the requirements for type 2.K controls in IEC 60730-2-9:2015 including 60730-2-9:2015/AMD1:2018		N/A
24.1.5	Appliance couplers comply with IEC 60320-1		P
	However, for appliances classified higher than IPX0, the appliance couplers comply with IEC 60320-2-3	IPX0	P
24.1.6	Small lampholders similar to E10 lampholders comply with IEC 60238, the requirements for E10 lampholders being applicable		N/A
24.1.7	For remote operation of the appliance via a telecommunication network, the relevant standard for the telecommunication interface circuitry in the appliance is IEC 62151		N/A
24.1.8	Thermal links comply with IEC 60691		N/A
24.1.9	Contactors and relays, other than motor starting relays, tested as part of the appliance		N/A



EN 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
	They are also tested in accordance with Clause 17 of IEC 60730-1:2013 including IEC 60730-1:2013/AMD:2015, the number of cycles of operations in 24.1.4 selected according to the contactor or relay function in the appliance.....		N/A
24.1.10	Lamps and lamp systems that have not been previously tested and found to comply with the exempt group classification of IEC 62471:2006 GLS regarding E _S and E _{UVA} :		N/A
	- tested as part of the appliance		N/A
	- comply with the requirements of Clause 32 under the conditions occurring in the appliance		N/A
	Unless otherwise specified, the following components are considered to comply with the specified GLS classification:		N/A
	- visible light indicators		N/A
	- infrared sources used for signalling or communication		N/A
	- seven-segment indicators		N/A
	- liquid crystal displays		N/A
	- organic LED displays (OLED)		N/A
	- plasma displays		N/A
24.1.11	Cord sets required to be provided with the appliance comply with IEC 60799		N/A
	Cord sets with cords complying to IEC 62821-3 allowed		N/A
24.2	Appliances not fitted with:		N/A
	- switches, automatic controls, power supplies and the like in flexible cords		N/A
	- devices causing the protective device in the fixed wiring to operate in the event of a fault in the appliance		N/A
	- thermal cut-outs that can be reset by soldering, unless		N/A
	the solder has a melting point of at least 230 °C		N/A
24.3	Switches intended for all-pole disconnection of stationary appliances are directly connected to the supply terminals and have a contact separation in all poles, providing full disconnection under overvoltage category III conditions		N/A



EN 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
24.4	Plugs and socket-outlets for extra-low voltage circuits and heating elements, not interchangeable with plugs and socket-outlets listed in IEC TR 60083 or IEC 60906-1 or with connectors, appliance inlets, plug connectors and appliance outlets complying with the standard sheets of IEC 60320-3		N/A
24.5	Capacitors in auxiliary windings of motors marked with their voltage rating and their rated capacitance, and used accordingly		N/A
	Voltage across capacitors in series with a motor winding does not exceed 1,1 times its voltage rating, when the appliance is supplied at 1,1 times rated voltage under minimum load (V).....		N/A
24.6	Working voltage of motors connected to the supply mains and having basic insulation that is inadequate for the rated voltage of the appliance, not exceeding 42 V (V).....		N/A
	In addition, the motors comply with the requirements of normative Annex I		N/A
24.7	Detachable hose-sets for connection of appliances to the water mains comply with IEC 61770		N/A
	They are supplied with the appliance		N/A
	Appliances intended to be permanently connected to the water mains not connected by a detachable hose-set		N/A
24.8	Motor running capacitors in appliances for which 30.2.3 is applicable and that are permanently connected in series with a motor winding, not causing a hazard in event of a failure		N/A
	One or more of the following conditions are met:		N/A
	- the capacitors are of class S2 or S3 according to IEC 60252-1:2010 including IEC 60252-1:2010/AMD1:2013		N/A
	- the capacitors are housed within a metallic or ceramic enclosure		N/A
	- the distance of separation of the outer surface to adjacent non-metallic parts exceeds 50 mm		N/A
	- adjacent non-metallic parts within 50 mm withstand the needle-flame test of normative Annex E		N/A



EN 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
	- adjacent non-metallic parts within 50 mm classified as at least V-1 according to IEC 60695-11-10		N/A
	For capacitors complying with IEC 60252-1:2010 including IEC 60252-1:2010/AMD1:2013, damp heat test for 5.14 of that standard with severity parameters as specified		N/A
25	SUPPLY CONNECTION AND EXTERNAL FLEXIBLE CORDS		P
25.1	Appliance not intended for permanent connection to fixed wiring, means for connection to the supply:		P
	- supply cord fitted with a plug, the current rating and voltage rating of the plug being not less than the corresponding ratings of its associated appliance		N/A
	- an appliance inlet having at least the same degree of protection against moisture as required for the appliance, or		N/A
	- pins for insertion into socket-outlets		P
25.2	Appliance not provided with more than one means of connection to the supply mains		P
	Stationary appliance for multiple supply may be provided with more than one means of connection, provided electric strength test of 1 250 V for 1 min between each means of connection causes no breakdown		N/A
25.3	Appliance intended to be permanently connected to fixed wiring provided with one of the following means for connection to the supply mains		N/A
	- cord anchorage and a set of terminals allowing the connection of a flexible cord		N/A
	- a fitted supply cord		N/A
	a set of supply leads accommodated in a suitable compartment		N/A
	- a set of terminals for the connection of cables of fixed wiring, cross-sectional areas specified in 26.6, and the appliance allows the connection of the supply conductors after the appliance has been fixed to its support		N/A
	- a set of terminals and cable entries, conduit entries, knock-outs or glands, allowing connection of appropriate types of cable or conduit, and the appliance allows the connection of the supply conductors after the appliance has been fixed to its support		N/A



EN 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
25.4	Cable and conduit entries, rated current of appliance not exceeding 16 A, dimension according to Table 10 (mm) :		N/A
	Introduction of conduit or cable does not reduce clearances or creepage distances below values specified in clause 29		N/A
25.5	Method for assembling the supply cord to the appliance:		N/A
	- type X attachment		N/A
	- type Y attachment		N/A
	- type Z attachment, if allowed in relevant part 2		N/A
	Type X attachment, other than those with a specially prepared cord, not used for flat twin tinsel cords		N/A
	For multi-phase appliances supplied with a supply cord and that are intended to be permanently connected to fixed wiring, the supply cord is assembled to the appliance by type Y attachment		N/A
25.6	Plugs fitted with only one flexible cord		N/A
25.7	Supply cords, other than for class III appliances, being one of the following types:		N/A
	- rubber sheathed (at least 60245 IEC 53), unless		N/A
	The appliance is intended to be used outdoors or is liable to being exposed to ultraviolet radiation		N/A
	- polychloroprene sheathed (at least 60245 IEC 57),		N/A
	supply cords being allowed to be connected to appliances intended for use in low temperature		N/A
	- polyvinyl chloride sheathed. Not used if they are likely to touch metal parts having a temperature rise exceeding 75 K during the test of clause 11		N/A
	•light polyvinyl chloride sheathed cord (60227 IEC 57)		N/A
	•ordinary polyvinyl chloride sheathed cord (60227 IEC 57)		N/A
	- heat resistant polyvinyl chloride sheathed. Not used for type X attachment other than specially prepared cords		N/A
	•heat-resistant light polyvinyl chloride sheathed cord (60227 IEC 57)		N/A
	•heat-resistant polyvinyl chloride sheathed cord (60227 IEC 57)		N/A
	- halogen-free, low smoke, thermoplastic insulated and sheathed		N/A



EN 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
	• light duty halogen-free low smoke flexible cable (62821 IEC 101) for circular cable and (62821 IEC 101f) for flat cable		N/A
	• Ordinary duty halogen-free low smoke flexible cable (62821 IEC 102) for circular cable and (62821 IEC 102f) for flat cable		N/A
	Supply cords for class III appliances adequately insulated		N/A
	Test with 500 V for 2 min for supply cords of class III appliances that contain live parts		N/A
25.8	Nominal cross-sectional area of supply cords not less than Table 11; rated current (A); cross-sectional area (mm ²).....		N/A
25.9	Supply cords for class III appliances adequately insulated		N/A
25.10	Supply cord of class I appliances have a green/yellow core for earthing		N/A
	In multi-phase appliances, the colour of the neutral conductor of the supply cord is blue		N/A
	Where additional neutral conductors are provided in the supply cord:		N/A
	- other colours may be used for these additional neutral conductors;		N/A
	- all of the neutral conductors and line conductors are identified by marking using the alphanumeric notation specified in IEC 60445		N/A
	- the supply cord is fitted to the appliance		N/A
25.11	Conductors of supply cords not consolidated by soldering where they are subject to contact pressure, unless		N/A
	the contact pressure is provided by spring terminals		N/A
	The requirement does not apply to the soldered tip of a stranded conductor		N/A
25.12	Insulation of the supply cord not damaged when moulding the cord to part of the enclosure		N/A
25.13	Inlet openings so constructed as to prevent damage to the supply cord		N/A
	If it is not evident that the supply cord can be introduced without risk of damage, a non-detachable lining or bushing complying with 29.3 for supplementary insulation provided		N/A



EN 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
	If unsheathed supply cord, a similar additional bushing or lining is required, unless the appliance is:		N/A
	- a class 0 appliance, or		
	- a class III appliance not containing live parts		N/A
25.14	Supply cords moved while in operation adequately protected against excessive flexing, unless		N/A
	appliance is fitted with automatic cord reels complying with the requirement and test of 22.16		N/A
	Flexing test, as described:		N/A
	Conductors supplied at rated voltage (V).....		N/A
	Conductors loaded with rated current (A):.....		N/A
	- applied force (N).....		N/A
	- number of flexings :		N/A
	The test does not result in		N/A
	- short-circuit between the conductors, such that the current exceeds a value of twice the rated current		N/A
	- breakage of more than 10 % of the strands of any conductor		N/A
	- separation of the conductor from its terminal		N/A
	- loosening of any cord guard		N/A
	- broken strands piercing the insulation and becoming accessible		N/A
25.15	For appliances with supply cord and appliances to be permanently connected to fixed wiring by a flexible cord, conductors of the supply cord relieved from strain, twisting and abrasion by use of cord anchorage		N/A
	he cord cannot be pushed into the appliance to such an extent that the cord or internal parts of the appliance can be damaged		N/A
	Pull and torque test of supply cord:		N/A
	- fixed appliances: pull 100 N; torque (not on automatic cord reel) (Nm).....		N/A
	- other appliances: values shown in Table 12: mass (kg); pull (N); torque (not on automatic cord reel) (Nm).....		N/A
	Cord not damaged and max. 2 mm displacement of the cord		N/A



EN 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
25.16	Cord anchorages for type X attachments constructed and located so that:		N/A
	- replacement of the cord is easily possible		N/A
	- it is clear how the relief from strain and the prevention of twisting are obtained		N/A
	- they are suitable for different types of supply cord		N/A
	- cord cannot touch the clamping screws of cord anchorage if these screws are accessible, unless		N/A
	they are separated from accessible metal parts by supplementary insulation		N/A
	- the cord is not clamped by a metal screw which bears directly on the cord		N/A
	- at least one part of the cord anchorage securely fixed to the appliance, unless		N/A
	it is part of a specially prepared cord		N/A
	Not applicable if the cord anchorage comprises one or more clamping members subjected to pressure by means of nuts engaging with securely attached studs, even if removal possible, or if		N/A
	one clamping member is fixed to the appliance or obviously shaped insulating material is used as the surface of the appliance		N/A
	- screws which have to be operated when replacing the cord do not fix any other component, unless		N/A
	the appliance becomes inoperative or incomplete or the parts cannot be removed without a tool		N/A
	- if labyrinths can be bypassed, the test of 25.15 is nevertheless withstood		N/A
	- for class 0, 0I and I appliances, they are of insulating material or are provided with an insulating lining, unless		N/A
	failure of the insulation of the cord does not make accessible metal parts live		N/A
	- for class II appliances, they are of insulating material, or		N/A
	if of metal, they are insulated from accessible metal parts by supplementary insulation		N/A
	Compliance checked by inspection and by the test of 25.15 under the following conditions:		N/A



EN 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
	- carried out with lightest permissible type of cord of the smallest cross-sectional area specified in Table 13, then with next heavier type cord having the largest cross-sectional area specified, however		N/A
	if the appliance is fitted with a specially prepared cord, test carried out with this cord		N/A
	- conductors placed in the terminals and any terminal screws tightened to prevent the conductors from easily changing their position		N/A
	- clamping screws of the cord anchorage tightened with two-thirds of the torque specified in 28.1		N/A
	- screws of insulating material bearing directly on the cord fastened with two-thirds of the torque specified in column I of Table 14, the length of the slot in the screw head being taken as the nominal diameter of the screw		N/A
	After the test, the conductors have not moved by more than 1 mm in the terminals		N/A
25.17	Adequate cord anchorages for type Y and Z attachment, test with the cord supplied with the appliance		N/A
	For Type Z attachment compliance checked by the test of 25.15 with the cord supplied with the appliance		N/A
	For Type Y attachment compliance checked by the test of 25.15 with the cord supplied with the appliance and designated alternative types (if any)		N/A
25.18	Cord anchorages only accessible with the aid of a tool, or		N/A
	constructed so that the cord can only be fitted with the aid of a tool		N/A
25.19	Type X attachment, glands not used as cord anchorage in portable appliances		N/A
	Tying the cord into a knot or tying the cord with string not used		N/A
	The conductors of the supply cord for type Y and Z attachment insulated from accessible metal parts		N/A
25.21	Space for supply cord for type X attachment or for connection of fixed wiring constructed:		N/A



EN 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
	- to permit checking of conductors with respect to correct positioning and connection before fitting any cover		N/A
	- so there is no risk of damage to the conductors or their insulation when fitting the cover		N/A
	- for portable appliances, so that the uninsulated end of a conductor, if it becomes free from the terminal, prevented from contact with accessible metal parts		N/A
	2 N test to the conductor for portable appliances; no contact with accessible metal parts		N/A
25.22	Appliance inlets:		N/A
	- live parts not accessible during insertion or removal		N/A
	Requirement not applicable to appliance inlets complying with IEC 60320-1		N/A
	- connector can be inserted without difficulty		N/A
	- the appliance is not supported by the connector		N/A
	- not for cold conditions if temp. rise of external metal parts exceeds 75 K during clause 11, unless		N/A
	the flexible cord of the cord set is unlikely to touch such metal parts		N/A
25.23	Interconnection cords comply with the requirements for the supply cord, except that:		N/A
	- the cross-sectional area of the conductors is determined based on the maximum current during clause 10, and		N/A
	- the thickness of the insulation may be reduced		N/A
	for class I or class II appliance with class III construction, the cross-sectional areas of the conductors need not comply with 25.8 if specified conditions are met		N/A
	If necessary, electric strength test of 16.3		N/A
25.24	Interconnection cords not detachable without the aid of a tool if compliance with this standard is impaired when they are disconnected		N/A



EN 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
25.25	Dimensions of pins that are inserted into socket-outlets compatible with the dimensions of the relevant socket-outlet		N/A
	Dimensions of pins and engagement face in accordance with the dimensions of the relevant plug in IEC TR 60083		N/A
26	TERMINALS FOR EXTERNAL CONDUCTORS		P
26.1	Appliances provided with terminals or equally effective devices, such as male tabs of flat quick-connect terminations (IEC 61210), screw type terminals (IEC 60998-2-1), screwless terminals (IEC 60998-2-2) and clamping units (IEC 60999-1:1999), for connection of external conductors		P
	Terminals only accessible after removal of a non-detachable cover, except		N/A
	for class III appliances that do not contain live parts		N/A
	Earthing terminals and functional earthing terminals may be accessible if a tool is required to make the connections and means are provided to clamp the wire independently from its connection		N/A
26.2	Appliances with type X attachment and appliances for the connection of cables of fixed wiring provided with terminals in which connections are made by means of screws, nuts or similar devices, unless		N/A
	the connections are soldered		N/A
	Screws and nuts not used to fix any other component, except		N/A
	internal conductors, if so arranged that they are unlikely to be displaced when fitting the supply conductors		N/A
	If soldered connections used, the conductor so positioned or fixed that reliance is not placed on soldering alone, unless		N/A
	barriers provided so that neither clearances nor creepage distances between live parts and other metal parts reduced below the values for supplementary insulation if the conductor becomes free at the soldered joint		N/A



EN 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
26.3	Terminals for type X attachment and for connection of cables of fixed wiring constructed so that the conductor is clamped between metal surfaces with sufficient contact pressure but without damaging the conductor		N/A
	Terminals fixed so that when the clamping means is tightened or loosened:		N/A
	- the terminal does not become loose		N/A
	- internal wiring is not subjected to stress		N/A
	- neither clearances nor creepage distances are reduced below the values in clause 29		N/A
	Compliance checked by inspection and by the test of subclause 9.6 of IEC 60999-1:1999, the torque applied being equal to two-thirds of the torque specified (Nm).....		N/A
	No deep or sharp indentations of the conductors		N/A
26.4	Terminals for type X attachment, except those having a specially prepared cord and those for the connection of cables of fixed wiring, no special preparation of conductors such as by soldering, use of cable lugs, eyelets or similar,		N/A
	Reshaping of the conductor before its introduction into the terminal or twisting a stranded conductor to consolidate the end is not considered special preparation		N/A
	Terminals constructed or placed so that conductors prevented from slipping out when clamping screws or nuts are tightened		N/A
26.5	Terminals for type X attachment so located or shielded that if a wire of a stranded conductor escapes, no risk of accidental connection to other parts that result in a hazard		N/A
	Stranded conductor test, 8 mm insulation removed		N/A
	No contact between live parts and accessible metal parts and,		N/A
	for class II constructions, between live parts and metal parts separated from accessible metal parts by supplementary insulation only		N/A
26.6	Terminals for type X attachment and for connection of cables of fixed wiring suitable for connection of conductors with cross-sectional area according to Table 13; rated current (A); nominal cross-sectional area (mm ²).....		N/A



EN 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
	If a specially prepared cord is used, terminals need only be suitable for that cord		N/A
26.7	Terminals for type X attachment, except in class III appliances not containing live parts, accessible after removal of a cover or part of the enclosure		N/A
26.8	Terminals for the connection of fixed wiring, including the earthing terminal, located close to each other		N/A
26.9	Terminals of the pillar type constructed and located as specified		N/A
26.10	Terminals with screw clamping and screwless terminals not used for flat twin tinsel cords, unless		N/A
	ends of conductors fitted with means suitable for screw terminals		N/A
	Pull test of 5 N to the connection		N/A
26.11	For type Y and Z attachment, soldered, welded, crimped or similar connections may be used		P
	For class II appliances, the conductor so positioned or fixed that reliance is not placed on soldering, welding or crimping alone		P
	If soldering, welding or crimping alone used, barriers provided so that clearances and creepage distances between live parts and other metal parts are not reduced below the values for supplementary insulation if the conductor becomes free		N/A
27	PROVISION FOR EARTHING		N/A
27.1	Accessible metal parts, including metal parts behind a decorative cover that does not withstand the test of 21.1, of class 0I and I appliances permanently and reliably connected to an earthing terminal or earthing contact of the appliance inlet		N/A
	Earthing terminals and earthing contacts not connected to the neutral terminal		N/A
	Class 0, II and III appliances have no provision for protective earthing		N/A
	Safety extra-low voltage circuits not earthed, unless		N/A
	protective extra-low voltage circuits		N/A



EN 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
27.2	Clamping means of earthing terminals adequately secured against accidental loosening		N/A
	Terminals for the connection of external equipotential bonding conductors allow connection of conductors of 2,5 mm ² to 6 mm ² , and		N/A
	- do not provide earthing continuity between different parts of the appliance, and		N/A
	- conductors cannot be loosened without the aid of a tool		N/A
27.3	For a detachable part having an earth connection and being plugged into another part of the appliance, the earth connection is made before and separated after current-carrying connections when removing the part		N/A
	For appliances with supply cords, current-carrying conductors become taut before earthing conductor, if the cord slips out of the cord anchorage		N/A
27.4	No risk of corrosion resulting from contact between parts of the earthing terminal and the copper of the earthing conductor or other metal		N/A
	Parts providing earthing continuity, other than parts of a metal frame or enclosure, have adequate resistance to corrosion		N/A
	If of steel, these parts provided with an electroplated coating, thickness of at least 5 mm		N/A
	Adequate protection against rusting of parts of coated or uncoated steel, only intended to provide or transmit contact pressure		N/A
	In the body of the earthing terminal is a part of a frame or enclosure of aluminium or aluminium alloys, precautions taken to avoid risk of corrosion		N/A
	In case of doubt, thickness of coating measured as described in ISO 2178 or in ISO 1463		N/A
27.5	Low resistance of connection between earthing terminal and earthed metal parts		N/A



EN 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
	This requirement does not apply to connections providing earthing continuity in the protective extra-low voltage circuit, provided the clearances of basic insulation are based on the rated voltage of the appliance(V)..		N/A
	Resistance not exceeding 0,1 W at the specified low-resistance test (W).....		N/A
	The printed conductors of printed circuit boards not used to provide earthing continuity in hand-held appliances		N/A
	They may be used to provide earthing continuity in other appliances if at least two tracks are used with independent soldering points and the appliance complies with 27.5 for each circuit		N/A
28	SCREWS AND CONNECTIONS		P
28.1	Fixings, electrical connections and connections providing earthing continuity withstand mechanical stresses		P
	Screws not of soft metal liable to creep, such as zinc or aluminium		P
	Diameter of screws of insulating material min. 3 mm		P
	Screws of insulating material not used for any electrical connections or connections providing earthing continuity		N/A
	Screws used for electrical connections or connections providing earthing continuity screwed into metal		N/A
	Screws not of insulating material if their replacement by a metal screw can impair supplementary or reinforced insulation		N/A
	For type X attachment, screws to be removed for replacement of supply cord or for user maintenance, not of insulating material if their replacement by a metal screw impairs basic insulation		N/A
	For screws and nuts; torque-test as specified in Table 14.....	(See appended table)	P
28.2	Electrical connections and connections providing earthing continuity constructed so that contact pressure is not transmitted through non-ceramic insulating material liable to shrink or distort, unless		N/A



EN 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
	there is resiliency in the metallic parts to compensate for shrinkage or distortion of the insulating material		N/A
	This requirement does not apply to electrical connections in circuits of appliances for which:		N/A
	- 30.2.2 is applicable and that carry a current not exceeding 0,5 A		N/A
	- 30.2.3 is applicable and that carry a current not exceeding 0,2 A		N/A
28.3	Space-threaded (sheet metal) screws only used for electrical connections if they clamp the parts together		N/A
	Thread-cutting (self-tapping) screws and thread rolling screws only used for electrical connections if they generate a full form standard machine screw thread		N/A
	Thread-cutting (self-tapping) screws not used if they are likely to be operated by the user or installer		N/A
	Thread-cutting, thread rolling and space threaded screws may be used in connections providing earthing continuity provided it is not necessary to disturb the connection:		N/A
	- in normal use,		N/A
	- during user maintenance,		N/A
	- when replacing a supply cord having a type X attachment, or		N/A
	- during installation		N/A
	At least two screws being used for each connection providing earthing continuity, unless		N/A
	the screw forms a thread having a length of at least half the diameter of the screw		N/A
28.4	Screws and nuts that make mechanical connection secured against loosening by means such as spring washer, lock washers and crown type locks, if they also make electrical connections or connections providing earthing continuity		N/A
	For screw connections not subjected to torsion, sealing compound that softens on heating allowed to be used to provide security against loosening		N/A



EN 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
	This requirement does not apply to screws in the earthing circuit if at least two screws are used, or		N/A
	if an alternative earthing circuit is provided		N/A
	Rivets for electrical connections or connections providing earthing continuity secured against loosening if the connections are subjected to torsion		N/A
	If connections subjected to torsion, a rivet having a non-circular shank or an appropriate notch allowed to be used to secure against loosening		N/A
29	CLEARANCES, CREEPAGE DISTANCES AND SOLID INSULATION		P
	Clearances, creepage distances and solid insulation withstand electrical stress		P
	For coatings used on printed circuits boards to protect the microenvironment (type 1) or to provide basic insulation (type 2), normative Annex J applies.....		N/A
	The microenvironment is pollution degree 1 under type 1 protection		N/A
	For type 2 protection, the spacing between the conductors before the protection is applied is not less than the values specified in Table 1 of IEC 60664-3:2016		N/A
	These values apply to functional, basic, supplementary and reinforced insulation.....		N/A
29.1	Clearances not less than the values specified in Table 16, taking into account the rated impulse voltage for the overvoltage categories of Table 15, unless.....	(See appended table)	P
	for basic insulation and functional insulation, they comply with the impulse voltage test of clause 14		P
	For appliances intended for use at altitudes exceeding 2 000 m, the clearances in Table 16 are increased according to the altitude correction factor in Table A.2 of IEC 60664-1:2007		P
	However, the impulse voltage test is not applicable if the construction is such that the distances could be affected by any of the following:		N/A
	- distortion		N/A
	- movement of parts		N/A
	- assembly of parts		N/A



EN 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
	- wear of basic insulation		N/A
	- wear of functional insulation		N/A
	In this case, the clearances for rated impulse voltages of 1 500 V and above specified in Table 16 are increased by 0,5 mm		N/A
	Impulse voltage test is not applicable:		N/A
	- when the microenvironment is pollution degree 3, or		N/A
	- for basic insulation of class 0 and class 0I appliances, or		N/A
	- to appliances intended for use at altitudes exceeding 2 000 m		N/A
	Appliances are in overvoltage category II		N/A
	A force of 2 N is applied to bare conductors, other than heating elements		N/A
	A force of 30 N is applied to accessible surfaces		N/A
29.1.1	Clearances of basic insulation withstand the overvoltages, taking into account the rated impulse voltage		N/A
	The values of Table 16 or the impulse voltage test of clause 14 are applicable.....	(See appended table)	N/A
	Clearance at the terminals of tubular sheathed heating elements may be reduced to 1,0 mm, if the microenvironment is pollution degree 1		N/A
	Lacquered conductors of windings considered to be bare conductors		N/A
29.1.2	Clearances of supplementary insulation not less than those spec. for basic insulation in Table 16.....	(See appended table)	N/A
29.1.3	Clearances of reinforced insulation not less than those specified in Table 16, using the next higher step for rated impulse voltage.....	(See appended table)	N/A
	For double insulation, with no intermediate conductive part between basic and supplementary insulation, clearances are measured between live parts and the accessible surface, and the insulation system is treated as reinforced insulation		N/A
29.1.4	Clearances for functional insulation are the largest values determined from:		N/A
	- Table 16 based on the rated impulse voltage...	(See appended table)	N/A



EN 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
	- Table F.7a in IEC 60664-1:2007, frequency not exceeding 30 kHz		N/A
	- clause 4 of IEC 60664-4:2005, frequency exceeding 30 kHz		N/A
	If values of Table 16 are largest, the impulse voltage test of clause 14 may be applied instead, unless		N/A
	the microenvironment is pollution degree 3, or		N/A
	the distances can be affected by wear, distortion, movement of the parts or during assembly		N/A
	However, clearances are not specified if the appliance complies with clause 19 with the functional insulation short-circuited		N/A
	Lacquered conductors of windings considered to be bare conductors		N/A
	However, clearances at crossover points are not measured		N/A
	Clearance between surfaces of PTC heating elements may be reduced to 1 mm		N/A
29.1.5	Appliances having higher working voltages than rated voltage, clearances for basic insulation are the largest values determined from: Working voltage >.....V		P
	- Table 16 based on the rated impulse voltage..		P
	- Table F.7a in IEC 60664-1:2007, frequency not exceeding 30 kHz		P
	- clause 4 of IEC 60664-4:2005, frequency exceeding 30 kHz		P
	If clearances for basic insulation are selected from Table F.7a of IEC 60664-1:2007 or Clause 4 of IEC 60664-4:2005, the clearances of supplementary insulation are not less than those specified for basic insulation		P
	If clearances for basic insulation are selected from Table F.7a of IEC 60664-1:2007, the clearances of reinforced insulation dimensioned as specified in Table F.7a are to withstand 160 % of the withstand voltage required for basic insulation		N/A
	If clearances for basic insulation are selected from Clause 4 of IEC 60664-4:2005, the clearances of reinforced insulation are twice the value required for basic insulation		P



EN 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
	If the secondary winding of a step-down transformer is earthed, or if there is an earthed screen between the primary and secondary windings, clearances of basic insulation on the secondary side not less than those specified in Table 16, but using the next lower step for rated impulse voltage		N/A
	Circuits supplied with a voltage lower than rated voltage, clearances of functional insulation are based on the working voltage used as the rated voltage in Table 15		P
29.2	Creepage distances not less than those appropriate for the working voltage, taking into account the material group and the pollution degree.....	(See appended table)	P
	Pollution degree 2 applies, unless		P
	- precautions taken to protect the insulation; pollution degree 1		N/A
	- insulation subjected to conductive pollution; pollution degree 3		N/A
	A force of 2 N is applied to bare conductors, other than heating elements		N/A
	A force of 30 N is applied to accessible surfaces		P
	In a double insulation system, the working voltage for both the basic and supplementary insulation is taken as the working voltage across the complete double insulation system		P
29.2.1	Creepage distances of basic insulation not less than specified in Table 17.....		P
	However, if the working voltage is periodic and has a frequency exceeding 30 kHz, the creepage distances are also determined from Table 2 of IEC 60664-4:2005, these values being used if exceeding the values in Table 17..	(see appended table)	P
	Except for pollution degree 1, corresponding creepage distance not less than the minimum specified for the clearance in Table 16, if the clearance has been checked according to the test of clause 14.....		P
	Creepage distances of supplementary insulation at least those specified for basic insulation in Table 17, excluding NOTE 1 and NOTE 2, or.....		P
	Table 2 of IEC 60664-4:2005, as applicable :		N/A



EN 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
29.2.3	Creepage distances of reinforced insulation at least double those specified for basic insulation in Table 17, excluding NOTE 1 and NOTE 2, or.....	(see appended table)	P
	Table 2 of IEC 60664-4:2005, as applicable.....		N/A
29.2.4	Creepage distances of functional insulation not less than specified in Table 18.....	(see appended table)	P
	However, if the working voltage is periodic and has a frequency exceeding 30 kHz, the creepage distances are also determined from Table 2 of IEC 60664-4:2005, these values being used if exceeding the values in Table 18..	(see appended table)	P
	Creepage distances may be reduced if the appliance complies with clause 19 with the functional insulation short-circuited		P
29.3	Supplementary and reinforced insulation have adequate thickness, or a sufficient number of layers, to withstand the electrical stresses		P
	Compliance checked:		P
	- by measurement, in accordance with 29.3.1, or		P
	for insulation, other than single layer internal wiring insulation, by an assessment of the thermal quality of the material combined with an electric strength test, in accordance with 29.3.3, and		P
	for accessible parts of reinforced insulation consisting of a single layer, by measurement in accordance with 29.3.4, or		N/A
	- by an assessment of the thermal quality of the material according to 29.3.3 combined with an electric strength test in accordance with 23.5, for each single layer internal wiring insulation touching each other, or		N/A
	- as specified in subclause 6.3 of IEC 60664-4:2005 for insulation that is subjected to any periodic voltage having a frequency exceeding 30 kHz		N/A
29.3.1	Supplementary insulation; thickness at least 1 mm		N/A
	Reinforced insulation; thickness of at least 2 mm	Enclosure thickness: Min. 2.0mm	P
29.3.2	Each layer of material withstands the electric strength test of 16.3 for supplementary insulation		N/A



EN 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Supplementary insulation consists of at least 2 layers		N/A
	Reinforced insulation consists of at least 3 layers		N/A
29.3.3	The insulation is subjected to the dry heat test Bb of IEC 60068-2-2, followed by		N/A
	the electric strength test of 16.3		N/A
	If the temperature rise during the tests of clause 19 does not exceed the value specified in Table 3, the test of IEC 60068-2-2 is not carried out		P
29.3.4	Thickness of accessible parts of reinforced insulation consisting of a single layer not less than specified in Table 19.....	Enclosure thickness: Min. 2.0mm	P
30	RESISTANCE TO HEAT AND FIRE		P
30.1	External parts of non-metallic material,	Enclosure	P
	parts supporting live parts, and	Enclosure, T1 bobbin	P
	parts of thermoplastic material providing supplementary or reinforced insulation	Enclosure	P
	sufficiently resistant to heat		P
	This requirement does not apply to:		P
	- the insulation or sheath of flexible cords or internal wiring	(see appended table 30.1)	P
	- those parts of coil formers that do not support or retain terminals in position	(see appended table 30.1)	P
	- parts of ceramic material	(see appended table 30.1)	P
	Ball-pressure test according to IEC 60695-10-2		N/A
	External parts tested at 40 °C plus the maximum temperature rise determined during the test of clause 11, or at 75 °C, whichever is the higher; temperature (°C).....	(See appended table 30.1)	P
	Parts of thermoplastic material providing supplementary or reinforced insulation tested at 25 °C plus the maximum temperature rise determined during clause 19, if higher; temperature (°C).....	(See appended table 30.1)	P
30.2	Parts of non-metallic material resistant to ignition and spread of fire		P
	This requirement does not apply to:		N/A



EN 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
	- parts of a mass not exceeding 0,5 g, provided the cumulative effect is unlikely to propagate flames that originate inside the appliance by propagating flames from one part to another, or		N/A
	- decorative trims, knobs and other parts unlikely to be ignited or to propagate flames that originate inside the appliance		N/A
	Compliance checked by the test of 30.2.1, and in addition:		N/A
	- for attended appliances, 30.2.2 applies		N/A
	- for unattended appliances, 30.2.3 applies		N/A
	For appliances for remote operation, 30.2.3 applies		N/A
	For parts of appliances connected to the supply mains during charging, 30.2.3 applies		N/A
	For base material of printed circuit boards, 30.2.4 applies		N/A
30.2.1	Parts of non-metallic material subjected to the glow-wire test of IEC 60695-2-11:2014 at 550 °C	(See appended table 30.2)	N/A
	However, test not carried out if the material is classified as having a glow-wire flammability index according to IEC 60695-2-12 of at least 550 °C, or		N/A
	the material is classified at least HB40 according to IEC 60695-11-10		N/A
	Parts for which the glow-wire test cannot be carried out need to meet the requirements in ISO 9772 for material classified HBF		N/A
30.2.2	Appliances operated while attended, parts of non-metallic material supporting current-carrying connections, such as switch contacts and the like in other components, and		N/A
	parts of non-metallic material within a distance of 3 mm of such connections,		N/A
	subjected to the glow-wire test of IEC 60695-2-11:2014 with appropriate severity level:		N/A
	- 750 °C, for connections carrying a current exceeding 0,5 A during normal operation Note: Appliance supplied at rated voltage (V)....		N/A
	- 650 °C, for other connections		N/A



EN 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Glow-wire applied to an interposed shielding material, if relevant		N/A
	The glow-wire test is not carried out on parts of material classified as having a glow-wire flammability index according to IEC 60695-2-12 of at least:		N/A
	- 750 °C, for connections carrying a current exceeding 0,5 A during normal operation Note: Appliance supplied at rated voltage (V).....		N/A
	- 650 °C, for other connections		N/A
	The glow-wire test is also not carried out on small parts. These parts		N/A
	- comprise material having a glow-wire flammability index of at least 750 °C, or 650 °C as appropriate, or		N/A
	- comply with the needle-flame test of normative Annex E, or		N/A
	- comprise material classified as V-0 or V-1 according to IEC 60695-11-10.....		N/A
	Glow-wire test not applicable to conditions as specified.....		N/A
30.2.3	Appliances operated while unattended, tested as specified in 30.2.3.1 and 30.2.3.2		N/A
	The tests are not applicable to conditions as specified.....		N/A
30.2.3.1	Parts of non-metallic material supporting connections, such as switch contacts and the like in other components, carrying a current exceeding 0,2 A during normal operation, Note: Appliance supplied at rated voltage (V)..... and		N/A
	parts of non-metallic material, other than small parts, within a distance of 3 mm,		N/A
	subjected to the glow-wire test of IEC 60695-2-11:2014 with a test severity of 850 °C		N/A
	Glow-wire applied to an interposed shielding material, if relevant		N/A
	The glow-wire test is not carried out on parts of material classified as having a glow-wire flammability index according to IEC 60695-2-12 of at least 850 °C		N/A
30.2.3.2	Parts of non-metallic material supporting connections, such as switch contacts and the like in other components, and	Enclosure	P



EN 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
	parts of non-metallic material within a distance of 3 mm,	Enclosure	P
	subjected to the glow-wire test of IEC 60695-2-11:2014 with appropriate severity level:	(see appended table)	P
	- 750 °C, for connections carrying a current exceeding 0,2 A during normal operation Note: Appliance supplied at rated voltage (V)....	Enclosure	P
	- 650 °C, for other connections		N/A
	Glow-wire applied to an interposed shielding material, if relevant		N/A
	However, the glow-wire test of 750 °C or 650 °C as appropriate, is not carried out on parts of material fulfilling both or either of the following classifications:		N/A
	- a glow-wire ignition temperature according to IEC 60695-2-13 of at least:		N/A
	775 °C, for connections carrying a current exceeding 0,2 A during normal operation Note: Appliance supplied at rated voltage (V)....		N/A
	675 °C, for other connections		N/A
	- a glow-wire flammability index according to IEC 60695-2-12 of at least:		N/A
	750 °C, for connections carrying a current exceeding 0,2 A during normal operation Note: Appliance supplied at rated voltage (V)....		N/A
	650 °C, for other connections		N/A
	The glow-wire test is also not carried out on small parts. These parts are to:		N/A
	- comprise material having a glow-wire ignition temperature of at least 775 °C or 675 °C as appropriate, or		N/A
	- comprise material having a glow-wire flammability index of at least 750 °C or 650 °C as appropriate, or		N/A
	- comply with the needle-flame test of normative Annex E, or		N/A
	- comprise material classified as V-0 or V-1 according to IEC 60695-11-10		N/A
	The consequential needle-flame test of Annex E applied to non-metallic parts that encroach within the vertical cylinder placed above the centre of the connection zone and on top of the non-metallic parts supporting current-carrying connections, and parts of non-metallic material within a distance of 3 mm of such connections if these parts are those:		N/A



EN 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
	- parts that withstood the glow-wire test of IEC 60695-2-11:2014 of 750 °C or 650 °C as appropriate, but produce a flame that persist longer than 2 s, or		N/A
	- parts that comprised material having a glow-wire flammability index of at least 750 °C or 650 °C as appropriate, or		N/A
	- small parts, that comprised material having a glow-wire flammability index of at least 750 °C or 650 °C as appropriate, or		N/A
	- small parts for which the needle-flame test of normative Annex E was applied, or		N/A
	- small parts for which a material classification of V-0 or V-1 was applied		N/A
	However, the consequential needle-flame test is not carried out on non-metallic parts, including small parts, within the cylinder that are:		N/A
	- parts having a glow-wire ignition temperature of at least 775 °C or 675 °C as appropriate, or		N/A
	parts comprising material classified as V-0 or V-1 according to IEC 60695-11-10, or		N/A
	- parts shielded by a flame barrier that meets the needle-flame test of normative Annex E or that comprises material classified as V-0 or V-1 according to IEC 60695-11-10		N/A
	No battery in the area of the vertical cylinder used for the consequential needle flame test, unless		N/A
	battery shielded by a barrier that meets the needle flame test of normative Annex E or that comprises material classified as V-0 or V-1 according to IEC 60695-11-10		N/A
30.2.4	Base material of printed circuit boards subjected to the needle-flame test of normative Annex E	(See appended table 30.2/30.2.4)	N/A
	Test not applicable to conditions as specified....		N/A
31	RESISTANCE TO RUSTING		P
	Relevant ferrous parts adequately protected against rusting		P
	Tests specified in part 2 when necessary		N/A
32	RADIATION, TOXICITY AND SIMILAR HAZARDS		P
32.1	Appliance does not emit harmful radiation or present a toxic or similar hazard due to their operation in normal use		P



EN 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Compliance is checked by the limits or tests specified in part 2, if relevant		P
32.2	Appliance do not present an optical radiation hazard due to their operation in normal use		N/A
	Requirement does not apply to lamps and lamp systems that comply with 24.1.10		N/A
	Compliance checked as follows		N/A
	appliance supplied at rated voltage (V)..... Note: Generally 50 Hz is the most unfavourable frequency.		N/A
	- Radiation assessment at or recalculated to 200 mm distance or at fixed use distance, measurement as described in IEC 62471:2006		N/A
	- For lamps or lamp systems intended to illuminate objects, tested at the GLS assessment distance producing 500 lux as described in IEC 62471:2006		N/A
	- Appliance complies with exempt group classification requirements of IEC 62471:2006 regarding actinic ultraviolet hazard (E _s) and near-UV hazard (E _{UVA})		N/A
A	ANNEX A (INFORMATIVE) ROUTINE TESTS		P
	Description of routine tests to be carried out by the manufacturer		P
B	ANNEX B (NORMATIVE) BATTERY-OPERATED APPLIANCES, SEPARABLE BATTERIES AND DETACHABLE BATTERIES FOR BATTERY-OPERATED APPLIANCES		N/A
	The following modifications to this standard are applicable to:		N/A
	- battery-operated appliances and remote controls employing non-rechargeable batteries (primary batteries)		N/A
	- battery-operated appliances and remote controls employing rechargeable batteries (secondary batteries)		N/A
	- detachable and separable batteries for battery-operated appliances		N/A
B.3.1.1	Battery-operated appliance operated under the following conditions:		N/A



EN 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
	- for appliances operated with detachable or separable batteries disconnected from the appliance for charging, appliance operated to perform its intended function with a fully charged battery, the battery being the model or type reference of the battery provided or indicated in the instructions		N/A
	- for appliances operated with integral or separable batteries not disconnected from the appliance for charging, and that cannot perform their intended function while batteries are being charged, appliance operated to perform its intended function with a fully charged battery		N/A
	- for appliances operated with replaceable batteries, including integral replaceable batteries, or non-rechargeable batteries, appliance operated to perform its intended function with the artificial source described in B5.3, upper limit short circuit current capacity specified in Table B.1		N/A
B.3.6.1	Non-rechargeable battery: battery is supplied in a fully charged state and cannot be recharged after		N/A
5.2	Tests of B.19.1 to B.19.6 carried out on separate samples		N/A
5.8.1	This subclause is not applicable		N/A
5.8.2	This subclause is not applicable		N/A
5.8.3	This subclause is not applicable		N/A
5.8.4	This subclause is not applicable		N/A
B.5.1	Before starting a test requiring a fully charged battery, battery fully charged, disconnected from source and allowed to rest between 2 h and 6 h		N/A
B.5.2	Specification of a rated voltage implies the use of a fully charged battery		N/A
	For battery-operated appliances, where the supply terminal connecting the battery have no indication of polarity, the more unfavourably polarity applied, unless		N/A
	such a connection unlikely to occur due to the construction of the appliance		N/A



EN 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
B.5.3	When specified that a battery provided with or intended for the appliance may be replaced by an artificial source, that source consists of a DC power supply or a specially constructed battery, output of each as described in Table B.1 for the relevant battery type		N/A
6.1	Battery-operated appliances without a supply connection or a functional earth connection not classified with respect to protection against electric shock		N/A
7.1	Battery-operated appliances and remote controls containing batteries marked with the:		N/A
	- name, trademark or identification mark of the manufacturer or responsible vendor		N/A
	- model or type reference		N/A
	- IP number according to degree of protection against ingress of water, other than IPX0.....		N/A
	- type reference of the battery, if battery either not recharged in the appliance or non-rechargeable		N/A
	Appliances incorporating replaceable batteries marked with:		N/A
	- battery type reference		N/A
	- battery voltage (V).....		N/A
	- polarity of the terminals, unless		N/A
	incorrect insertion of battery by the user unlikely to occur due to the construction of the appliance		N/A
	If more than one battery type can be used with the appliance, appliance marked with the type reference of at least one of the battery types that can be used, together with:		N/A
	- symbol ISO 7000-0790 (2004-01), or		N/A
	- the substance of the following:		N/A
	See instruction manual for additional battery types.		N/A
	If appliances use more than one battery, appliance marked to indicate correct polarity connection of the batteries		N/A
	If relevant, positive terminal indicated by symbol IEC 60417-5005 (2002-10), and		N/A
	negative terminal indicated by symbol IEC 60417-5006 (2002-10)		N/A
	Detachable and separable batteries marked with:		N/A



EN 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
	- name, trade mark or identification mark of the manufacturer or responsible vendor		N/A
	- model or type reference		N/A
	- IP number according to degree of protection against ingress of water, other than IPX0.....		N/A
	Detachable and separable batteries disconnected from the appliance for charging the battery marked with:		N/A
	- symbol ISO 7000-0790 (2004-01)		N/A
	- symbol IEC 60417-6413 (2019-05)		N/A
	- model or type reference of the battery charger, or the substance of the following:		N/A
	Use only with <model or type reference> battery charger.....		N/A
	If more than one battery charger can be used to charge a detachable and separable battery disconnected from the appliance for charging, battery marked with the type reference of at least one of the battery charges that can be used, together with		N/A
	either symbol ISO 7000-0790 (2004-01), or the substance of the following:		N/A
	See instruction manual for additional battery chargers.		N/A
	Batteries that are user replaceable, other than general purpose batteries, marked with the:		N/A
	- name, trademark or identification mark of the manufacturer or responsible vendor		N/A
	- model or type reference		N/A
	- nominal voltage (V).....		N/A
7.6	Additional symbols		N/A
7.12	Instructions provided with the appliance		N/A
	For appliances intended for use at altitudes exceeding 2 000 m, maximum altitude stated		N/A
	If necessary, appropriate details on precautions during user maintenance stated		N/A
	The instructions state the substance of the following:		N/A



EN 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
	This appliance is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction concerning use of the appliance by a person responsible for their safety. Children should be supervised to ensure that they do not play with the appliance.		N/A
	For appliances incorporating batteries intended to be removed for charging or intended to be replaced by the user and that can be contained in the small parts cylinder, the instructions state the substance of the following:		N/A
	WARNING: Keep out of reach of children. Swallowing can lead to chemical burns, perforation of soft tissue, and death. Severe burns can occur within 2 h of ingestion. Seek medical attention immediately.		N/A
	For appliances intended for use with batteries that use metal-ion chemistries, the instructions state the normal temperature range for charging		N/A
	For battery-operated appliances, the instructions contain the following information, as applicable:		N/A
	- battery type		N/A
	- details regarding safe disposal of used batteries		N/A
	- how to deal with leaking batteries		N/A
	For battery-operated appliances, the instructions contain the substance of the following:		N/A
	- do not expose the appliance or battery to excessive temperatures		N/A
	- be aware of the risk of terminals of the battery-operated appliance or battery being short-circuited by metal objects		N/A
	For battery-operated appliances containing non-rechargeable batteries, the instructions state the substance of the following:		N/A
	This appliance contains non-rechargeable batteries, these batteries are not to be recharged.		N/A
	For battery-operated appliances containing non-user-replaceable batteries, the instructions state the substance of the following:		N/A
	This appliance contains batteries that are only replaceable by skilled persons.		N/A



EN 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
	For battery-operated appliances containing non-replaceable batteries, the instructions state the substance of the following:		N/A
	This appliance contains batteries that are non-replaceable. When the battery is at end of life, the appliance shall be properly disposed of.		N/A
	For battery-operated appliances incorporating batteries intended to be removed for charging or replaced by the user, the instructions include, as applicable, the substance of the following:		N/A
	- rechargeable batteries are to be removed from the appliance before being charged		N/A
	- different types of batteries or new and used batteries are not to be mixed		N/A
	- exhausted batteries are to be removed from the appliance and safely disposed of		N/A
	- if the appliance is to be stored unused for a long period, the batteries should be removed		N/A
	- do not use non-rechargeable batteries in place of rechargeable batteries		N/A
	- do not use modified or damaged batteries		N/A
	For battery-operated appliances incorporating batteries intended to be removed for charging or replaced by the user, the instructions include, as applicable, the following information:		N/A
	battery type reference		N/A
	- orientation of the battery with regard to polarity		N/A
	- method of replacing batteries including maintaining correct polarity		N/A
	For battery-operated appliances incorporating batteries intended to be removed prior to disposal of the appliance, the instructions include details regarding their safe removal and disposal		N/A
	For battery-operated appliances that use detachable and separable batteries disconnected from the appliance for charging, the instructions include the model or type reference of the battery charger to be used, along with the substance of the following:		N/A
	WARNING: Use only with <model or type reference> battery charger.		N/A
	If the symbol for battery charger is used, its meaning is explained		N/A



EN 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
7.15	Markings specified for batteries intended to be replaced by the user are in or adjacent to the battery compartment		N/A
	Marking to indicate correct polarity connection of the batteries specified for appliances using more than one general purpose battery is in or adjacent to the battery compartment		N/A
	Type reference of battery charger placed next to symbol IEC 60417-6413 (2019-05)		N/A
8	This clause is not applicable to the appliance functional part of a battery-operated appliance and its batteries, providing the battery circuits do not have an earth or mains connection		N/A
10.1	This subclause is not applicable		N/A
10.2	This subclause is not applicable		N/A
11.1	Battery operated appliances, their surroundings, and batteries not attaining excessive temperatures in normal use		N/A
	Compliance tested under the conditions specified in B.11.1, 11.2, 11.3, 11.7 and 11.8		N/A
11.4	This subclause is not applicable		N/A
11.5	This subclause is not applicable		N/A
11.6	This subclause is not applicable		N/A
B.11.1	Battery-operated appliances tested under the conditions of normal operation		N/A
	For appliances operated with detachable or separable batteries disconnected for charging, appliance operated until depletion of battery and test repeated with fully charged battery until it depletes or until temperature rises have stabilized as specified, whichever occurs first		N/A
	For appliances incorporating integral or separable batteries not disconnected for charging, and that cannot perform while batteries are being charged, appliance operated until depletion of batteries		N/A
	For appliances operated with replaceable or non-rechargeable batteries, appliance operated until the minimum capacity of the battery as specified in Table B.1 has been delivered or until steady conditions are established, whichever occurs first		N/A



EN 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
19.1	For battery-operated appliances, instead of the tests specified, tests of 19.2, 19.4, 19.7, 19.9, 19.11, 19.12, 19.14, 19.15, B.19.1 to B.19.5		N/A
	Detachable and separable batteries also subjected to the test of B.19.6		N/A
	For battery-operated appliances, tests carried out under normal operation		N/A
19.2	Appliances with heating elements tested under the conditions specified in Clause 11 but with restricted heat dissipation		N/A
19.7	Battery-operated appliance switched on and operated under stalled conditions by:		N/A
	- locking the rotor of appliances for which the locked rotor torque is smaller than the full load torque		N/A
	- locking moving parts of other appliances		N/A
	If an appliance has more than one motor, test carried out for each motor separately		N/A
	Test conducted at both I_{sc} (high) and I_{sc} (low), if testing with the artificial source described in B.5.3		N/A
	Test conducted:		N/A
	- until the test sample achieves a steady condition, including returning to room temperature, or		N/A
	- until at a time period of at least 3 h has elapsed		N/A
19.11	Electronic circuits checked by evaluation of the fault conditions specified in 19.11.2 for all circuits or parts of circuits, unless they comply with the conditions specified in 19.11.1		N/A
	Appliances having a device with an off position obtained by electronic disconnection, or a device that can place the appliance in a stand-by mode, subjected to the tests of 19.11.4		N/A
	If the safety of the appliance under any of the fault conditions depends on the operation of a miniature fuse-link complying with IEC 60127, test of 19.12 carried out, and		N/A
	the appliance complies with the conditions specified in 19.13		N/A



EN 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
	If a conductor of a printed circuit board becomes open-circuited, the appliance is considered to have withstood the particular test, provided that the base material of the printed circuit board withstands the test of normative Annex E		N/A
19.11.2	When any of the fault conditions simulated, duration of test until steady conditions		N/A
19.11.4	Appliances having a device with an off position obtained by electronic disconnection, or a device that can be placed in the stand-by mode, subjected to the tests of 19.11.4.1 and 19.11.4.2		N/A
	Tests carried out with the appliance supplied by a fully charged battery, the device being set in the off position or in the stand-by mode		N/A
	Appliances incorporating a protective electronic circuit subjected to the tests of 19.11.4.1 and 19.11.4.2		N/A
	Tests carried out after the protective electronic circuit has operated during the relevant tests of Clause 19 except 19.2 and 19.11.3		N/A
19.11.4.8	Battery operated appliances are supplied with a fully charged battery, operated under normal operation for 60 s, and then subjected to a 60 s interruption of the battery current		N/A
	When battery current restored, the appliance:		N/A
	- continues to operate normally from the same operation cycle point reached before the battery supply was interrupted, or		N/A
	- does not continue operating without requiring manual intervention to restart from the same operating cycle point reached before the battery supply was interrupted, or		N/A
	- does not continue operating without requiring manual intervention to restart from the part of the cycle selected by the user		N/A
19.13	During tests, no flames, molten metal or poisonous or ignitable gas in hazardous amounts and temperature rises not exceeding the values shown in Table 9.....		N/A
	No explosion or ignition of the battery during or after the test		N/A
	Venting of cells permitted through their vents		N/A



EN 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
	After the tests, and when the appliance has cooled to room temperature, compliance with B.22.3 and B.22.5 not impaired and the appliance complies with 20.2 and Clause 29, if still operable		N/A
	For appliances immersed in or filled with conducting liquid in normal use, appliance immersed in or filled with water for 24 h before the test of B.22.5		N/A
	No dangerous malfunction and no failure of protective electronic circuits, if still operable		N/A
	Appliances tested with an electronic switch in the off position:		N/A
	- do not become operational, or		N/A
	- do not result in a dangerous malfunction during or after the tests of 19.11.4, if they become operational		N/A
	In an appliance containing lids or doors controlled by one or more interlocks, one of the interlocks may be released if both of the following conditions are fulfilled:		N/A
	- no movement to an open position when released		N/A
	- no restart after the cycle in which it was released		N/A
19.15	For battery-operated appliances incorporating a manual voltage selector switch intended to select battery voltage, switch set to lowest voltage position and highest voltage applied		N/A
B.19.1	Supply terminals of a battery-operated appliance having an indication of polarity connected to the battery terminals of opposite polarity, unless		N/A
	connection by the user unlikely to occur		N/A
B.19.2	For battery-operated appliances with provision for multiple batteries, one or more of the batteries reversed and appliance operated, if reversal by the user of battery polarity allowed by the construction		N/A
B.19.3	For battery-operated appliances with motor(s), terminals of each motor short circuited one at a time, where the resistance of the short-circuit does not exceed 10 mW and while operated under the conditions of Clause 11		N/A



EN 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Test conducted until steady conditions are achieved, including returning to room temperature or until a time period of at least 3 h		N/A
B.19.4	Test conducted with all the cells of the battery fully charged and, for batteries consisting of more than one cell, one cell fully discharged on a detachable or separable battery connected to the appliance or on an appliance containing an integral battery		N/A
	Main discharge connections of the battery shorted with a resistance not to exceed 10 mW, conducted until a non-self-resetting protection device operates or an intentionally weak part becomes permanently open-circuited or until the test sample returns to room temperature		N/A
B.19.5	Battery-operated appliance and any cords except supply cords, as appropriate, tested with the battery connected, under the following fault conditions applied one at a time:		N/A
	- any cord provided between the battery-operated appliance and a separable battery is short-circuited at the point along its length likely to produce the most adverse effects		N/A
	- for appliances having replaceable batteries that are replaceable and that can be removed without the aid of a tool, and having terminals that can be short-circuited by a thin straight bar, the terminals of the battery are short-circuited		N/A
	- charging terminals of the battery-operated appliance that are simultaneously accessible with the test probe 13 of IEC 61032 are short circuited so as to produce the most unfavourable result		N/A
	Battery-operated appliance switched on and no additional mechanical load applied		N/A
	Tests conducted until the test sample achieves a steady condition, including returning to room temperature or, until a time period of at least 3 h		N/A
	Resistance of short circuit not exceeding 10 mW		N/A
B.19.6	For detachable and separable batteries, combinations of terminals simultaneously accessible by applying the test probe 13 of IEC 61032 short circuited so as to produce the most unfavourable result		N/A



EN 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
B.20.1	The enclosure of a battery-operated appliance incorporating an integral battery that uses metal-ion chemistry withstands the pressure generated when a cell vents during failure		N/A
	Compliance checked by inspection after the tests of Clause 19 for batteries with a capacity less than 0,2 Ah, and measurement or test as specified		N/A
B.20.2	The enclosure of detachable and separable batteries that use metal-ion chemistries withstands the pressure generated when a cell vents during failure; tests as specified		N/A
	Compliance checked by inspection after the tests of Clause 19 for batteries with a capacity less than 0,2 Ah, and measurement or test as specified		N/A
21.1	Battery-operated appliances have adequate mechanical strength and are constructed to withstand rough handling expected in normal use		N/A
	Appliance fitted with fully charged batteries and rigidly supported subjected to test Ehb of IEC 60068-2-75, three blows of 0,5 J applied to every point of the appliance enclosure likely to be weak		N/A
	If necessary, blows also applied to handles, levers, knobs and similar parts and to signal lamps and their covers, but only if the lamps or covers protrude from the enclosure by more than 10 mm or if their surface area exceeds 4 cm ²		N/A
	Lamps within the appliance and their covers only tested if likely to be damaged in normal use		N/A
	When applying the release cone to the guard of a visibly glowing heating element, the hammer head passing through the guard does not strike the heating element		N/A
	In case of doubt, defect neglected and the group of three blows applied to the same place on a new sample which then withstands the test		N/A
	Hand-held battery-operated appliances also subjected to test free-fall - procedure 1, of IEC 60068-2-31, under the specified conditions		N/A



EN 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Free-fall test does not cause the appliance to catch fire, leak fluid visible from the outside or explode and meets the requirements of Clause 20, Clause 29, B.22.3 and B.22.5 where short circuit of functional insulation will impair compliance with this standard		N/A
B.21.1	Separable and detachable batteries, when not connected to the appliance, have adequate mechanical strength and are constructed to withstand rough handling expected in normal use		N/A
	Fully charged battery, rigidly supported, subject to test Ehb of IEC 60068-2-75, three blows of 0,5 J applied to every point of the battery enclosure likely to be weak		N/A
	In case of doubt, defect neglected and the group of three blows applied to the same place on a new sample which then withstands the test		N/A
	Detachable and separable batteries subjected to the test free-fall - procedure 1, of IEC 60068-2-31, under the conditions as specified		N/A
	Free-fall test does not damage the battery or cause it to catch fire, leak fluid visible from the outside or explode and meets the requirements of Clause 20, Clause 29, B.22.4 and B.22.5 where short circuit of functional insulation will impair compliance with this standard		N/A
	For batteries using metal-ion chemistry:		N/A
	- open circuit voltage of the battery 24 h after the tests not less than 90 % of the voltage measured immediately prior to the tests		N/A
	- cells only vented through their vents		N/A
22.11	Non-detachable parts that protect against electric shock, moisture or contact with moving parts reliably are fixed and withstand the mechanical stress occurring during normal use		N/A
	Snap-in devices used for fixing such parts have an obvious locked position		N/A
	Fixing properties of snap-in devices used in parts that are likely to be removed during installation or servicing reliable		N/A



EN 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
22.20	Direct contact between current carrying parts and thermal insulation that would impair compliance with this standard effectively prevented, unless		N/A
	such material is noncorrosive, non-hygroscopic and non-combustible		N/A
	Not applicable to glass-wool thermal insulation		N/A
22.24	Not applicable to battery-operated appliances that do not contain parts requiring protection against simultaneous contact according to B.22.3		N/A
22.25	Not applicable to battery-operated appliances that do not contain parts requiring protection against simultaneous contact according to B.22.3		N/A
22.26	This subclause is not applicable		N/A
22.27	This subclause is not applicable		N/A
22.28	This subclause is not applicable		N/A
22.29	This subclause is not applicable		N/A
22.30	This subclause is not applicable		N/A
22.31	This subclause is not applicable		N/A
22.32	This subclause is not applicable		N/A
22.33	Conductive liquids that are or may become accessible in normal use and conductive liquids that are in contact with accessible metal parts are not in direct contact with current carrying parts or unearthed metal parts that are separated from current carrying parts by basic insulation only or with other current carrying parts such that compliance with B.22.3 and B.22.4 would be impaired		N/A
22.34	This subclause is not applicable		N/A
22.35	This subclause is not applicable		N/A
22.36	This subclause is not applicable		N/A
22.37	This subclause is not applicable		N/A
B.22.1	User accessible interfaces between elements of a battery system (not mains connections) do not employ appliance couplers according to IEC 60320 (all parts) or IEC 60309-2		N/A
	User accessible interfaces between elements of a battery system (not mains connections) do not employ connectors of the following types unless the battery system is adequately protected against the use of an incorrect supply:		N/A



EN 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
	- barrel connectors with outside diameters of 6,5 mm or less		N/A
	- concentric connectors with a diameter of 3,5 mm or less according to IEC 60603-11		N/A
	Compliance checked by inspection, measurement and for determining adequacy of protection against use of an incorrect supply, by the test as specified		N/A
	Source selected such that its current capability does not limit the charging of the battery		N/A
	During the application of incremental voltages, the appliance is either operating normally or, if not, does not emit flames, molten metal, or poisonous or ignitable gas in hazardous amounts and temperature rises do not exceed the values shown in Table 9		N/A
	No explosion or ignition of the battery during or after the test		N/A
	Venting of cells permitted through their vents		N/A
B.22.2	External surfaces of detachable and separable batteries protected against excessive heat from heat sources (directly or via heated discharge air) present during operation of the appliance		N/A
B.22.3	Battery-operated appliances so constructed and enclosed that there is adequate protection against simultaneous contact with two or more conductive parts where the:		N/A
	- voltage between them exceeds 42,4 V		N/A
	- current between the conductive parts exceeds 2 mA for DC or 0,7 mA peak for when ripple exceeds 10 %		N/A
	Compliance checked with test probe B and test probe 18 of IEC 61032 as described		N/A
	Detachable parts except lamps behind a detachable cover removed during the tests with test probe B, however		N/A
	during insertion or removal of lamps located behind a detachable cover, protection against simultaneous contact with parts having a voltage between them exceeding 42,4 V ensured		N/A
	During the tests with test probe 18, appliance fully assembled as in normal use, no parts removed		N/A



EN 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
	However, test probe 18 not applied to appliances for commercial use, unless		N/A
	intended to be installed in an area open to the public		N/A
	Not possible to touch two or more conductive parts of opposite polarity with the probes if the voltage between them exceeds 42,4 V and the current between them exceeds 2 mA for DC or 0,7 mA peak for when ripple exceeds 10 %		N/A
	Current measured using the circuit in Figure 4 of IEC 60990:2016		N/A
B.22.4	Separable and detachable batteries so constructed and enclosed that there is adequate protection against simultaneous contact with two or more conductive parts where the:		N/A
	- voltage between them exceeds 42,4 V		N/A
	- current between the conductive parts exceeds 2 mA		N/A
	Compliance checked with test probe B and test probe 18 of IEC 61032 as described		N/A
	During the tests with:		N/A
	- test probe B, all detachable parts removed		N/A
	- test probe 18, no parts removed		N/A
	However, test probe 18 not applied to appliances for commercial use, unless		N/A
	intended to be installed in an area open to the public		N/A
	Not possible to touch two or more conductive parts of opposite polarity with the probes if the voltage between them exceeds 42,4 V and the current between them exceeds 2 mA		N/A
	Current measured using the circuit in Figure 4 of IEC 60990:2016		N/A
B.22.5	Insulating materials providing protection against simultaneous contact with two or more conductive parts are adequate when:		N/A
	- they are within 1,0 mm of the conductive parts		N/A
	- the voltage between the conductive parts exceeds 42,4 V peak		N/A
	- the current between the conductive parts exceeds 2 mA for DC or 0,7 mA peak for when ripple exceeds 10 %		N/A



EN 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Insulating material subjected to voltage test as specified at 750 V or 1,2 times the working voltage plus 700 V, whichever greater, in accordance with IEC 61180 (V).....		N/A
	No breakdown during the test		N/A
	Current measured using the circuit in Figure 4 of IEC 60990:2016		N/A
B.22.6	Vents of cells not obstructed such that their operation is defeated if venting is relied upon compliance with this standard		N/A
23.3	Instead of the electric strength test of 16.3, battery-operated appliances comply with B.22.3		N/A
23.5	For battery-operated appliances compliance is checked by the test of B.22.5		N/A
24.1	Batteries are not required to comply with IEC 62133-1:2017 or IEC 62133-2:2017, they are tested as part of the appliance according to this standard		N/A
24.1.1	This subclause is not applicable		N/A
24.1.3	Switches in battery-operated appliances have adequate breaking capacity and withstand, without excessive wear or other harmful effect, the mechanical, electrical, and thermal stresses occurring in the battery-operated appliance		N/A
	Tests as described and according to the relevant standard for switches, IEC 61058-1-1:2016 for mechanical switches and IEC 61058-1-2:2016 for electronic switches		N/A
	Required cycles of operation completed, no electrical or mechanical failure		N/A
	At the end of the tests:		N/A
	- switch contacts operating properly in the "on" and "off" positions		N/A
	- temperature rise of the switch terminals not increased by more than 30 K above the temperature rise measured in Clause 11		N/A
B.24.1	The relevant standards for non-acid based electrolyte cells employed in batteries are IEC 62133-1:2017 for nickel systems and IEC 62133-2:2017 for lithium systems		N/A



EN 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
	A battery that uses metal-ion chemistry is additionally subjected to the tests of subclauses 7.3.8.1 (vibration) and 7.3.8.2 (mechanical shock) of IEC 62133-2:2017		N/A
25.9	The requirement also applies to interconnection cords of battery-operated appliances		N/A
25.14	The requirement also applies to interconnection cords of battery-operated appliances		N/A
25.15	The requirement also applies to interconnection cords of battery-operated appliances		N/A
B.25.1	Insulated conductors of interconnection cords of battery-operated appliances comply with the requirements for internal wiring and are provided with at least 0,5 mm thick outer sheath made of insulating material equivalent to that of supply cords described in 25.7		N/A
B.26.1	Terminal devices in an appliance for the connection of the flexible leads or flexible cord connecting a separable battery so located or shielded that there is no risk of incorrect connection		N/A
27.1	The battery-operated appliance does not have a provision for a protective earth but may incorporate a functional earth.		N/A
29.1	Clearances not less than the values specified in Table 16, taking into account the rated impulse voltage		N/A
	For battery-operated appliances, the rated impulse voltage is 500 V for working voltages less than 50 V and 1 500 V for all other working voltages		N/A
	However, if the construction, including between parts of opposite polarity for connecting the battery, is such that the distances could be affected by wear, by distortion, by movement of the parts or during assembly, the clearances for rated impulse voltages of 1 500 V are increased by 0,5 mm and the impulse voltage test is not applicable		N/A



EN 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
B.29.1.1	For parts requiring protection against simultaneous contact according to B.22.3 and B.22.4, the sum total of the clearances between each of these parts and their nearest accessible surface is not less than two times the Table 16 clearance taking into account the rated impulse voltage		N/A
	For the purpose of this determination, at least one of the clearances is not less than 1,0 mm.		N/A
B.29.2.1	For parts requiring protection against simultaneous contact according to B.22.3 and B.22.4, the sum total of the creepage distances between each of these parts and their nearest accessible surface is not less than two times the Table 17 creepage distances.		N/A
	For the purpose of this determination, at least one of the creepage distances is not less than 1,0 mm		N/A
30.1	External parts of non-metallic material, the deterioration of which might cause the battery-operated appliance, separable battery or detachable battery to fail to comply with this annex, are sufficiently resistant to heat		N/A
C	ANNEX C (NORMATIVE) AGEING TEST ON MOTORS		N/A
	Tests, as described, carried out when doubt with regard to the temperature classification of the insulation of a motor winding		N/A
	Test conditions as specified		N/A
D	ANNEX D (NORMATIVE) THERMAL MOTOR PROTECTORS		N/A
	Applicable to appliances having motors that incorporate thermal motor protectors necessary for compliance with the standard		N/A
	Test conditions as specified with appliance supplied at rated voltage (V)..... Induction motors See DSH 543AA		N/A
E	ANNEX E (NORMATIVE) NEEDLE-FLAME TEST		P
	Needle-flame test carried out in accordance with IEC 60695-11-5:2016, with the following modifications:		P
7	Flame application times		P



EN 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
	The duration of application of the test flame is 30 s ± 1 s		P
9	Test procedure		P
9.2	The specimen so arranged that the flame can be applied to a vertical or horizontal edge as shown in the examples of Figure 2		P
9.3	The first paragraph does not apply		P
	If possible, the flame is applied at least 10 mm from a corner		N/A
9.4	The test is carried out on one specimen		P
	If the specimen does not withstand the test, the test may be repeated on two additional specimens, both withstanding the test		P
11	Evaluation of test results		P
	The duration of burning not exceeding 30 s		P
	However, for printed circuit boards, the duration of burning not exceeding 15 s		P
F	ANNEX F (NORMATIVE) CAPACITORS		N/A
	Capacitors likely to be permanently subjected to the supply voltage, and used for radio interference suppression or voltage dividing, comply with the following clauses of IEC 60384-14:2013 including IEC 60384-14:2013/AMD1:2016, with the following modifications:		N/A
1.5	Terms and definitions		N/A
1.5.3	Class X capacitors tested according to subclass X2		N/A
1.5.4	Class Y capacitors tested according to subclass Y2		N/A
1.6	Marking		N/A
	Items a) and b) are applicable		N/A
3.4	Approval testing		N/A
3.4.3.2	Table 3 is applicable as described		N/A
4.1	Visual examination and check of dimensions		N/A
	This subclause is applicable		N/A
4.2	Electrical tests		N/A
4.2.1	This subclause is applicable		N/A
4.2.5	This subclause is applicable		N/A
4.2.5.2	Only Table 11 is applicable		N/A



EN 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Values for test A apply		N/A
	However, for capacitors in heating appliances the values for test B or C apply		N/A
4.12	Damp heat, steady state		N/A
	This subclause is applicable		N/A
	Only insulation resistance and voltage proof are checked		N/A
4.13	Impulse voltage		N/A
	This subclause is applicable		N/A
4.14	Endurance		N/A
	Subclauses 4.14.1, 4.14.3, 4.14.4 and 4.14.7 are applicable		N/A
4.14.7	Only insulation resistance and voltage proof are checked		N/A
	No visible damage		N/A
4.17	Passive flammability test		N/A
	This subclause is applicable		N/A
4.18	Active flammability test		N/A
	This subclause is applicable		N/A
G	ANNEX G (NORMATIVE) SAFETY ISOLATING TRANSFORMERS		P
	The following modifications to this standard are applicable for safety isolating transformers:		P
7	Marking and instructions		P
7.1	Transformers for specific use marked with the:		P
	- name, trademark or identification mark of the manufacturer or responsible vendor.....		P
	- model or type reference.....		P
17	Overload protection of transformers and associated circuits		P
	Fail-safe transformers comply with subclause 15.5 of IEC 61558-1:2017		N/A
22	Construction		P
	Subclauses 19.1 and 19.1.2 of IEC 61558-2-6:2009 are applicable		P
29	Clearances, creepage distances and solid insulation		P
29.1, 29.2, 29.3	The distances specified in Table 20, Table 21 and Table 22 of IEC 61558-1:2017 apply		P



EN 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
	For insulated winding wires complying with subclause 19.12.3 of IEC 61558-1:2017 there are no requirements for clearances or creepage distances		P
	For windings providing reinforced insulation, the distances specified in Table 20 and Table 21 of IEC 61558-1:2017 are not assessed		P
	For safety isolating transformers subjected to periodic voltages with a frequency exceeding 30 kHz, the clearances, creepage distances and solid insulation values specified in IEC 60664-4:2005 are applicable, if greater than the values specified in Table 20, Table 21 and Table 22 of IEC 61558-1:2017		P
H	ANNEX H (NORMATIVE) SWITCHES		N/A
	Switches comply with the following clauses of IEC 61058-1:2016 and IEC 61058-1-1:2016, as modified below:		N/A
	The tests carried out under the conditions occurring in the appliance		N/A
	Before being tested, switches are operated 20 times without load		N/A
8	Marking and documentation		N/A
	Switches are not required to be marked		N/A
	However, a switch that can be tested separately from the appliance marked with the manufacturer's name or trademark and the type reference		N/A
13	Mechanism		N/A
	The tests can be carried out on a separate sample		N/A
15	Insulation resistance and dielectric strength		N/A
15.1	Not applicable		N/A
15.2	Not applicable		N/A
15.3	Applicable for full disconnection and micro-disconnection, test carried out immediately after the humidity test of subclause 15.3 of EN 60335-1		N/A
17	Endurance		N/A
	Compliance is checked on three separate appliances or switches		N/A



EN 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
	For 17.5.4 of IEC 61058-1-1:2016, the number of cycles of actuation declared according to 7.4 is 10 000, unless		N/A
	otherwise specified in 24.1.3 of EN 60335-1.....		N/A
	Switches for operation under no load and which can be operated only by a tool, and		N/A
	switches operated by hand that are interlocked so that they cannot be operated under load,		N/A
	are not subjected to the tests		N/A
	However, switches without this interlock are subjected to the test of 17.5.4 of IEC 61058-1-1:2016 for 100 cycles of operation		N/A
	Subclauses 17.3 and 17.6.2 of IEC 61058-1-1:2016 not applicable		N/A
	The ambient temperature during the test is that occurring in the appliance during the test of Clause 11 in EN 60335-1		N/A
	The temperature rise of the terminals not more than 30 K above the temperature rise measured in clause 11 of EN 60335-1 (K).....		N/A
20	Clearances, creepage distances, solid insulation and coatings of rigid printed board assemblies		N/A
	Clause 20 of IEC 61058-1:2016 is applicable to clearances across full disconnection and micro-disconnection		N/A
	It is also applicable to creepage distances for functional insulation, across full disconnection and micro-disconnection, as stated in Table 14		N/A
I	ANNEX I (NORMATIVE) MOTORS HAVING BASIC INSULATION THAT IS INADEQUATE FOR THE RATED VOLTAGE OF THE APPLIANCE		N/A
	The following modifications to this standard are applicable for motors having basic insulation that is inadequate for the rated voltage of the appliance:		N/A
8	Protection against access to live parts		N/A
8.1	Metal parts of the motor are considered to be bare live parts		N/A
11	Heating		N/A
11.3	The temperature rise of the body of the motor is determined instead of the temperature rise of the windings		N/A



EN 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
11.8	The temperature rise of the body of the motor, where in contact with insulating material, not exceeding values in Table 3 for the relevant insulating material		N/A
16	Leakage current and electric strength		N/A
16.3	Insulation between live parts of the motor and its other metal parts is not subjected to the test		N/A
19	Abnormal operation		N/A
19.1	The tests of 19.7 to 19.9 are not carried out		N/A
I.19.1	Appliance operated at rated voltage with each of the following fault conditions:		N/A
	Rated voltage (V).....		N/A
	- short circuit of the terminals of the motor, including any capacitor incorporated in the motor circuit		N/A
	- short circuit of each diode of the rectifier		N/A
	- open circuit of the supply to the motor		N/A
	- open circuit of any parallel resistor, the motor being in operation		N/A
	Only one fault simulated at a time, the tests carried out consecutively		N/A
22	Construction		N/A
I.22.1	For class I appliances incorporating a motor supplied by a rectifier circuit, the DC circuit being insulated from accessible parts of the appliance by double or reinforced insulation		N/A
	Compliance checked by the tests specified for double and reinforced insulation		N/A
J	ANNEX J (NORMATIVE) COATED PRINTED CIRCUIT BOARDS		N/A
	Protective coatings of printed circuit boards comply with IEC 60664-3:2016 with the following modifications:		N/A
5.1	General		N/A
	When production samples are used, three samples of the printed circuit board are tested		N/A
5.7.2	Cold conditioning		N/A
	The test is carried out at -25 °C		N/A
5.7.4	Rapid change of temperature		N/A
	Severity 1 is specified, the number of cycles is 5		N/A



EN 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
5.7.5.2	Additional conditioning with respect to electromigration		N/A
	The test duration is 10 days		N/A
5.9	Additional tests		N/A
	This subclause is not applicable		N/A
K	ANNEX K (INFORMATIVE) OVERVOLTAGE CATEGORIES		N/A
	The information on overvoltage categories is extracted from IEC 60664-1:2007		N/A
	Overvoltage category is a numeral defining a transient overvoltage condition		N/A
	Equipment of overvoltage category IV is for use at the origin of the installation		N/A
	Equipment of overvoltage category III is equipment in fixed installations and for cases where the reliability and the availability of the equipment is subject to special requirements		N/A
	Equipment of overvoltage category II is energy consuming equipment to be supplied from the fixed installation		N/A
	If such equipment is subjected to special requirements with regard to reliability and availability, overvoltage category III applies		N/A
	Equipment of overvoltage category I is equipment for connection to circuits in which measures are taken to limit transient overvoltages to an appropriately low level		N/A
L	ANNEX L (INFORMATIVE) GUIDANCE FOR THE MEASUREMENT OF CLEARANCES AND CREEPAGE DISTANCES		P
	Information for the determination of clearances and creepage distances		P
M	ANNEX M (INFORMATIVE) POLLUTION DEGREE		P
	The information on pollution degrees is extracted from IEC 60664-1:2007		P
	Pollution		P
	The microenvironment determines the effect of pollution on the insulation, taking into account the macroenvironment		P
	Means may be provided to reduce pollution at the insulation by effective enclosures or similar		P



EN 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Minimum clearances specified where pollution may be present in the microenvironment		P
	Degrees of pollution in the microenvironment		P
	For evaluating creepage distances, the following degrees of pollution in the microenvironment are established:		P
	- pollution degree 1: no pollution or only dry, non-conductive pollution occurs. The pollution has no influence		N/A
	- pollution degree 2: only non-conductive pollution occurs, except that occasionally a temporary conductivity caused by condensation is to be expected		P
	- pollution degree 3: conductive pollution occurs or dry non-conductive pollution occurs that becomes conductive due to condensation that is to be expected		N/A
	- pollution degree 4: the pollution generates persistent conductivity caused by conductive dust or by rain or snow		N/A
N	ANNEX N (NORMATIVE) PROOF TRACKING TEST		P
7	Test apparatus		P
7.3	Test solutions		P
	Test solution A is used		P
10	Determination of proof tracking index (PTI)		P
10.1	Procedure		P
	Proof voltage of 100 V, 175 V, 400 V or 600 V... 175 V		P
	The test is carried out on five specimens		N/A
	In case of doubt, additional test with proof voltage reduced by 25 V, the number of drops increased to 100		N/A
10.2	Report		N/A
	The report states if the PTI value was based on a test using 100 drops with a test voltage of (PTI-25) V		N/A
O	ANNEX O (INFORMATIVE) SELECTION AND SEQUENCE OF THE TESTS OF CLAUSE 30		P
	Description of tests for determination of resistance to heat and fire		P
P	ANNEX P (INFORMATIVE) GUIDANCE FOR THE APPLICATION OF THIS STANDARD TO APPLIANCES USED IN TROPICAL CLIMATES		N/A



EN 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Modifications applicable for class 0 and 0I appliances having a rated voltage exceeding 150 V, intended to be used in countries having a tropical climate and that are marked with symbol IEC 60417-6332 (2015-06)		N/A
	Modifications may also be applied to class I appliances having a rated voltage exceeding 150 V, intended to be used in countries having a tropical climate and that are marked with symbol IEC 60417-6332 (2015-06), if liable to be connected to a supply mains that excludes the protective earthing conductor		N/A
5.7	The ambient temperature for the tests of clauses 11 and 13 is 40 +3/0 °C		N/A
7.1	The appliance marked with symbol IEC 60417-6332 (2015-06)		N/A
7.6	Symbol IEC 60417-6332 (2015-06)		N/A
7.12	The instructions state that the appliance is to be supplied through a residual current device (RCD) having a rated residual operating current not exceeding 30 mA		N/A
	The instructions state that the appliance is considered to be suitable for use in countries having a tropical climate, but may also be used in other countries		N/A
	If symbol IEC 60417-6332 (2015-06) is used, its meaning is explained		N/A
11.8	The values of Table 3 are reduced by 15 K		N/A
13.2	The leakage current for class I appliances not exceeding 0,5 mA		N/A
15.3	The value of t is 37 °C		N/A
16.2	The leakage current for class I appliances not exceeding 0,5 mA (mA).....		N/A
19.13	The leakage current test of 16.2 is applied in addition to the electric strength test of 16.3		N/A
Q	ANNEX Q (INFORMATIVE) SEQUENCE OF TESTS FOR THE EVALUATION OF ELECTRONIC CIRCUITS		P
	Description of tests for appliances incorporating electronic circuits		P
R	ANNEX R (NORMATIVE) SOFTWARE EVALUATION		N/A
	Programmable electronic circuits requiring software incorporating measures to control the fault/error conditions specified in Table R.1 or R.2 validated in accordance with the requirements of this annex		N/A
R.1	Programmable electronic circuits using software		N/A



EN 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Programmable electronic circuits requiring software incorporating measures to control the fault/error conditions specified in Table R.1 or R.2 constructed so that the software does not impair compliance with the requirements of this standard		N/A
R.2	Requirements for the architecture		N/A
R.2.1	General		N/A
R.2.1.1	Programmable electronic circuits requiring software incorporating measures to control the fault/error conditions specified in Table R.1 or R.2 use measures to control and avoid software-related faults/errors in safety-related data and safety-related segments of the software		N/A
R.2.1.2	Programmable electronic circuits requiring software incorporating measures to control the fault/error conditions specified in Table R.2 have one of the following structures:		N/A
	- single channel with periodic self-test and monitoring		N/A
	- dual channel (homogenous) with comparison		N/A
	- dual channel (diverse) with comparison		N/A
	Programmable electronic circuits requiring software incorporating measures to control the fault/error conditions specified in Table R.1 have one of the following structures:		N/A
	- single channel with functional test		N/A
	- single channel with periodic self-test		N/A
	- dual channel without comparison		N/A
R.2.2	Measures to control faults/errors		N/A
R.2.2.1	When redundant memory with comparison is provided on two areas of the same component, the data in one area is stored in a different format from that in the other area		N/A
R.2.2.2	Programmable electronic circuits with functions requiring software incorporating measures to control the fault/error conditions specified in Table R.2 and that use dual channel structures with comparison, have additional fault/error detection means for any fault/errors not detected by the comparison		N/A



EN 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
R.2.2.3	For programmable electronic circuits with functions requiring software incorporating measures to control the fault/error conditions specified in Table R.1 or R.2, means are provided for the recognition and control of errors in transmissions to external safety-related data paths		N/A
R.2.2.4	For programmable electronic circuits with functions requiring software incorporating measures to control the fault/error conditions specified in Table R.1 or R.2, the programmable electronic circuits incorporate measures to address the fault/errors in safety-related segments and data indicated in Table R.1 and R.2 as appropriate		N/A
R.2.2.5	For programmable electronic circuits with functions requiring software incorporating measures to control the fault/error conditions specified in Table R.1 or R.2, detection of a fault/error occurs before compliance with clause 19 is impaired		N/A
	For appliances intended for remote communication through public networks, where normative Annex U is applicable as determined by 22.62, detection of a fault/error occurs before compliance with normative Annex U is impaired		N/A
R.2.2.6	The software is referenced to relevant parts of the operating sequence and the associated hardware functions		N/A
R.2.2.7	Labels used for memory locations are unique		N/A
R.2.2.8	The software is protected from user alteration of safety-related segments and data		N/A
R.2.2.9	Software and safety-related hardware under its control is initialized and terminates before compliance with clause 19 is impaired		N/A
	For appliances intended for remote communication through public networks where normative Annex U is applicable as determined by 22.62, the software and safety-related hardware under its control is initialized and terminates before compliance with normative Annex U is impaired		N/A
R.3	Measures to avoid errors		N/A
R.3.1	General		N/A



EN 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
	For programmable electronic circuits with functions requiring software incorporating measures to control the fault/error conditions specified in Table R.1 or R.2, the following measures to avoid systematic faults in the software are applied		N/A
	Software that incorporates measures used to control the fault/error conditions specified in Table R.2 is inherently acceptable for software required to control the fault/error conditions specified in Table R.1		N/A
R.3.2	Specification		N/A
R.3.2.1	Software safety requirements:	Software Id:	N/A
	The specification of the software safety requirements includes the descriptions listed		N/A
R.3.2.2	Software architecture		N/A
R.3.2.2.1	The specification of the software architecture includes the aspects listed - techniques and measures to control software faults/errors (refer to R.2.2); - interactions between hardware and software; - partitioning into modules and their allocation to the specified safety functions; - hierarchy and call structure of the modules (control flow); - interrupt handling; - data flow and restrictions on data access; - architecture and storage of data; - time-based dependencies of sequences and data		N/A
R.3.2.2.2	The architecture specification is validated against the specification of the software safety requirements by static analysis		N/A
R.3.2.3	Module design and coding		N/A
R.3.2.3.1	Based on the architecture design, software is suitably refined into modules		N/A
	Software module design and coding is implemented in a way that is traceable to the software architecture and requirements		N/A
	The module design specifies:		N/A
	- function(s)		N/A
	- interfaces to other modules		N/A
	- data		N/A



EN 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
R.3.2.3.2	Software code is structured		N/A
R.3.2.3.3	Coded software is validated against the module specification by static analysis		N/A
	The module specification is validated against the architecture specification by static analysis		N/A
R.3.3	Software validation		N/A
	The software is validated with reference to the requirements of the software safety requirements specification		N/A
	Compliance is checked by simulation of:		N/A
	- input signals present during normal operation		N/A
	- anticipated occurrences		N/A
	- undesired conditions requiring system action		N/A
R.3.4	Management items		N/A
R.3.4.1	Management of software versions		N/A
	A software version management system at the module level is put in place		N/A
R.3.4.2	Software modification		N/A
R.3.4.2.1	Software modifications are based on a modification request which details the following:		N/A
	- the hazards which may be affected		N/A
	- the proposed change		N/A
	- the reasons for change		N/A
R.3.4.2.2	An analysis is carried out to determine the impact of the proposed modification on functional safety		N/A
R.3.4.2.3	A detailed specification for the modification is generated including the necessary activities for verification and validation, such as a definition of suitable test cases		N/A
R.3.4.2.4	The modification is carried out as planned		N/A
R.3.4.2.5	The assessment of the modification is carried out based on the specified verification and validation activities, which may include:		N/A
	- a reverification of changed software modules		N/A
	- a reverification of affected software modules		N/A
	- a revalidation of the complete system		N/A
	All details of modification activities are documented		N/A
R.3.4.2.6	- a reverification of changed software modules		N/A



EN 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict



EN 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict

TABLE R.1 – GENERAL FAULT/ERROR CONDITIONS						
Component ^a	Fault/error	Acceptable measures ^{b, c}	Definitions	Document reference for applied measure	Document reference for applied test	Verdict
1 CPU 1.1 Registers	Stuck at	Functional test, or periodic self-test using either: – static memory test, or – word protection with single bit redundancy	H.2.16.5 H.2.16.6 H.2.19.6 H.2.19.8.2			
1.2 VOID						
1.3 Programme counter	Stuck at	Functional test, or periodic self-test, or independent time-slot monitoring, or logical monitoring of the programme sequence	H.2.16.5 H.2.16.6 H.2.18.10.4 H.2.18.10.2			
2 Interrupt handling and execution	No interrupt or too frequent interrupt	Functional test, or time-slot monitoring	H.2.16.5 H.2.18.10.4			
3 Clock	Wrong frequency (for quartz synchronized clock: harmonics/sub-harmonics only)	Frequency monitoring, or time slot monitoring	H.2.18.10.1 H.2.18.10.4			
4 Memory 4.1 Invariable memory	All single bit faults	Periodic modified checksum, or multiple checksum, or word protection with single bit redundancy	H.2.19.3.1 H.2.19.3.2 H.2.19.8.2			
4.2 Variable memory	DC fault	Periodic static memory test, or Word protection with single bit redundancy	H.2.19.6 H.2.19.8.2			



EN 60335-1						
Clause	Requirement + Test		Result - Remark			Verdict
4.3 Addressing (relevant to variable and invariable memory)	Stuck at	Word protection with single bit redundancy including the address	H.2.19.8.2			
5 Internal data path	Stuck at	Word protection with single bit redundancy	H.2.19.8.2			
5.1 VOID						
5.2 Addressing	Wrong address	Word protection with single bit redundancy including the address	H.2.19.8.2			
6 External communication 6.1 Data	Data corruption of up to Hamming distance 3	Word protection with multi-bit redundancy, or CRC – single word, or transfer redundancy, or protocol test	H.2.19.8.1 H.2.19.4.1 H.2.18.2.2 H.2.18.14			
6.2 Addressing	Wrong address	Word protection with multi-bit redundancy including the address, or CRC – single word including the address, or transfer redundancy, or protocol test	H.2.19.8.1 H.2.19.4.1 H.2.18.2.2 H.2.18.14			
6.3 Timing	Wrong point in time Wrong sequence	Time-slot monitoring, or scheduled transmission Logical monitoring, or time-slot monitoring, or scheduled transmission	H.2.18.10.4 H.2.18.18 H.2.18.10.2 H.2.18.10.4 H.2.18.18			
7 Input/output periphery	Fault conditions specified in 19.11.2	Plausibility check	H.2.18.13			
7.1 VOID						



EN 60335-1						
Clause	Requirement + Test		Result - Remark			Verdict
7.2 Analog I/O						
7.2.1 A/D and D/A converter	Fault conditions specified in 19.11.2	Plausibility check	H.2.18.13			
7.2.2 Analog multiplexer	Wrong addressing	Plausibility check	H.2.18.13			
8 VOID						
9 Custom chips ^d e.g. ASIC, GAL, gate array	Any output outside the static and dynamic functional specification	Periodic self-test	H.2.16.6			
<p>NOTE A Stuck-at fault model denotes a fault model representing an open circuit or a non-varying signal level. A DC fault model denotes a stuck-at fault model incorporating short circuits between signal lines.</p> <p>^a For fault/error assessment, some components are divided into their sub-functions. ^b For each sub-function in the table, the Table R.2 measure will cover the software fault/error. ^c Where more than one measure is given for a sub-function, these are alternatives. ^d To be divided as necessary by the manufacturer into sub-functions.</p>						

TABLE R.2 – SPECIFIC FAULT/ERROR CONDITIONS

Component ^a	Fault/error	Acceptable measures ^{b, c}	Definitions	Document reference for applied measure	Document reference for applied test	Verdict



EN 60335-1						
Clause	Requirement + Test		Result - Remark			Verdict
1 CPU 1.1 Registers	DC fault	Comparison of redundant CPUs by either: – reciprocal comparison – independent hardware comparator, or internal error detection, or redundant memory with comparison, or periodic self-tests using either – walkpat memory test – Abraham test – Transparent GALPAT test; or word protection with multi-bit redundancy, or static memory test and word protection with single bit redundancy	H.2.18.15 H.2.18.3 H.2.18.9 H.2.19.5 H.2.19.7 H.2.19.1 H.2.19.2.1 H.2.19.8.1 H.2.19.6 H.2.19.8.2			
1.2 Instruction decoding and execution	Wrong decoding and execution	Comparison of redundant CPUs by either: – reciprocal comparison – independent hardware comparator, or internal error detection, or periodic self-test using equivalence class test	H.2.18.15 H.2.18.3 H.2.18.9 H.2.18.5			
1.3 Programme counter	DC fault	Periodic self-test and monitoring using either: – independent time-slot and logical monitoring – internal error detection, or comparison of redundant functional channels by either: – reciprocal comparison – independent hardware comparator	H.2.16.7 H.2.18.10.3 H.2.18.9 H.2.18.15 H.2.18.3			



EN 60335-1						
Clause	Requirement + Test		Result - Remark			Verdict
1.4 Addressing	DC fault	Comparison of redundant CPUs by either: – reciprocal comparison – independent hardware comparator; or internal error detection; or periodic self-test using – a testing pattern of the address lines; or – a full bus redundancy – a multi bus parity including the address	H.2.18.15 H.2.18.3 H.2.18.9 H.2.16.7 H.2.18.22 H.2.18.1.1 H.2.18.1.2			
1.5 Data paths instruction decoding	DC fault and execution	Comparison of redundant CPUs by either: – reciprocal comparison, or – independent hardware comparator, or – internal error detection, or – periodic self-test using a testing pattern, or – data redundancy, or – multi-bit bus parity	H.2.18.15 H.2.18.3 H.2.18.9 H.2.16.7 H.2.18.2.1 H.2.18.1.2			
2 Interrupt handling and execution	No interrupt or too frequent interrupt related to different sources	Comparison of redundant functional channels by either – reciprocal comparison, – independent hardware comparator, or – independent time-slot and logical monitoring	H.2.18.15 H.2.18.3 H.2.18.10.3			
3 Clock	Wrong frequency (for quartz synchronized clock: harmonics/sub-harmonics only)	Frequency monitoring, or time-slot monitoring, or comparison of redundant functional channels by either: – reciprocal comparison – independent hardware comparator	H.2.18.10.1 H.2.18.10.4 H.2.18.15 H.2.18.3			



EN 60335-1						
Clause	Requirement + Test		Result - Remark			Verdict
4 Memory 4.1 Invariable memory	99,6 % coverage of all information errors	Comparison of redundant CPUs by either: – reciprocal comparison – independent hardware comparator, or redundant memory with comparison, or periodic cyclic redundancy check, either – single word – double word, or word protection with multi-bit redundancy	H.2.18.15 H.2.18.3 H.2.19.5 H.2.19.4.1 H.2.19.4.2 H.2.19.8.1			
4.2 Variable memory	DC fault and dynamic cross links	Comparison of redundant CPUs by either: – reciprocal comparison – independent hardware comparator, or redundant memory with comparison, or periodic self-tests using either: – walkpat memory test – Abraham test – transparent GALPAT test, or word protection with multi-bit redundancy	H.2.18.15 H.2.18.3 H.2.19.5 H.2.19.7 H.2.19.1 H.2.19.2.1 H.2.19.8.1			
4.3 Addressing (relevant to variable and invariable memory)	DC fault	Comparison of redundant CPUs by either: – reciprocal comparison, or – independent hardware comparator, or full bus redundancy testing pattern, or periodic cyclic redundancy check, either: – single word – double word, or word protection with multi-bit redundancy including the address	H.2.18.15 H.2.18.3 H.2.18.1.1 H.2.18.22 H.2.19.4.1 H.2.19.4.2 H.2.19.8.1			



EN 60335-1						
Clause	Requirement + Test		Result - Remark			Verdict
5 Internal data path 5.1 Data	DC fault	Comparison of redundant CPUs by either – reciprocal comparison – independent hardware comparator, or word protection with multi-bit redundancy including the address, or data redundancy, or testing pattern, or protocol test	H.2.18.15 H.2.18.3 H.2.19.8.1 H.2.18.2.1 H.2.18.22 H.2.18.14			
5.2 Addressing	Wrong address and multiple addressing	Comparison of redundant CPUs by: – reciprocal comparison – independent hardware comparator, or word protection with multi-bit redundancy, including the address, or full bus redundancy; or testing pattern including the address	H.2.18.15 H.2.18.3 H.2.19.8.1 H.2.18.1.1 H.2.18.22			
6 External communication 6.1 Data	Data corruption of up to Hamming distance 4	CRC – double word, or data redundancy or comparison of redundant functional channels by either – reciprocal comparison; or – independent hardware comparator	H.2.19.4.2 H.2.18.2.1 H.2.18.15 H.2.18.3			



EN 60335-1						
Clause	Requirement + Test		Result - Remark			Verdict
6.2 Addressing	Wrong address and multiple addressing	CRC – double word, including the address, or full bus redundancy of data and address, or comparison of redundant communication channels by either: – reciprocal comparison; or – independent hardware comparator	H.2.19.4.2 H.2.18.1.1 H.2.18.15 H.2.18.3			
6.3 Timing	Wrong point in time Wrong sequence	Time-slot and logical monitoring, or comparison of redundant communication channels by either: – reciprocal comparison; or – independent hardware comparator Time-slot and logical monitoring, or comparison of redundant communication channels by either: – reciprocal comparison; or – independent hardware comparator	H.2.18.10.3 H.2.18.15 H.2.18.3 H.2.18.10.3 H.2.18.15 H.2.18.3			
7 Input/output periphery 7.1 Digital I/O	Fault conditions specified in 19.11.2	Comparison of redundant CPUs by either: – reciprocal comparison – independent hardware comparator, or input comparison, or multiple parallel outputs, or output verification, or testing pattern, or code safety	H.2.18.15 H.2.18.3 H.2.18.8 H.2.18.11 H.2.18.12 H.2.18.22 H.2.18.2			



EN 60335-1						
Clause	Requirement + Test		Result - Remark			Verdict
7.2 Analog I/O 7.2.1 A/D and D/A converter	Fault conditions in 19.11.2	Comparison of redundant CPUs by either: – reciprocal comparison – independent hardware comparator, or input comparison, or multiple parallel outputs, or output verification, or testing pattern	H.2.18.15 H.2.18.3 H.2.18.8 H.2.18.11 H.2.18.12 H.2.18.22			
7.2.2 Analog multiplexer	Wrong addressing	Comparison of redundant CPUs by either: – reciprocal comparison – independent hardware comparator, or input comparison or testing pattern	H.2.18.15 H.2.18.3 H.2.18.8 H.2.18.22			
8 Monitoring devices and comparators	Any output outside the static and dynamic functional specification	Tested monitoring, or redundant monitoring and comparison, or error recognizing means	H.2.18.21 H.2.18.17 H.2.18.6			
9 Custom chips ^d e.g. ASIC, GAL, gate array	Any output outside the static and dynamic functional specification	Periodic self-test and monitoring, dual channel (diverse) with comparison, or error recognizing means	H.2.16.7 H.2.16.2 H.2.18.6			

NOTE A DC fault model denotes a stuck-at fault model incorporating short circuits between signal lines.

- ^a For fault/error assessment, some components are divided into their sub-functions.
- ^b For each sub-function in the table, the software measure will cover the Table R.1 fault/error.
- ^c Where more than one measure is given for a sub-function, these are alternatives.
- ^d To be divided as necessary by the manufacturer into sub-functions.

S	ANNEX S (INFORMATIVE) GUIDANCE FOR THE APPLICATION OF THIS STANDARD ON MEASUREMENT OF POWER INPUT AND CURRENT BASED ON THE REQUIREMENTS OF 10.1 AND 10.2 CONCERNING THE REPRESENTATIVE PERIOD	N/A
----------	--	-----



EN 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Flowchart giving guidance on measurement of power input and current concerning the representative period		N/A
T	ANNEX T (NORMATIVE) UV-C RADIATION EFFECT ON NON-METALLIC MATERIALS		N/A
	This annex provides requirements for non-metallic materials subject to direct or reflected UV-C radiation (100 nm to 280 nm) exposure and whose mechanical and electrical properties are relied upon for compliance with this standard		N/A
	This annex does not apply to glass, ceramic and similar materials		N/A
	The conditioning and tests are carried out on non-metallic material specimens prepared according to the relevant standard for the test method		N/A
	The conditioning apparatus and test procedure are as specified in ISO 4892-1 and ISO 4892-2		N/A
	Modifications to the clauses of ISO 4892-1:2016:		N/A
5.1	Irradiance		N/A
5.1.1	The UV-C emitter is a low pressure mercury lamp with a quartz envelope having a continuous spectral irradiance of 10 W/m ² at 254 nm		N/A
5.2	Temperature		N/A
5.2.5	The black-panel temperature is 63 °C ± 3 °C		N/A
5.3	Humidity and wetting		N/A
5.3.1	Humidification of the chamber air is specified in part 2 when necessary		N/A
9	Test report		N/A
	This clause is not applicable		N/A
	Modifications to the clauses of ISO 4892-2:2013:		N/A
7	Procedure		N/A
7.1	General		N/A
	At least three test specimens of each non-metallic material providing mechanical support or impact resistance are exposed in each run		N/A
	Ten samples of the insulated internal wiring are exposed in each run		N/A
	When the internal wiring is provided in more than one colour, the colour having the heaviest organic pigment loading is used		N/A
7.2	Mounting the test specimens		N/A



EN 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
	The specimens are attached to the specimen holders such that they are not subject to any applied stress		N/A
7.3	Exposure		N/A
	Before placing the specimens in the test chamber, the apparatus is operating under the specified exposure conditions and programmed to operate continuously, conditions are maintained throughout the exposure		N/A
7.4	Measurement of radiant exposure		N/A
	If used, a radiometer is mounted and calibrated such that it measures the irradiance at the exposed surface of the test specimen		N/A
7.5	Determination of changes in properties after exposure		N/A
	The non-metallic material properties and test methods for parts providing mechanical support or impact resistance are specified in Table T.1		N/A
	The non-metallic material properties and test method for electrical insulation of internal wiring are specified in Table T.2		N/A
8	Exposure report		N/A
	This clause is not applicable		N/A
U	ANNEX U (NORMATIVE) APPLIANCES INTENDED FOR REMOTE COMMUNICATION THROUGH PUBLIC NETWORKS		N/A
	The measures given in this annex are intended to avoid unauthorized access and the effects of transmission failures via remote communication through public networks, where compliance with this standard could be impaired		N/A
	However, in general, it does not cover aspects concerning confidentiality of data and consumer privacy		N/A
U.1	Terms and definitions		N/A
U.1.1	Definitions relating to remote functionality		N/A
	Definitions used in this appendix as described		N/A
U.2	Marking and instructions		N/A
U.2.1	If there is provision for software download, instructions are provided on how or where to obtain the unique name or code given by the manufacturer, that identifies the current version of the software running in the appliance		N/A



EN 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
	The instructions also include the necessary steps the user must follow for the software update procedure		N/A
U.3	Construction		N/A
U.3.1	Software enabling communication with a public network is partitioned into modules separate from software which is necessary to comply with the other requirements of this standard		N/A
U.3.2	Remote communication is established, implemented and terminated by the appliance via software that provides:		N/A
	- data integrity protection concerning:		N/A
	data corruption		N/A
	address corruption		N/A
	wrong timing or sequence		N/A
	permanent "auto-sending" or repetition		N/A
	interruption of data transfer		N/A
	- means to detect and respond to communication in which, for any reason, a message being communicated is incomplete, truncated, contains errors or has the correct format but delivers information that is outside the range expected for that type of message		N/A
	- means to detect and respond to communication in which, for any reason, a message being communicated is incomplete, truncated, contains errors or has the correct format but delivers information that is outside the range expected for that type of message		N/A
	- measures to control the fault/error conditions specified in Table R.1		N/A
U.3.3	Measures provided to protect against hazards arising from the reception of messages from several sources simultaneously or sequentially		N/A
U.3.4	Remote communication is not enabled prior to authorization		N/A
	Authorization is based on authentication using cryptographic techniques to ensure the identity of both parties		N/A
	For the purposes of this requirement, communication between two entities for preparation of the authentication and authorization process is not considered remote communication		N/A



EN 60335-1			
Clause	Requirement + Test	Result - Remark	Verdict
U.3.5	Measures are taken to prevent unauthorized access and to detect transmission faults/errors in the remote communication		N/A
U.3.6	The safe operation of an appliance does not depend on remote communication		N/A
	In case of doubt, remote communication rendered inoperative for the relevant tests of this standard		N/A
U.3.7	Cryptographic techniques are implemented to provide data integrity protection once authorization for remote communication is established		N/A
	Cryptographic techniques employed are part of the appliance including its accessories, do not rely upon part of the router or similar data transmission device, and are performed prior to transmission		N/A
U.3.8	Provisions are taken to ensure that software updates provided by the manufacturer and transmitted to the appliance via remote communication are verified prior to its installation:		N/A
	- against corruption through communication		N/A
	- that the software version is compatible with the appliance for which the software version was designed		N/A
	The software which performs the above-mentioned checks contains measures to control the fault/error conditions specified in Table R.1		N/A
U.3.9	Permission for each installation of software in the appliance is given by the person responsible for the appliance		N/A
	User activation of a mode that enables automatic software updates is permitted		N/A
U.3.10	The installation of software does not impair compliance with the requirements of this standard during or after installation		N/A



10.1	TABLE: Power input deviation					P
Input deviation of/at:	P rated (W)	P measured (W)	ΔP (W, %)	Required ΔP (W, %)	Remark	
110VAC/50Hz (AC/DC adapter)	36	34	-5.6%	$\pm 10\%$	Normal work	
240VAC/50Hz (AC/DC adapter)	36	34	-5.6%	$\pm 10\%$		
Supplementary information:						

10.2	TABLE: Current deviation					N/A
Current deviation of/at:	I rated (A)	I measured (A)	ΔI (A, %)	Required ΔI (A, %)	Remark	
--	--	--	--	--	--	
Supplementary information:						

11.8	TABLE: Heating test				P
	Test voltage (V).....	See below			—
	Ambient (°C).....	25			—
Thermocouple locations:	Max. temperature rise measured, ΔT (K)				Max. temperature rise limit, ΔT (K)
	94V/60Hz (Propeller Charger)		254.4V/50Hz (Propeller Charger)		
Enclosure	34.9	--	34.4	--	Cl. 30
Motor winding	64.4	--	62.4	--	70
Motor core	59.3	--	57.7	--	70
Internal wire	30.4	--	28.9	--	40
Enclosure inside near Motor top	42.5	--	41.1	--	Cl. 30
Enclosure inside near Motor bottom	44.0	--	42.8	--	Cl. 30
Enclosure outside near Motor top	29.4	--	27.3	--	45
Enclosure outside near Motor bottom	31.1	--	29.3	--	45
Test corner	19.7	--	18.0	--	50
Supplementary information: 1. Thermocouple method used.					



13.2	TABLE: Leakage current		P
	Heating appliances: 1.15 x rated input (W)...:	--	—
	Motor-operated and combined appliances: 1.06 x rated voltage (V).....:	240VAC/50Hz (AC/DC adapter)	—
Leakage current between:		I (mA)	Max. allowed I (mA peak)
Input & accessible plastic enclosure		0.008 mA peak	0.35
Supplementary information:			

13.3	TABLE: Dielectric strength		P
Test voltage applied between:		Test potential applied (V)	Breakdown / flashover (Yes/No)
Input and external enclosure with metal foil (RI)		500	No
Supplementary information:			

14	TABLE: Transient overvoltages					N/A
Clearance between:	CI (mm)	Required CI (mm)	Rated impulse voltage (V)	Impulse test voltage (V)	Flashover (Yes/No)	
Supplementary information:						



16.2	TABLE: Leakage current		P
	Single phase appliances: 1.06 x rated voltage (V).....:	240VAC/50Hz (AC/DC adapter)	—
	Three phase appliances 1.06 x rated voltage divided by $\sqrt{3}$ (V).....:	--	—
Leakage current between:		I (mA)	Max. allowed I (mA)
Input & accessible plastic enclosure		0.005mA	0.25
Supplementary information:			

16.3	TABLE: Dielectric strength		P
Test voltage applied between:		Test potential applied (V)	Breakdown / flashover (Yes/No)
Input and external enclosure with metal foil (RI) @		AC 500	No
Supplementary information:			



17	TABLE: Overload protection		P
Thermocouple locations:		Max. temperature rise measured, ΔT (K)	Max. temperature rise limit, ΔT (K)
Motor winding		88.4	125
Motor core		82.4	125
Internal wire		42.0	55
Enclosure outside near Motor top		42.7	Ref.
Enclosure outside near Motor bottom		45.9	Ref.
Test corner		27.9	Ref.
Supplementary information:			

17	TABLE: Short-circuit protection			P
Test voltage (V) :				—
R = One Rated Voltage (V) :				
U = Upper limit of range (V) :				
L = Lower limit of range* (V) :				
Frequency (Hz) :				
Ambient (°C) :				—
Thermocouple locations**		Max. temperature rise measured, ΔT (K)		Max. temperature rise limit, ΔT (K)
		R	U	L
				*
				*
				*
				*
Supplementary information: * Only when a protection system actuates at Upper limit of the range ** If a thermocouple is used to measure winding temperature the insulation class shall be reported next to the ΔT (K) limit				
If the resistance method is used to measure winding temperature				
Ambient, t_1 (°C) :				—
Ambient, t_2 (°C) :				—
Temperature rise of winding	R_1 (Ω)	R_2 (Ω)	ΔT (K)	Max. ΔT (K)
Supplementary information: Test voltage for the results reported =				



19		Abnormal operation conditions					P	
Operational characteristics			YES/NO	Operational conditions				
Are there electronic circuits to control the appliance operation?			YES	Input: 240VAC/50Hz (AC/DC adapter)				
Are there “OFF” or “stand-by” position?			NO	--				
The unintended operation of the appliance results in dangerous malfunction?			NO	--				
Subclause	Operating conditions description	Test results description	PEC description	EMP 19.11.4	Software type required	19.11.3 PEC	Final result	
19.2	N/A	N/A	N/A	N/A	N/A	N/A	N/A	
19.3	N/A	N/A	N/A	N/A	N/A	N/A	N/A	
19.4	N/A	N/A	N/A	N/A	N/A	N/A	N/A	
19.4	N/A	N/A	N/A	N/A	N/A	N/A	N/A	
19.5	N/A	N/A	N/A	N/A	N/A	N/A	N/A	
19.6	N/A	N/A	N/A	N/A	N/A	N/A	N/A	
19.7	N/A	N/A	N/A	N/A	N/A	N/A	N/A	
19.8	N/A	N/A	N/A	N/A	N/A	N/A	N/A	
19.9	N/A	N/A	N/A	N/A	N/A	N/A	N/A	
19.10	N/A	N/A	N/A	N/A	N/A	N/A	N/A	
19.11.2	See clause 19.11.2	No hazard was found.	N/A	N/A	N/A	N/A	Pass	
19.11.4.8	N/A	N/A	N/A	N/A	N/A	N/A	N/A	
19.10X	N/A	N/A	N/A	N/A	N/A	N/A	N/A	
Supplementary information:								



19.7	TABLE: Abnormal operation, locked rotor/moving parts					P
	Test voltage (V) :	240VAC/50Hz (AC/DC adapter)				—
	Ambient, t₁ (°C) :	23.2				—
	Ambient, t₂ (°C) :	23.9				—
	Temperature rise of winding	R₁ (Ω)	R₂ (Ω)	ΔT (K)	T (°C)	Max. T (°C)
	Motor	--	--	--	135.9	240
Supplementary information:						

19.7	TABLE: Abnormal operation, locked rotor/moving parts					P
	Test voltage (V) :					—
	Ambient, t₁ (°C) :					—
	Ambient, t₂ (°C) :					—
	Temperature rise of winding	R₁ (Ω)	R₂ (Ω)	ΔT (K)	T (°C)	Max. T (°C)
	--	--	--	--	--	--
Supplementary information:						

19.9	TABLE: Abnormal operation, running overload					P
	Test voltage (V) :					—
	Ambient, t₁ (°C) :					—
	Ambient, t₂ (°C) :					—
	Temperature rise of winding	R₁ (Ω)	R₂ (Ω)	ΔT (K)	T (°C)	Max. T (°C)
	--	--	--	--	--	--
Supplementary information:						



19.11.2 and 19.13	TABLE: fault condition tests					P
	ambient temperature (°C)		25°C, if no specified			—
	model/type of power supply.....		See page 2			—
	manufacturer of power supply		See page 2			—
	rated markings of power supply.....		See page 2			—
component No.	fault	test voltage (V)	test time	fuse No.	fuse current (A)	result
Output terminal	SC	220	10 min	--	--	Unit shut down immediately, recoverable, no hazard.

Note(s):

1. In fault column, SC=short-circuited, OC=open-circuited.
2. All the test samples have passed the Hi-Pot test between primary and secondary (3050AC, 1 min).
3. The appliance didn't emit flames, molten metal, or poisonous or ignitable gas in hazardous amounts and temperature rises not exceed the values shown in table 19 during the tests.
4. All tests were considered in AC 94V also, same result generated.
5. # means all types of current fuse listed in table 24.1 are considered for test and same result came out.



21.1	TABLE: Impact resistance			P
Impacts per surface	Surface tested	Impact energy (Nm)	Comments	
Three blows	Top enclosure	0.5	No hazards	
Three blows	Right side enclosure	0.5	No hazards	
Three blows	Left side enclosure	0.5	No hazards	
Three blows	Bottom enclosure	0.5	No hazards	
Three blows	Front enclosure	0.5	No hazards	
Three blows	Rear enclosure	0.5	No hazards	
Supplementary information:				



24.1	TABLE: Critical components information					P
Object / part No.	Manufacturer/ trademark	Type / model	Technical data	Standard	Mark(s) of conformity ¹⁾	
European plug	JIANGMEN GOMENTECH ELECTRICAL CO.,LTD.	GM-01	250Vac,16A	/	40023785	
European plug	CIXI WANNENG ELECTRON CO.,LTD.	D003	250Vac,16A	/	40044952	
European plug	CiXi Yuantong Cable Appliance Co.,Ltd	YT-3	250Vac,16A	/	40052645	
Power cord	CiXi Yuantong Cable Appliance Co.,Ltd	/	H03VV-F 3G 0.5mm ²	/	40052645	
Power cord	Zhongshan Ke Jin Power Supply Cord Co.,Ltd	/	H03VV-F 3x0.5mm ²	/	40013045	
Power cord	CIXI WANNENG ELECTRON CO.,LTD.	/	H03VV-F 3x0.5mm ²	/	40053986	
Push-button Switch	ZHEJIANG NICHANG ELECTRONIC CO.,LTD	KDC-A10	8(5)A T125/55	/	R 50474113	
Temperatursicherung(thermal Link)	The Third radio factory of yangzhong	RY192	250V~ 50/60Hz 10A Tf192℃	/	R 50311907	
Temperatursicherung(thermal Link)	ZhongShan Qilin Electronics Co.,LTD	QLF188	250V~ 50/60Hz 10A Tf192℃	/	B090735 0004	
Temperatursicherung(thermal Link)	Shanghai Xinyuan Electronic Corporation	RY192-1/R Y192	250V~ 50Hz 10A Tf192/TF194	/	R 50056552	
Thermostat	Zhongshan Huilong Electrical Co.,Ltd	KSD301	10A 250~ 130℃	/	40034938	
Internal leads	CIXI SHUANGHONG WIRE CO.,LTD.	/	H05S-K 1*0.5/0.75mm ² H05SJ-K 1*0.5/0.75mm ²	/	40017324	
Internal leads	Cixi Shenhong Wires Co.,Ltd.	/	H05S-K 1*0.5/0.75mm ² H05SJ-K 1*0.5/0.75mm ²	/	40049048	



Internal leads	CIXI SHUANGHONG WIRE CO.,LTD.	/	3122 300V 200°C 18/20/22/24AW G	/	E333292
内部引线	Cixi Shenhong Wires Co.,Ltd.	/	3122 300V 200°C 18/20/22/24AW G	/	E503737
Internal leads	Zhongshan City Ming Jiang Hardware & Electrical Co.,Ltd.	MH	390W 220- 240VAC 50/60Hz	/	CTIC345245 1060116307 AC
Supplementary information: 1) Provided evidence ensures the agreed level of compliance. See OD-2039. License available upon request					



28.1	TABLE: Threaded part torque test			P
Threaded part identification	Diameter of thread (mm)	Column number (I, II, or III)	Applied torque (Nm)	
Enclosure	2.8	II	0.4	
Supplementary information:				

29	TABLE: Clearance and creepage distance measurements					N/A
Clearance cl and creepage distance dcr at/of:	Up (V)	U r.m.s. (V)	Required cl (mm)	cl (mm)	Required dcr (mm)	dcr (mm)
--	--	--	--	--	--	--
Supplementary information:						

30.1	TABLE: Ball pressure test of thermoplastics			P
Allowed impression diameter (mm).....:				—
Object/ Part No./ Material	Manufacturer/ trademark	Test temperature (°C)	Impression diameter (mm)	
Plastic enclosure	SABIC INNOVATIVE PLASTICS US L L C	125	1.1	
Supplementary information:				

30.2	TABLE: Resistance to heat and fire - Glow wire tests						P	
Object/ Part No./ Material	Manufacturer / trademark	Glow wire test (GWT); (°C)					Verdict	
		550	650		750			850
			te	ti	te	ti		
Enclosure / 940(f1)	SABIC INNOVATIVE PLASTICS US L L C	None	--	--	None	x	x	Pass
Object/ Part No./ Material	Manufacturer / trademark	Glow-wire flammability index (GWFI), °C				GW ignition temp. (GWIT), °C		Verdict
		550	650	750	850	675	775	
--	--	--	--	--	--	--	--	--
The test specimen passed the glow wire test (GWT) with no ignition [(te – ti) ≤ 2s] (Yes/No) :							Yes	
If no, then surrounding parts passed the needle-flame test of annex E (Yes/No).....:							N/A	
The test specimen passed the test by virtue of most of the flaming material being withdrawn with the glow-wire (Yes/No)?.....:							Yes	



Ignition of the specified layer placed underneath the test specimen (Yes/No).....:	N/A
Supplementary information: - 550 °C GWT not relevant (or applicable) to parts of material classified at least HB40 or if relevant HBF - The GWIT pre-selection option, the 850 °C GWFI pre-selection option, and the 850 °C GWT are not relevant (or applicable) for attended appliances	

30.2/30.4 TABLE: Needle- flame test (NFT)					P
Object/ Part No./ Material	Manufacturer/ trademark	Duration of application of test flame (ta); (s)	Ignition of specified layer Yes/No	Duration of burning (tb) (s)	Verdict
PCB	See table 24.1	30	No	0	Pass
Supplementary information: - NFT not relevant (or applicable) for Parts of material classified as V-0 or V-1 - NFT not relevant (or applicable) for Base material of PCBs classified as V-0 or if relevant VTM-0					


Description: Overall view of EUT



Description: Overall view of EUT



Description: Overall view of EUT

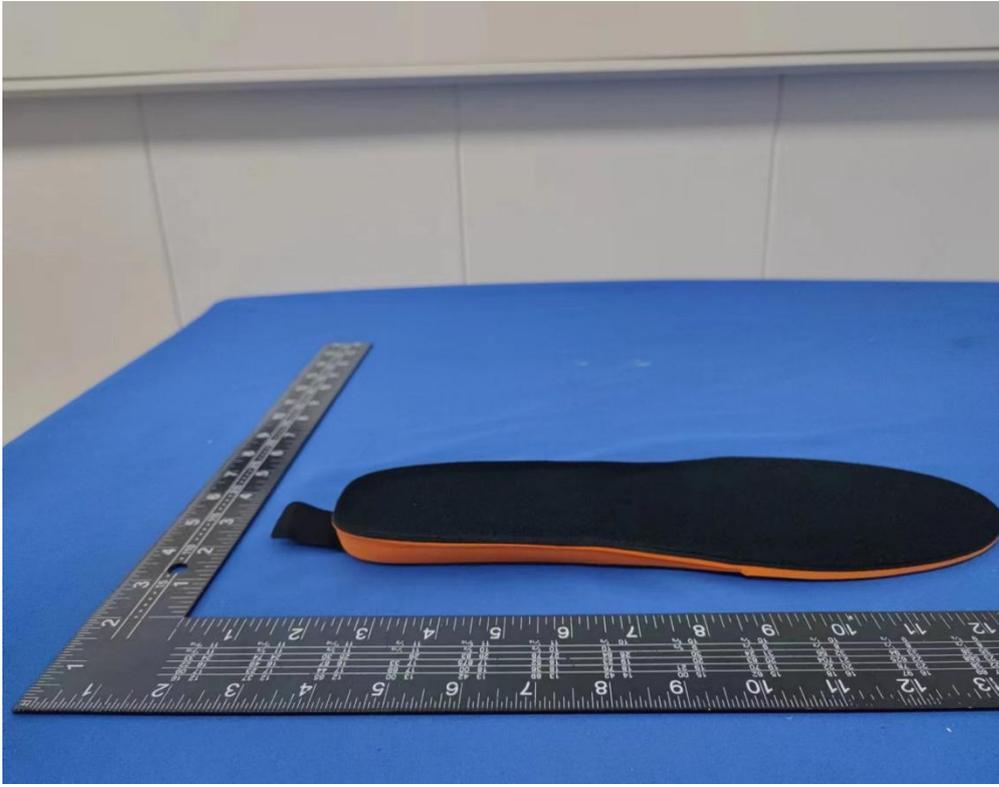


Description: Overall view of EUT




Description: Interior view




Description: Interior view

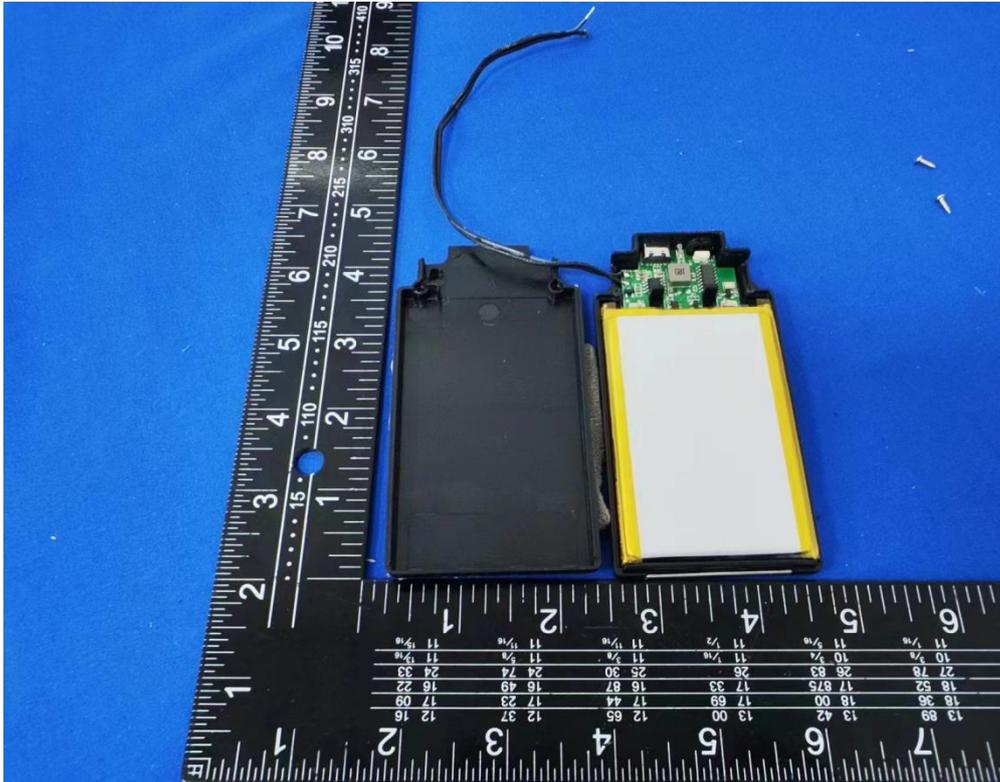

Description: PCB

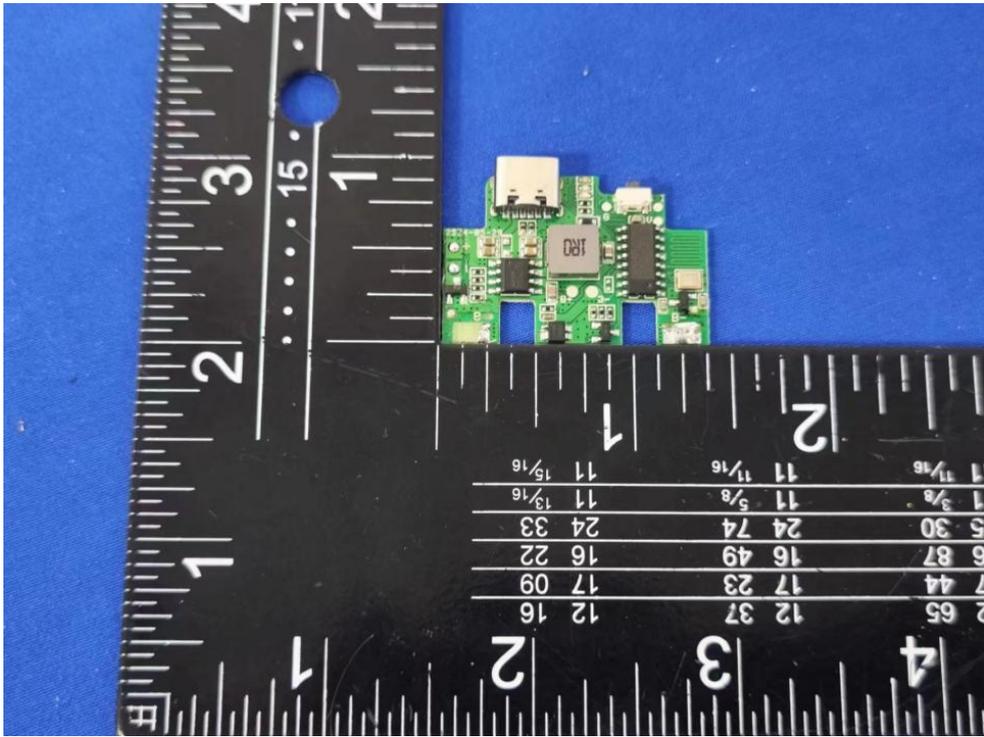

Description: PCB

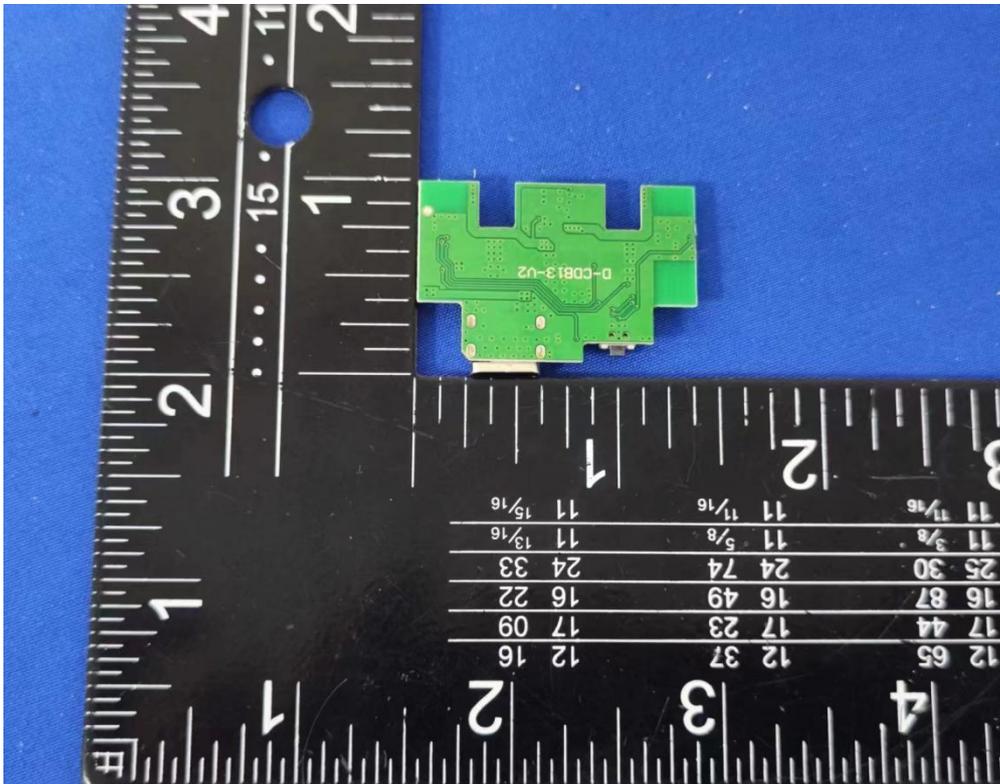

※※※※※END OF THE REPORT※※※※※



Certificate No. FCS202406188CA01
Product HEATING INSOLES
Brand Name N/A
Model(s) No. SP-XJ19
Series Model SP-XJ14,SP-XJ15,SP-XJ05,SP-XJ16,SP-XJ17
SP-XJ18,SP-XJ20,SP-XJ21,SP-XJ22
Holder ShenZhen Diode Optoelectric technology co., LTD
Address 907, Longhua Haicheng Business Building, Shenzhen
Manufacturer Dongguan City fifty-five degrees intelligent technology LTD
Address Jiangrui High Salary Science Park, Liangping West Road, Liaobu Town, Dongguan City, Guangdong Province
Report No. FCS202406188A01 FCS202406188E0
FCS202406188H01 FCS202406188W01

TEST STANDARDS:

EN IEC 55014-1:2021
EN IEC 55014-2:2021
ETSI EN 301 489-1 V2.2.3 (2019-11)
ETSI EN 301 489-3V2.3.2 (2023-01)(2020-09)
ETSI EN 300 328 V2.2.2
EN 60335-1:2012/A15:2021
EN 62479: 2010

The applicant of the certificate is authorized to use this certificate in connection with EC declaration of conformity to the Directive. The certificate is only applicable to the equipments described above. The submitted sample of the above equipment has been tested and found to comply with the following European Directive:

CE_RED Directive - 2014/53/EU



Approved by: Jack Wang
July 10, 2024
Jack Wang/Managerial



The statement is based on a single evaluation of the sample of above mentioned product(s). It does not imply an assessment of the whole production.

Dongguan Funas Testing Technology Co., Ltd.

Tel: 0769-27280901

<http://www.fcs-lab.com>