



TEST REPORT

Applicant : Dongguan Weinimei Electronic Clothing Co., Ltd.
Address : 3rd Floor, No. 62 Hudong Road, Shatian Town, Dongguan City,
: Guangdong Province
Manufacturer : Shenzhen Outianxiang Technology Co., Ltd.
3rd Floor, Building 4, Hengmingzhu Science and Technology
Address : Industrial Park, Xinqiao Tongfu Industrial Zone, Gonghe Community,
Shajing Street, Bao'an District, Shenzhen

Report on the submitted samples said to be:

Sample Name	: 3D massage foot pad
Trade Mark	: Beauty Body
Tested model	: VNM-1031
Series models	: OTX-258, OTX-1101, VNM-523
Testing Period	: 2024-06-17 to 2024-06-26
Date of issue	: 2024-06-26
Results	: Please refer to next page(s).

TEST REQUEST

According to the customer's request, based on the performed tests on submitted sample, the result of Lead, Cadmium, Mercury, Hexavalent Chromium, PBBs, PBDEs, Dibutyl Phthalate(DBP), Benzylbutyl Phthalate(BBP), Bis(2-ethylhexyl) Phthalate(DEHP), Diisobutyl phthalate(DIBP) content comply with the limit as set of RoHS Directive (EU) 2015/863 amending Annex II to Directive 2011/65/EU.

CONCLUSION

Pass

Signed for and on behalf of LC



**Results:****A. EU RoHS Directive 2011/65/EU and its amendment directives on XRF**

Test method: With reference to IEC 62321-3-1:2013, Screening by X-ray Fluorescence Spectroscopy (XRF)

Seq. No.	Tested Part(s)	Results					
		Cd	Pb	Hg	Cr ^{VI}	Br ^{IV}	
		PBBs	PBDEs				
1	Lithium Battery	BL	BL	BL	BL	BL	BL
2	EVA	BL	BL	BL	BL	BL	BL
3	PCB	BL	BL	BL	BL	BL	BL
4	Shell	BL	BL	BL	BL	BL	BL
5	Switch button	BL	BL	BL	BL	BL	BL
6	Tail cap	BL	BL	BL	BL	BL	BL
7	Cloth	BL	BL	BL	BL	BL	BL
8	Silicone cover	BL	BL	BL	BL	BL	BL
9	Wire	BL	BL	BL	BL	BL	BL
10	Solder	BL	BL	BL	BL	/	/
11	Screw	BL	BL	BL	BL	/	/

Note:

(1) Results were obtained by XRF for primary screening, and further chemical testing by ICP (for Cd, Pb, Hg), UV-Vis (for Cr(VI)) and GC-MS (for PBBs, PBDEs) are recommended to be performed, if the concentration exceeds the below warning value according to IEC 62321-3-1:2013.



Element	Unit	Non-metal	Metal	Composite Material
Cd	mg/kg	BL≤70-3σ<X <130+3σ≤OL	BL≤70-3σ<X <130+3σ≤OL	BL≤50-3σ<X <150+3σ≤OL
Pb	mg/kg	BL≤700-3σ<X <1300+3σ≤OL	BL≤700-3σ<X <1300+3σ≤OL	BL≤500-3σ<X <1500+3σ≤OL
Hg	mg/kg	BL≤700-3σ<X <1300+3σ≤OL	BL≤700-3σ<X <1300+3σ≤OL	BL≤500-3σ<X <1500+3σ≤OL
Cr	mg/kg	BL≤700-3σ<X	BL≤700-3σ<X	BL≤500-3σ<X
Br	mg/kg	BL≤300-3σ<X	--	BL≤250-3σ<X

Note:

BL = Below Limit

OL = Over Limit

X = Inconclusive

- (2) The XRF screening test for RoHS elements – The reading may be different to the actual content in the sample be of non-uniformity composition.
- (3) The maximum permissible limit is quoted from the document 2015/863/EC amending RoHS directive 2011/65/EU:
- (4) ▼ =For restricted substances PBBs and PBDEs, the results show the total Br content; The restricted substance was Cr(VI), and the results showed the total Cr content



RoHS Restricted Substances	Maximum Concentration Value (mg/kg) (by weight in homogenous materials)
Cadmium (Cd)	100
Lead (Pb)	1000
Mercury (Hg)	1000
Hexavalent Chromium (Cr(VI))	1000
Polybrominated biphenyls (PBBs)	1000
Polybrominated diphenylethers (PBDEs)	1000
Dibutyl Phthalate(DBP)	1000
Benzylbutyl Phthalate(BBP)	1000
Bis(2-ethylhexyl) Phthalate(DEHP)	1000
Diisobutyl phthalate(DIBP)	1000

Disclaimers:

This XRF Screening report is for reference purposes only. The applicant shall make its/his/her own judgment as to whether the information provided in this XRF screening report is sufficient for its/his/her purposes.

The result shown in this XRF screening report will differ based on various factors, including but not limited to, the sample size, thickness, area, surface flatness, equipment parameters and matrix effect (e.g. plastic, rubber, metal, glass, ceramic etc.). Further wet chemical pre-treatment with relevant chemical equipment analysis are required to obtain quantitative data.



B. EU RoHS Directive 2011/65/EU and its amendment Directives 2015/863/EU on Lead, Cadmium, Mercury, Hexavalent Chromium, PBBs, PBDEs, DBP, BBP, DEHP, DIBP content.

Test method:

Lead(Pb) & Cadmium(Cd) Content:

With reference to IEC 62321-5:2013, by acid digestion and analysis was performed by inductively coupled plasma atomic emission spectrometer (ICP-OES)

Mercury(Hg) Content:

With reference to IEC 62321-4:2013+AMD1:2017 CSV, by acid digestion and analysis was performed by inductively coupled plasma atomic emission spectrometer (ICP-OES)

Hexavalent Chromium(Cr⁶⁺) Content:

With reference to IEC 62321-7-1:2015 or IEC 62321-7-2:2017, by alkaline digestion and analysis was performed by UV-visible spectrophotometer (UV-Vis)

PBBs & PBDEs Content:

With reference to IEC 62321-6:2015, by solvent extraction and analysis was performed by gas chromatographic-mass spectrometer (GC-MS)

BBP DBP DEHP & DIBP Content:

With reference to IEC 62321-8:2017, by solvent extraction and analysis was performed by gas chromatographic-mass spectrometer (GC-MS)



Note:

- #1 According to RoHS directive 2011/65/EU and its amendments, Lead is exempted in glass of cathode ray tubes, electronic components and fluorescent tubes.
- #2 According to RoHS directive 2011/65/EU and its amendments, Lead is exempted in electronic ceramic parts (e.g. piezoelectronic devices).
- #3 According to RoHS directive 2011/65/EU and its amendments, Lead is exempted as an alloying element in Copper containing up to 4% (4000ppm) by weight.
- #4 According to RoHS directive 2011/65/EU and its amendments, Lead is exempted in high melting temperature type solders (i.e. lead-based alloys containing 85 % by weight or more lead).
- #5 According to the statement provided by the customer, according to RoHS directive 2011/65/EU and its amendments, Lead is exempted as an alloying element in Aluminum containing up to 0.4% (4000ppm) by weight.
- #6 According to the statement provided by the customer, according to RoHS directive 2011/65/EU and its amendments, Cadmium and its compounds in electrical contact is exempted.
- #7 According to the statement provided by the customer, according to RoHS directive 2011/65/EU and its Amendments, Lead is exempted in steel for machining purposes and in galvanised steel containing up to 0.35% (3500ppm) by weight.


**1) The test results of DBP、BBP、DEHP & DIBP**

Item	Unit	MDL	Results						Limit
			2	4	5	6	8	9	
Dibutyl Phthalate(DBP)	mg/kg	50	N.D.	N.D.	N.D.	N.D.	N.D.	N.D.	1000
Benzylbutyl Phthalate(BBP)	mg/kg	50	N.D.	N.D.	N.D.	N.D.	N.D.	N.D.	1000
Bis(2-ethylhexyl) Phthalate(DEHP)	mg/kg	50	N.D.	N.D.	N.D.	N.D.	N.D.	N.D.	1000
Diisobutyl phthalate(DIBP)	mg/kg	50	N.D.	N.D.	N.D.	N.D.	N.D.	N.D.	1000




Appendix


1. Test Flow chart for Cd/Pb /Hg content

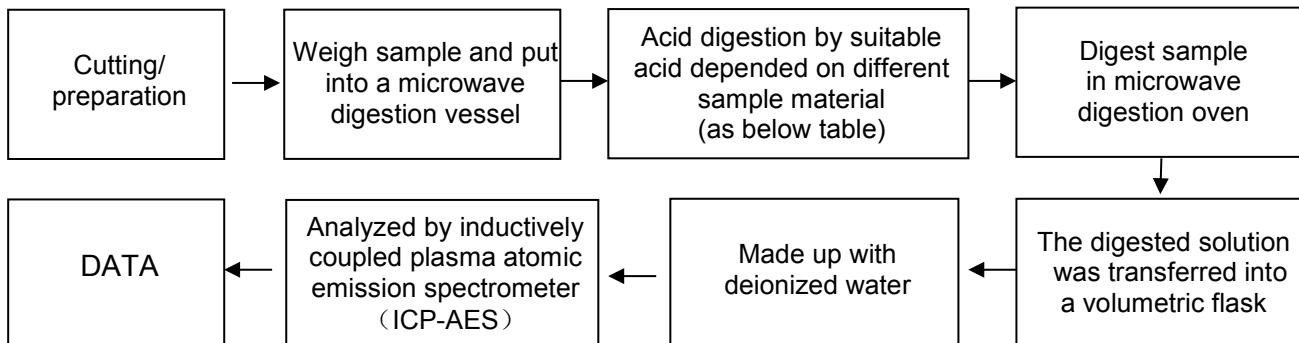


2. Test Flowchart for Cr⁶⁺ content (For non-metal material)

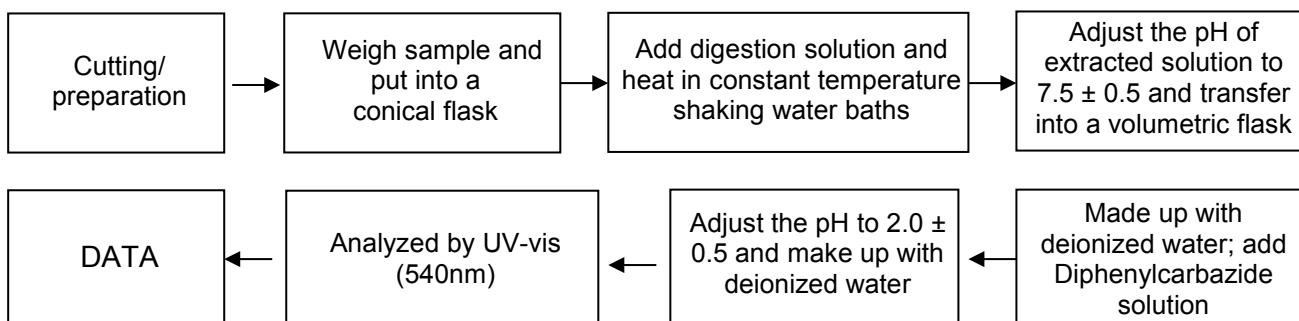

Test Flowchart for Cr⁶⁺ content (For metal material)

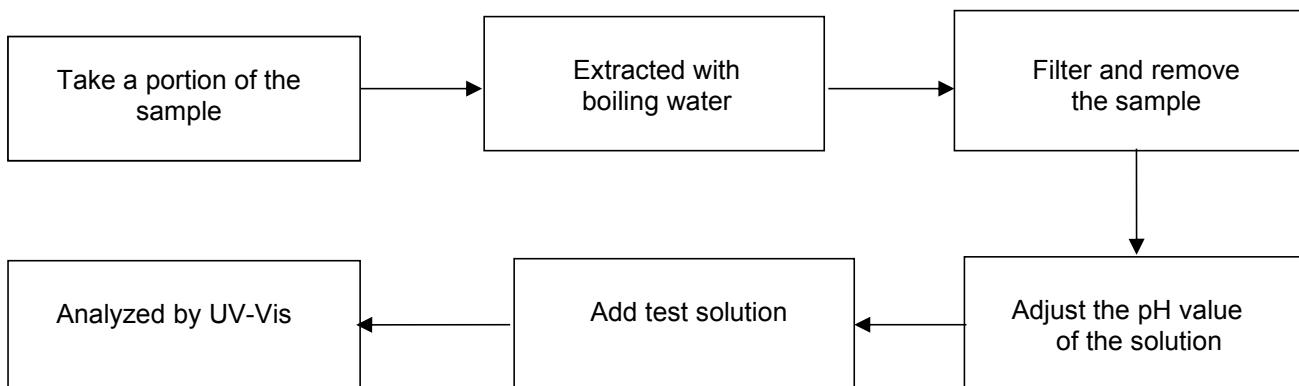

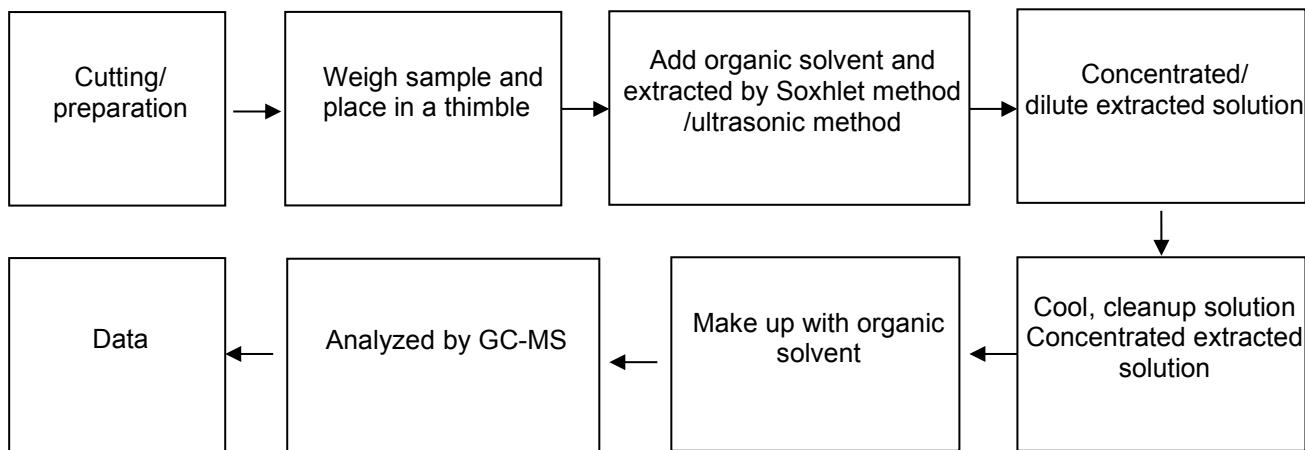

3. Test Flow chart for PBBs & PBDEs & DBP & BBP & DEHP & DIBP content

The photo of the sample

Photo 1 Appearance of EUT



Photo 2 Appearance of EUT

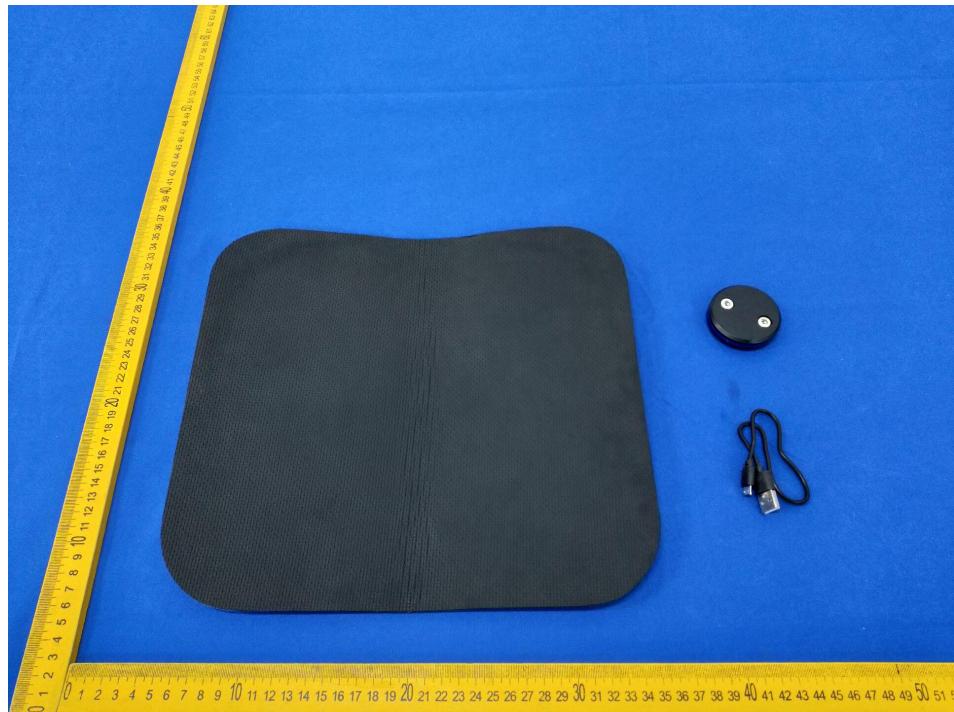


Photo 3 Appearance of EUT**Photo 4 Appearance of EUT**



Photo 5 Inside of EUT

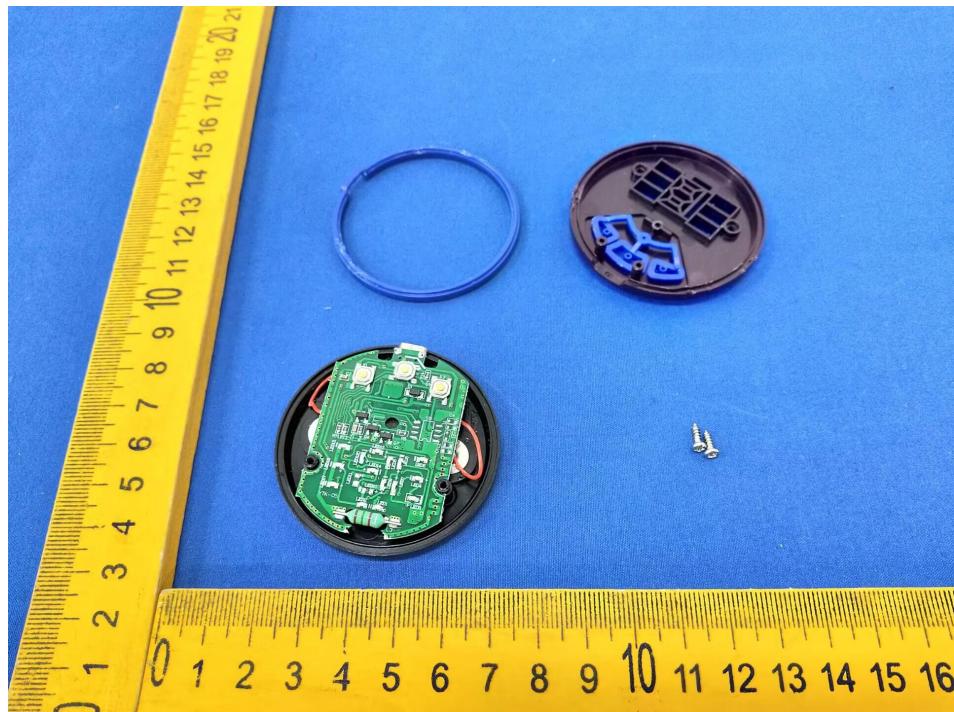


Photo 6 Appearance of PCB

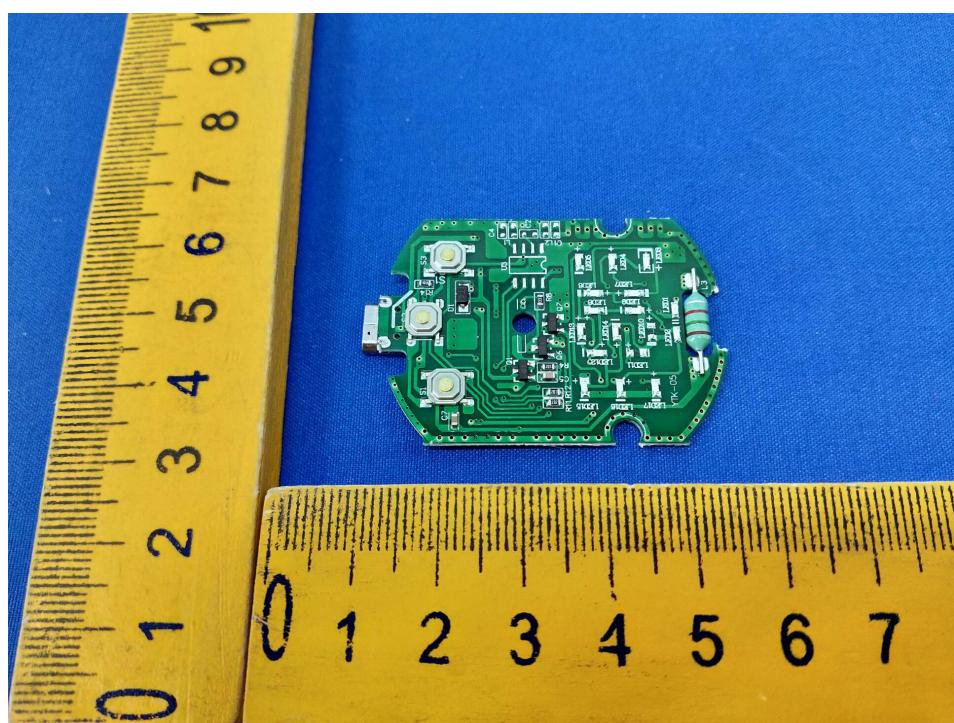




Photo 7 Appearance of PCB

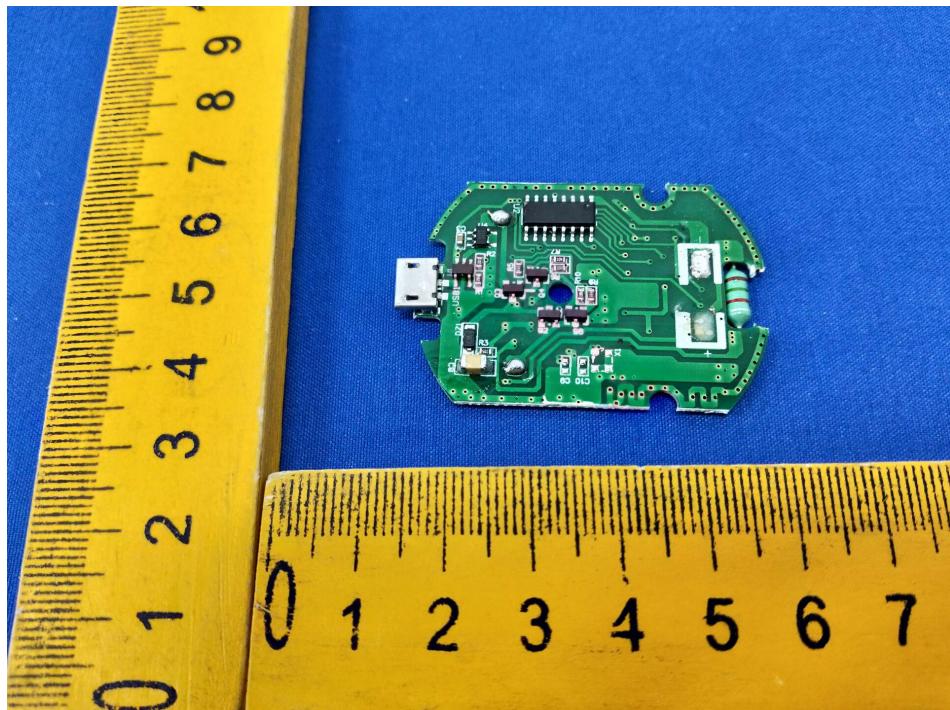


Photo 8 Appearance of Battery



END OF REPORT



CERTIFICATE OF CONFORMITY

No. : LC-240601030623
Applicant : Dongguan Weinimei Electronic Clothing Co., Ltd.
Address : 3rd Floor, No. 62 Hudong Road, Shatian Town, Dongguan City, Guangdong Province
Manufacturer : Shenzhen Outianxiang Technology Co., Ltd.
Address : 3rd Floor, Building 4, Hengmingzhu Science and Technology Industrial Park, Xinqiao Tongfu Industrial Zone, Gonghe Community, Shajing Street, Bao'an District, Shenzhen
Product : 3D massage foot pad
Model(s) : VNM-1031, OTX-258, OTX-1101, VNM-523
Trademark : Beauty Body
Test Standard(s) : EN IEC 55014-1: 2021;
EN IEC 55014-2: 2021.

The EUT described above has been tested by us with the listed standards and found in compliance with the Council EMC Directive 2014/30/EU. It is possible to use CE marking to demonstrate the compliance with the EMC Directive.

The certificate applies to the tested sample above mentioned only and shall not imply an assessment of the whole production. It is only valid in connection with the test report number: LC-240601030623.

CE



Jun. 26, 2024

Shenzhen LC Testing Certification Co., Ltd.

510, Building B15, Yintian Industrial Zone, Yantian Community, Xixiang Street, Baoan District, Shenzhen

Hotline: 0755-23008712

Email: 603422853@qq.com

Http://www.lice-lab.com



EMC Test Report

Application No. : LC-240601030623

Applicant : Dongguan Weinimei Electronic Clothing Co., Ltd.

Equipment Under Test (EUT)

EUT Name : 3D massage foot pad

Model No. : VNM-1031

Serial No. : See page 3

Brand Name : Beauty Body

Receipt Date : 2024-06-17

Test Date : 2024-06-17 to 2024-06-26

Issue Date : 2024-06-26

Standards : EN IEC 55014-1: 2021
EN IEC 55014-2: 2021

Conclusions : **PASS**

In the configuration tested, the EUT complied with the standards specified above. The EUT technically complies with the 2014/30/EU directive requirements.

Test/Witness Engineer



Approved & Authorized

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in the report.



TABLE OF CONTENTS

1. General Information	3
1.1. Client Information	3
1.2. General Description of EUT (Equipment Under Test)	3
1.3. Block Diagram Showing the Configuration of System Tested	3
1.4. Description of Support Units	3
1.5. Performance Criterion	4
1.6. Classification of Apparatus	4
1.7. Test Facility	4
2. Test Results Summary	5
3. Test Equipment Used	6
4. Conducted Emission Test.....	8
4.1. Test Standard and Limit	8
4.2. Test Setup	8
4.3. Test Procedure	8
4.4. Test Condition	9
4.5. Test Data	9
5. Radiated Emission Test.....	12
5.1. Test Standard and Limit	12
5.2. Test Setup	12
5.3. Test Procedure	12
5.4. Test Condition	13
5.5. Test Data	13
6. Electrostatic Discharge Immunity Test.....	16
6.1. Test Requirements	16
6.2. Test Setup	16
6.3. Test Procedure	16
6.4. Test Data	17
7. Radiated Electromagnetic Field Immunity test.....	19
7.1. Test Requirements	19
7.2. Test Setup	19
7.3. Test Procedure	19
7.4. Test Data	20
8. Photographs - Constructional Details	22



1. General Information

1.1. Client Information

Applicant	:	Dongguan Weinimei Electronic Clothing Co., Ltd.
Address	:	3rd Floor, No. 62 Hudong Road, Shatian Town, Dongguan City, Guangdong Province
Manufacturer	:	Shenzhen Outianxiang Technology Co., Ltd.
Address	:	3rd Floor, Building 4, Hengmingzhu Science and Technology Industrial Park, Xinqiao Tongfu Industrial Zone, Gonghe Community, Shajing Street, Bao'an District, Shenzhen

1.2. General Description of EUT (Equipment Under Test)

EUT Name	:	3D massage foot pad
Model No.	:	VNM-1031
Serial No.	:	OTX-258, OTX-1101, VNM-523
Brand Name	:	Beauty Body
Power Supply	:	DC 5V, 1A
Remark: All above models are identical in schematic, structure and critical components except for only different appearance; therefore, EMC testing was performed with VNM-1031 only.		

1.3. Block Diagram Showing the Configuration of System Tested



1.4. Description of Support Units

The EUT has been tested as an independent unit.



1.5. Performance Criterion

Criterion A: The equipment shall continue to operate as intended without operator intervention. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer when the equipment is used as intended.

Criterion B: After the test, the equipment shall continue to operate as intended without operator intervention. No degradation of performance or loss of function is allowed, after the application of the phenomena below a performance level specified by the manufacturer, when the equipment is used as intended.

Criterion C: Loss of function is allowed, provided the function is self-recoverable, or can be restored by the operation of the controls by the user in accordance with the manufacturer's instructions.

1.6. Classification of Apparatus

Category I: Apparatus containing no electronic control circuitry.

Category II: Transformer toys, dual supply toys, mains powered motor operated appliances, tools, heating appliances and similar electric apparatus(for example-UV radiators, IR radiators and microwave ovens) containing electronic control circuitry with no internal clock frequency or oscillator frequency higher than 15MHz.

Category III: Battery powered apparatus (with built-in batteries or external batteries), which in normal use is not connected to the mains, containing an electronic control circuitry with no internal clock frequency or oscillator frequency higher than 15MHz.

This category includes apparatus provided with rechargeable batteries which can be charged by connecting the apparatus to the mains power. However, this apparatus shall also be tested as an apparatus in category III while it is connected to the mains network.

Category IV: All other apparatus covered by the scope of this standard.

1.7. Test Facility

The testing report were performed by the Shenzhen LC Testing Certification Co., Ltd., in their facilities located at 510, Building B15, Yintian Industrial Zone, Yantian Community, Xixiang Street, Baoan District, Shenzhen.



2. Test Results Summary

EMISSION		
Description of test items	Standards	Results
Conducted disturbance at mains terminals	EN IEC 55014-1: 2021	Pass
Disturbance Power	EN IEC 55014-1: 2021	N/A
Click measurement	EN IEC 55014-1: 2021	N/A
Radiated disturbance	EN IEC 55014-1: 2021	Pass
Harmonic current emissions	EN IEC 61000-3-2: 2019/A1: 2021	N/A
Voltage fluctuation and flicker	EN 61000-3-3:2013/A2:2021	N/A
IMMUNITY		
Description of test items	Basic Standards	Results
Electrostatic Discharge (ESD)	EN 61000-4-2: 2009	Pass
Radio-frequency, Continuous Radiated Disturbance	EN IEC 61000-4-3:2020	Pass
EFT/B Immunity	EN 61000-4-4: 2012	N/A
Surge Immunity	EN 61000-4-5: 2014/A1:2017	N/A
Conducted RF Immunity	EN 61000-4-6: 2014	N/A
Voltage dips, 40% reduction	EN IEC 61000-4-11:2020	N/A
Voltage dips, 70% reduction		
Voltage interruptions		

Note: N/A is an abbreviation for Not Applicable.



3. Test Equipment Used

3.1. Test Equipment Used to Measure Conducted Emission					
No.	Equipment	Manufacturer	Model No.	Last Cal.	Cal. Interval
LC-EMC001	EMI Test Receiver	Rohde & Schwarz	ESCS30	Dec. 29, 2023	1 Year
LC-EMC002	AMN	Rohde & Schwarz	ENV216	Dec. 29, 2023	1 Year
LC-EMC003	AMN	SCHWARZBECK	NNBL 8226	Dec. 29, 2023	1 Year
3.2. Test Equipment Used to Measure Disturbance Power					
No.	Equipment	Manufacturer	Model No.	Last Cal.	Cal. Interval
LC-EMC001	EMI Test Receiver	Rohde & Schwarz	ESCS30	Dec. 29, 2023	1 Year
LC-EMC028	Power Clamp	Luthi	MDS-21	Dec. 29, 2023	1 Year
3.3. Test Equipment UseTest Equipment Used to Measure Radiated Emission					
No.	Equipment	Manufacturer	Model No.	Last Cal.	Cal. Interval
LC-EMC004	EMI Test Receiver	Rohde & Schwarz	ESI26	Dec. 29, 2023	1 Year
LC-EMC005	Bilog Antenna	SCHWARZBECK	VULB9163	Dec. 29, 2023	1 Year
LC-EMC006	Positioning Controller	C&C	CC-C-1F	N/A	N/A
3.4. Test Equipment Used to Measure Harmonic Current/ Voltage Fluctuation and Flicker					
No.	Equipment	Manufacturer	Model No.	Last Cal.	Cal. Interval
LC-EMC007	Harmonic Flicker Test System	CI	5001ix-CTS-40	Dec. 29, 2023	1 Year
3.5. Test Equipment Used to Measure Electrostatic Discharge Immunity					
No.	Equipment	Manufacturer	Model No.	Last Cal.	Cal. Interval
LC-EMC008	ESD Tester	TESEQ	NSG437	Dec. 29, 2023	1 Year
3.6. Test Equipment Used to Measure Conducted Immunity					
LC-EMC009	RF Generator	FRANKONIA	CIT-10/75	Dec. 29, 2023	1 Year
LC-EMC010	Attenuator	FRANKONIA	59-6-33	Dec. 29, 2023	1 Year
LC-EMC011	M-CDN	LUTHI	M2/M3	Dec. 29, 2023	1 Year
LC-EMC012	CDN	LUTHI	AF2	Dec. 29, 2023	1 Year
LC-EMC013	EM Injection Clamp	LUTHI	EM101	Dec. 29, 2023	1 Year

**3.7. Test Equipment Used to Measure Radio Frequency Electromagnetic Fields Immunity**

No.	Equipment	Manufacturer	Model No.	Last Cal.	Cal. Interval
LC-EMC014	Signal Generator	Rohde & Schwarz	SMT03	Dec. 29, 2023	1 Year
LC-EMC015	Power Meter	Rohde & Schwarz	NRVD	Dec. 29, 2023	1 Year
LC-EMC016	Voltage Probe	Rohde & Schwarz	URV5-Z2	Dec. 29, 2023	1 Year
LC-EMC017	Voltage Probe	Rohde & Schwarz	URV5-Z2	Dec. 29, 2023	1 Year
LC-EMC018	Power Amplifier	AR	150W1000	Dec. 29, 2023	1 Year
LC-EMC019	Bilog Antenna	Chase	CBL6111C	Dec. 29, 2023	1 Year

3.8. Test Equipment Used to Measure Electrical Fast Transient/Burst Immunity

No.	Equipment	Manufacturer	Model No.	Last Cal.	Cal. Interval
LC-EMC020	Simulator	EMTEST	UCS500N5	Dec. 29, 2023	1 Year
LC-EMC021	Auto-transformer	EMTEST	V4780S2	Dec. 29, 2023	1 Year

3.9. Test Equipment Used to Measure Surge Immunity

No.	Equipment	Manufacturer	Model No.	Last Cal.	Cal. Interval
LC-EMC022	Simulator	EMTEST	UCS500N5	Dec. 29, 2023	1 Year
LC-EMC023	Coupling Clamp	EMTEST	HFK	Dec. 29, 2023	1 Year

3.10. Test Equipment Used to Measure Voltage Dips and Interruptions Immunity

No.	Equipment	Manufacturer	Model No.	Last Cal.	Cal. Interval
LC-EMC022	Simulator	EMTEST	UCS500N5	Dec. 29, 2023	1 Year
LC-EMC023	Coupling Clamp	EMTEST	HFK	Dec. 29, 2023	1 Year

4. Conducted Emission Test

4.1. Test Standard and Limit

4.1.1. Test Standard

EN IEC 55014-1: 2021.


4.1.2. Test Limit

Conducted Disturbance Test Limit

Frequency	Maximum RF Line Voltage (dB μ V)	
	Quasi-peak Level	Average Level
150kHz~350kHz	66 ~ 56*	56 ~ 46 *
350kHz~5MHz	56	46
5MHz~30MHz	60	50

Remark: "*" Decreasing linearly with logarithm of the frequency

4.2. Test Setup

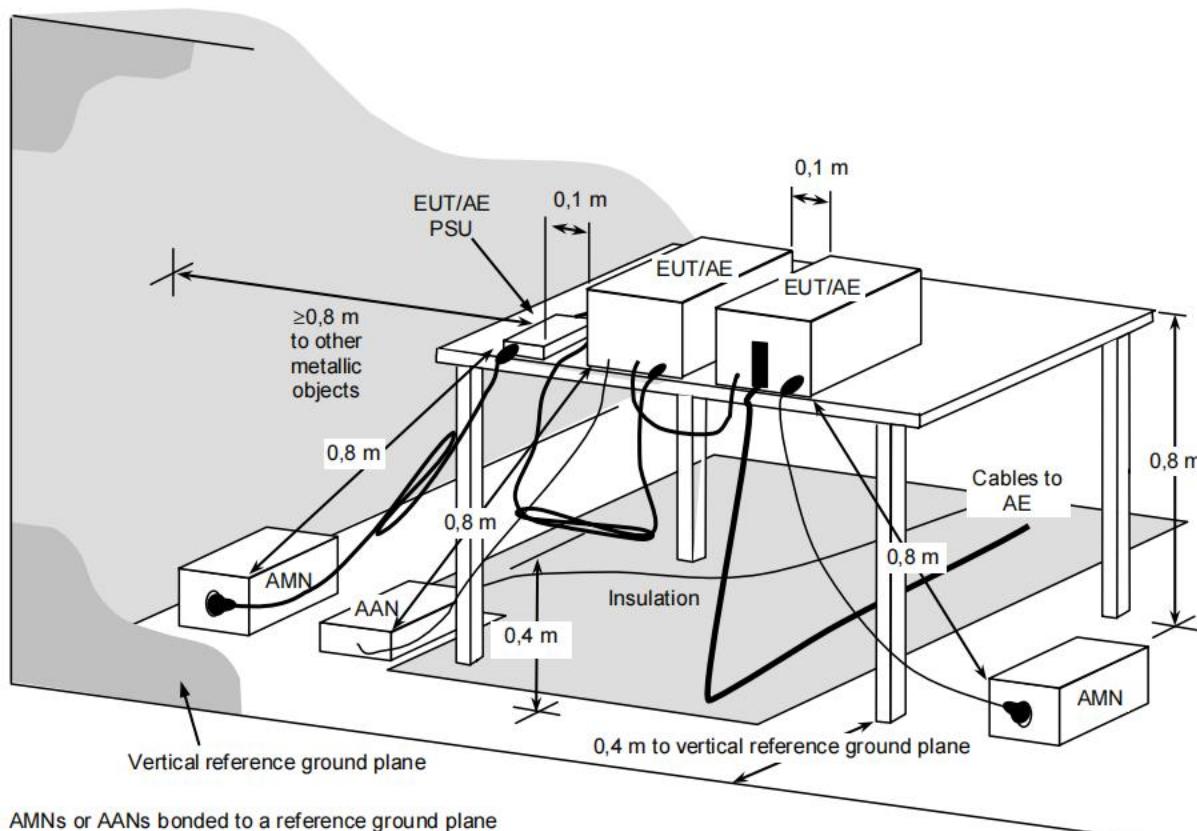

4.3. Test Procedure

The EUT was placed 0.8 meters from the horizontal ground plane with EUT being



connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.

Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.

I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.

LISN at least 80 cm from nearest part of EUT chassis.

The bandwidth of EMI test receiver is set at 9kHz, and the test frequency band is from 0.15MHz to 30MHz.

4.4. Test Condition


Temperature	:	25 °C
Relative Humidity	:	48 %
Pressure	:	1010 hPa
Test Power	:	DC 5V

4.5. Test Data


Please refer to the following pages.



Operating Condition: Normal
Test Specification: L

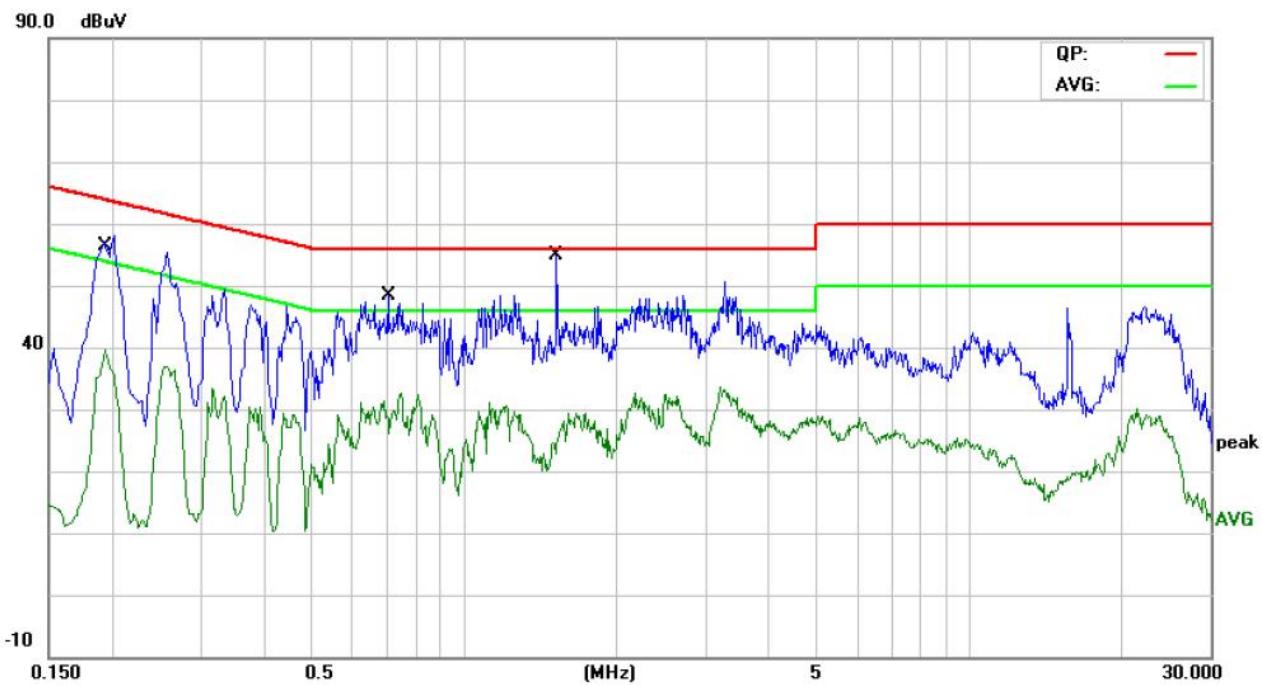

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV	dBuV	dB		
1	*	0.1965	39.78	10.36	50.14	63.75	-13.61	QP	
2		0.1965	25.63	10.36	35.99	53.75	-17.76	AVG	
3		0.7060	32.94	9.44	42.38	56.00	-13.62	QP	
4		0.7060	18.13	9.44	27.57	46.00	-18.43	AVG	
5		1.5220	24.15	9.32	33.47	56.00	-22.53	QP	
6		1.5220	10.69	9.32	20.01	46.00	-25.99	AVG	

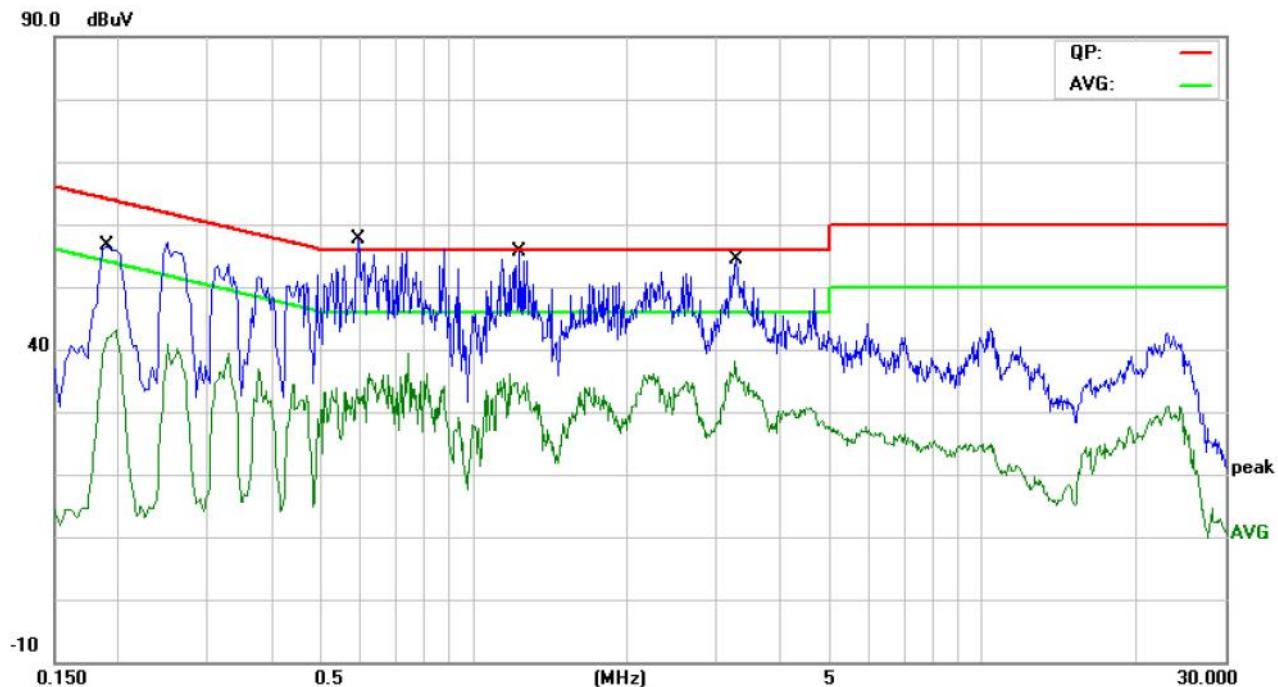Operating Condition: Normal**Test Specification: N**

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV	dBuV	dB		
1	*	0.1900	40.16	10.47	50.63	64.03	-13.40	QP	
2		0.1900	25.42	10.47	35.89	54.03	-18.14	AVG	
3		0.5940	31.71	9.43	41.14	56.00	-14.86	QP	
4		0.5940	16.16	9.43	25.59	46.00	-20.41	AVG	
5		1.2340	29.93	9.34	39.27	56.00	-16.73	QP	
6		1.2340	15.33	9.34	24.67	46.00	-21.33	AVG	
7		3.2780	32.04	9.42	41.46	56.00	-14.54	QP	
8		3.2780	21.64	9.42	31.06	46.00	-14.94	AVG	

5. Radiated Emission Test

5.1. Test Standard and Limit

5.1.1. Test Standard


EN IEC 55014-1: 2021.

5.1.2. Test Limit

Radiated Disturbance Test Limit	
Frequency	Limit (dB μ V/m)
Quasi-peak Level	
30MHz~230MHz	40
230MHz~1000MHz	47

Remark: 1. The lower limit shall apply at the transition frequency.
2. The test distance is 3m.

5.2. Test Setup

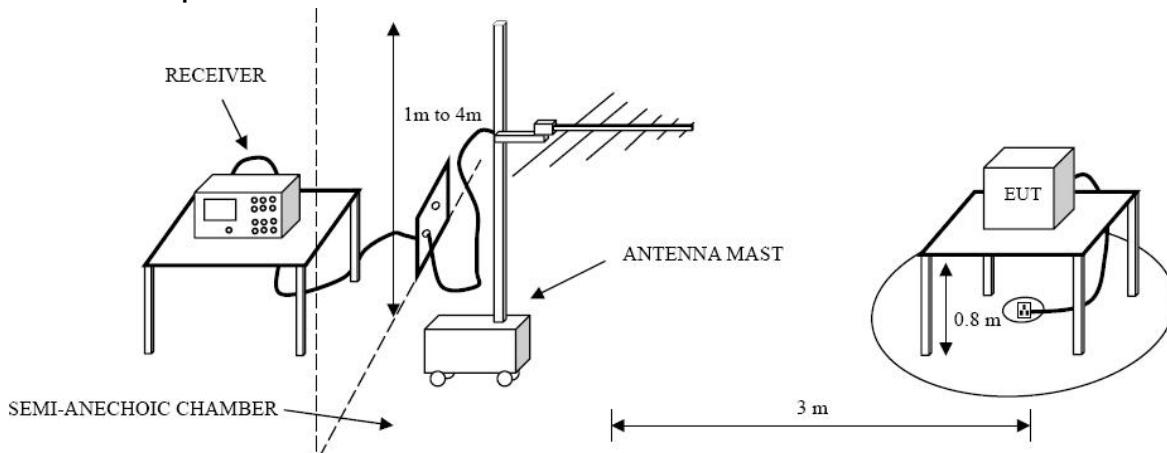

5.3. Test Procedure

The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3m. The table was rotated 360 degrees to determine the position of the highest radiation.

The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

The initial step in collecting radiated emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range.

If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.



5.4. Test Condition


Temperature	:	23 °C
Relative Humidity	:	52 %
Pressure	:	1010 hPa
Test Power	:	DC 5V

5.5. Test Data

Please refer to the following pages.



Operating Condition: Normal
Test Specification: Horizontal

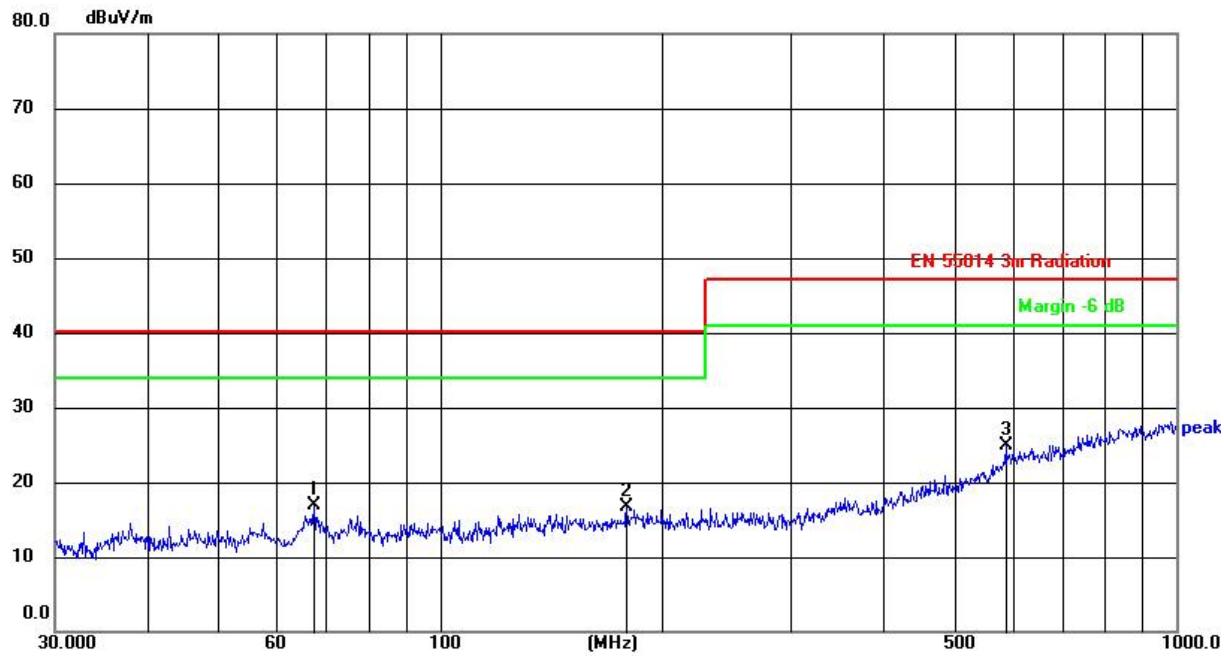


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	67.4382	37.49	-20.67	16.82	40.00	-23.18	peak				
2	179.3863	34.80	-18.08	16.72	40.00	-23.28	peak				
3	586.8437	35.70	-10.80	24.90	47.00	-22.10	peak				



Operating Condition: Normal

Test Specification: Vertical

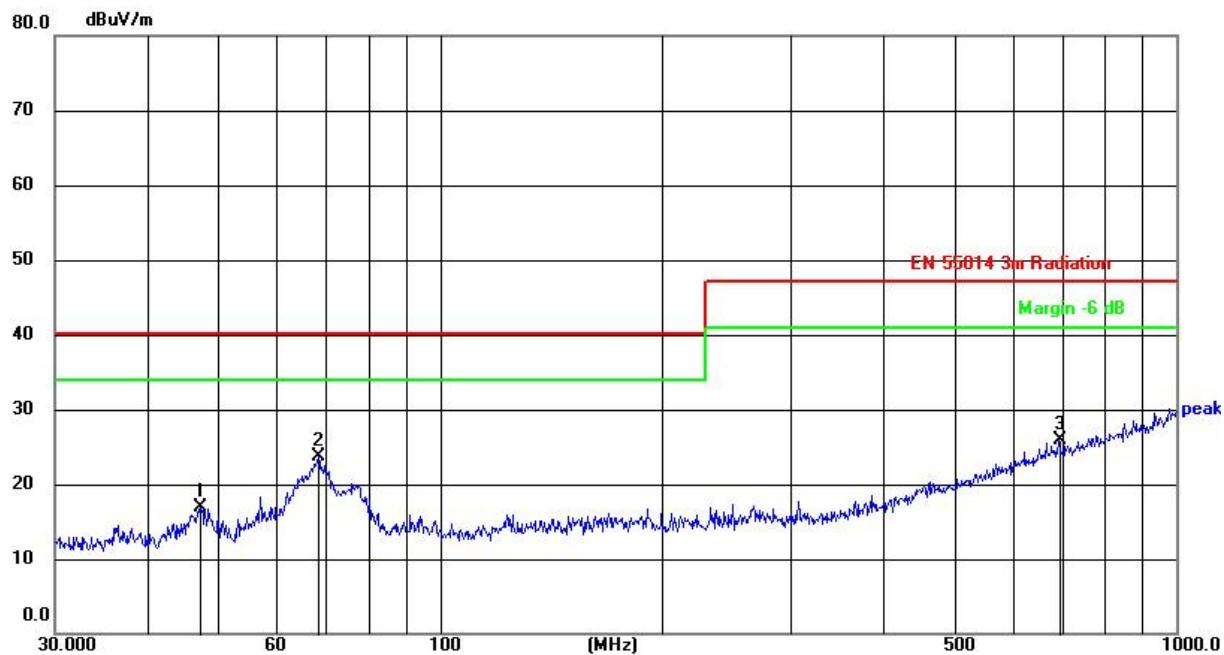

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	47.3253	37.92	-20.98	16.94	40.00	-23.06	peak				
2	68.3908	44.22	-20.58	23.64	40.00	-16.36	peak				
3	691.9867	35.05	-9.09	25.96	47.00	-21.04	peak				

6. Electrostatic Discharge Immunity Test

6.1. Test Requirements

6.1.1. Test Standard


EN IEC 55014-2: 2021 (EN 61000-4-2:2009)

6.1.2. Test Level

Level	Test Voltage Contact Discharge (KV)	Test Voltage Air Discharge (KV)
1.0	± 2	± 2
2.0	± 4	± 4
3.0	± 6	± 8
4.0	± 8	± 15
X	Special	Special

6.1.3. Performance criterion: B

6.2. Test Setup

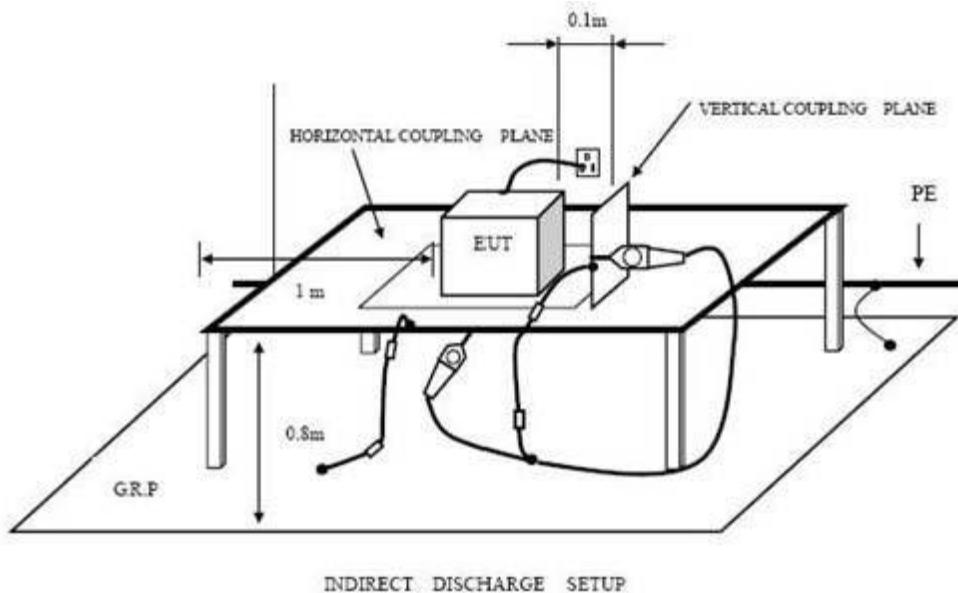

6.3. Test Procedure

6.3.1. Air Discharge:

This test is done on a non-conductive surface. The round discharge tip of the discharge electrode shall be approached as fast as possible to touch the EUT. After each discharge, the discharge electrode shall be removed from the EUT. The generator is then re-triggered for a new single discharge and repeated 10 times for each pre-selected test point. This procedure shall be repeated until all the air discharge completed.



6.3.2. Contact Discharge:

All the procedure shall be same as air discharge. Except that the tip of the discharge electrode shall touch the EUT before the discharge switch is operated.

6.3.3. Indirect discharge for horizontal coupling plane

At least 10 single discharges (in the most sensitive polarity) shall be applied at the front edge of each HCP opposite the center point of each unit (if applicable) of the EUT and 0.1m from the front of the EUT. The long axis of the discharge electrode shall be in the plane of the HCP and perpendicular to its front edge during the discharge.

6.3.4. Indirect discharge for vertical coupling plane

At least 10 single discharges (in the most sensitive polarity) shall be applied to the center of one vertical edge of the coupling plane. The coupling plane, of dimensions 0.5m X 0.5m, is placed parallel to, and positioned at a distance of 0.1m from the EUT. Discharges shall be applied to the coupling plane, with this plane in sufficient different positions that the four faces of the EUT are completely illuminated.

6.4. Test Data

Please refer to the following page.



Electrostatic Discharge Test Result

EUT	: 3D massage foot pad	M/N	: VNM-1031
Temperature	: 22°C	Humidity	: 50%
Power supply	: DC 5V	Test Mode	: Normal
Criterion: B			
Air Discharge: $\pm 8\text{kV}$ Contact Discharge: $\pm 4\text{kV}$			
For each point positive 10 times and negative 10 times discharge.			
Location	Kind A-Air Discharge C-Contact Discharge	Result	
Nonconductive Enclosure	A	PASS	
Button	A	PASS	
Conductive Enclosure	C	PASS	
HCP	C	PASS	
VCP of front	C	PASS	
VCP of rear	C	PASS	
VCP of left	C	PASS	
VCP of right	C	PASS	
Remark:			

7. Radiated Electromagnetic Field Immunity test

7.1. Test Requirements

7.1.1. Test Standard


EN IEC 55014-2: 2021 (EN IEC 61000-4-3:2020)

7.1.2. Test Level

Level	Field Strength V/m
1.0	1
2.0	3
3.0	10
X	Special

7.1.3. Performance criterion: A

7.2. Test Setup

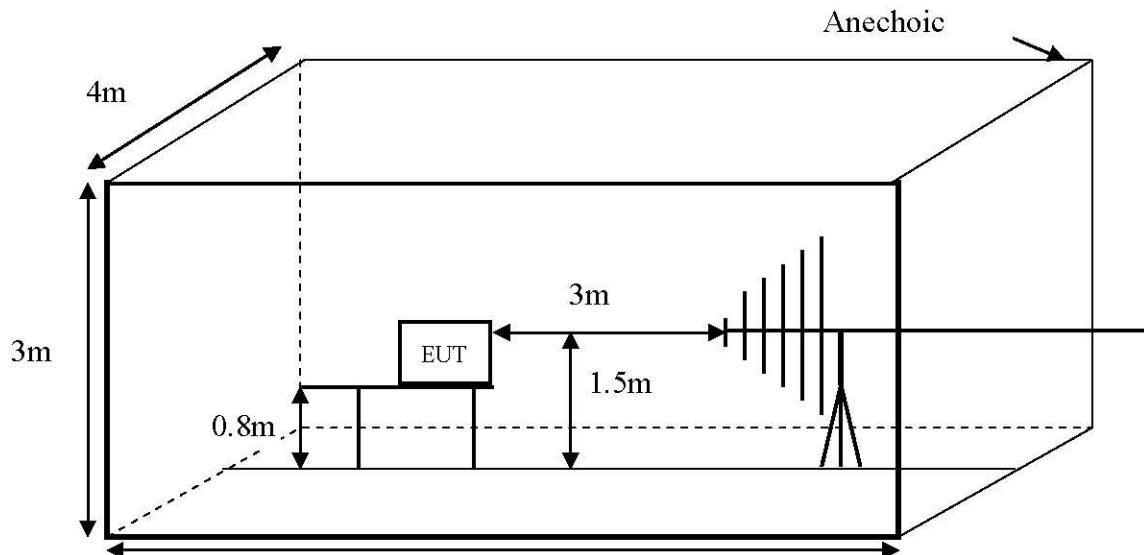

7.3. Test Procedure

The EUT are placed on a table, which is 0.8 meter high above the ground. The EUT is set 3 meters away from the transmitting antenna, which is mounted on an antenna tower. Both horizontal and vertical polarization of the antenna is set on test. Each of the four sides of the EUT must be faced this transmitting antenna and measured individually.

In order to judge the EUT performance, a camera is used to monitor its screen.



All the scanning conditions are as following:

Condition of Test	Remark
1. Fielded Strength	3V/m (Severity Level 2)
2. Radiated Signal	Modulated
3. Scanning Frequency	80-1000MHz
4. Sweep time of radiated	0.0015 Decade/s
5. Dwell Time	1 Sec.

7.4. Test Data

Please refer to the following page.



RF Field Strength Susceptibility Test Results

EUT	: 3D massage foot pad		M/N	: VNM-1031					
Temperature	: 22°C		Humidity	: 50%					
Power supply	: DC 5V		Test Mode	: Normal					
Criterion: A									
Modulation: Unmodulated									
Pulse: AM 1KHz 80%									
	Frequency Range 1		Frequency Range 2						
	80~1000MHz		/						
	Horizontal	Vertical	Horizontal	Vertical					
Front	PASS	PASS	/	/					
Right	PASS	PASS	/	/					
Rear	PASS	PASS	/	/					
Left	PASS	PASS	/	/					

8. Photographs - Constructional Details

Photo 1 Appearance of EUT



Photo 2 Appearance of EUT

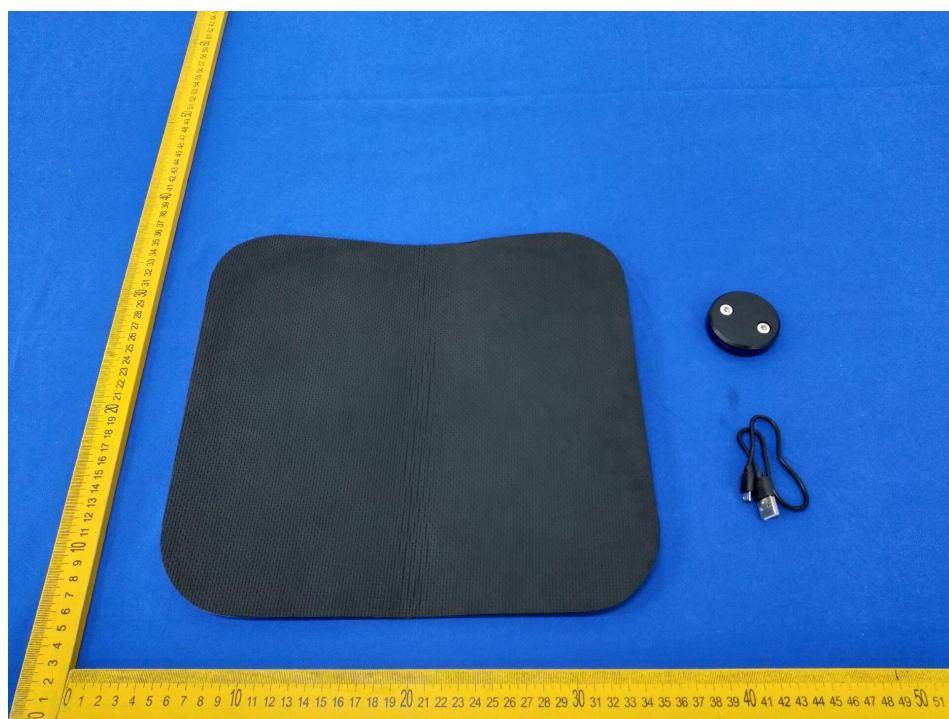


Photo 3 Appearance of EUT



Photo 4 Appearance of EUT

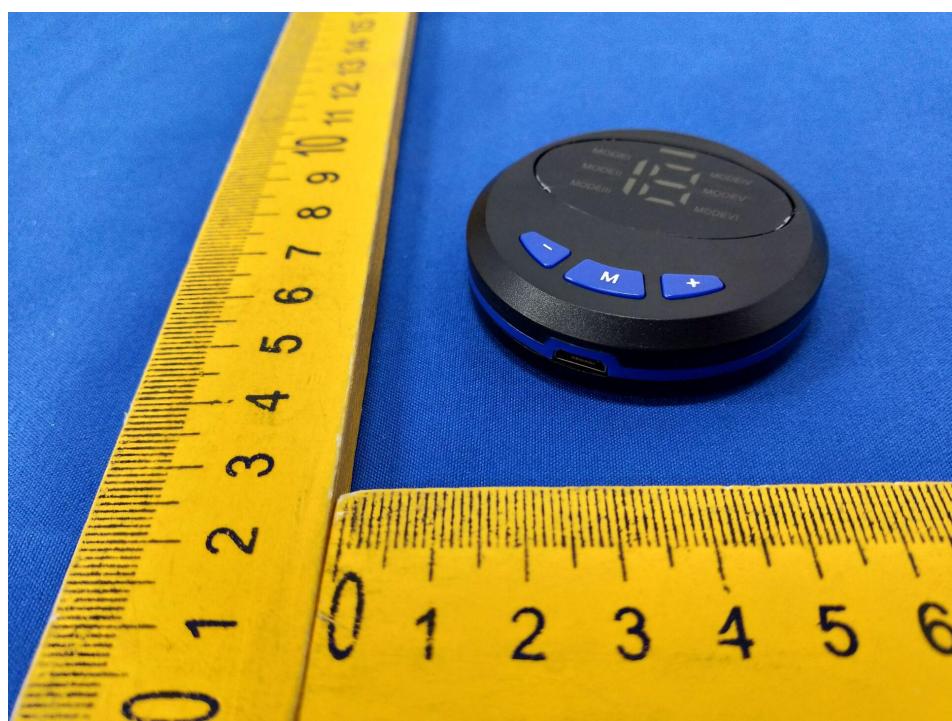


Photo 5 Inside of EUT

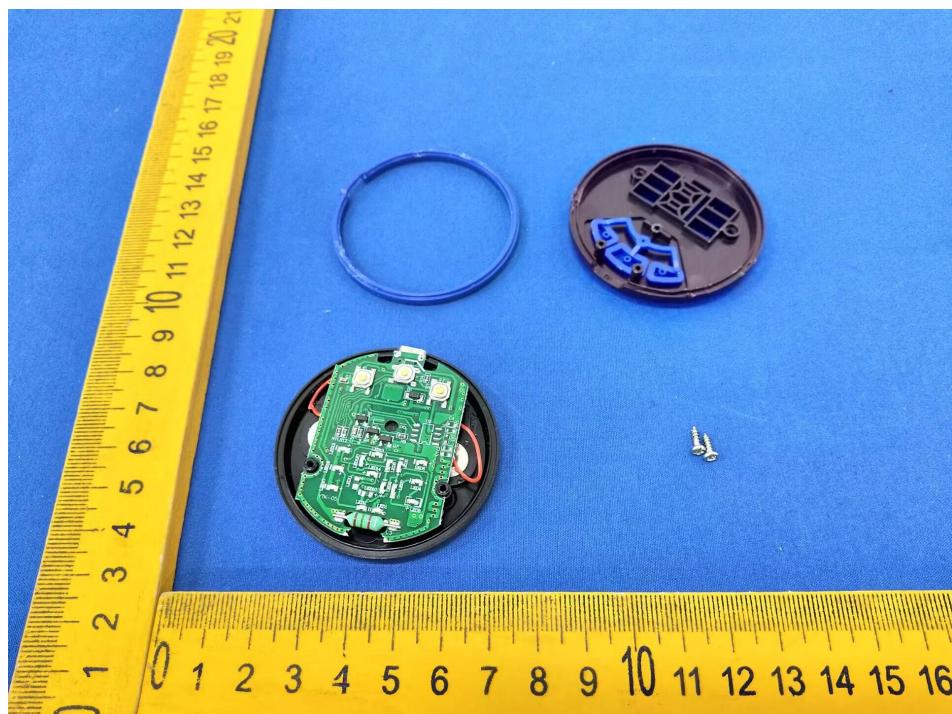


Photo 6 Appearance of PCB

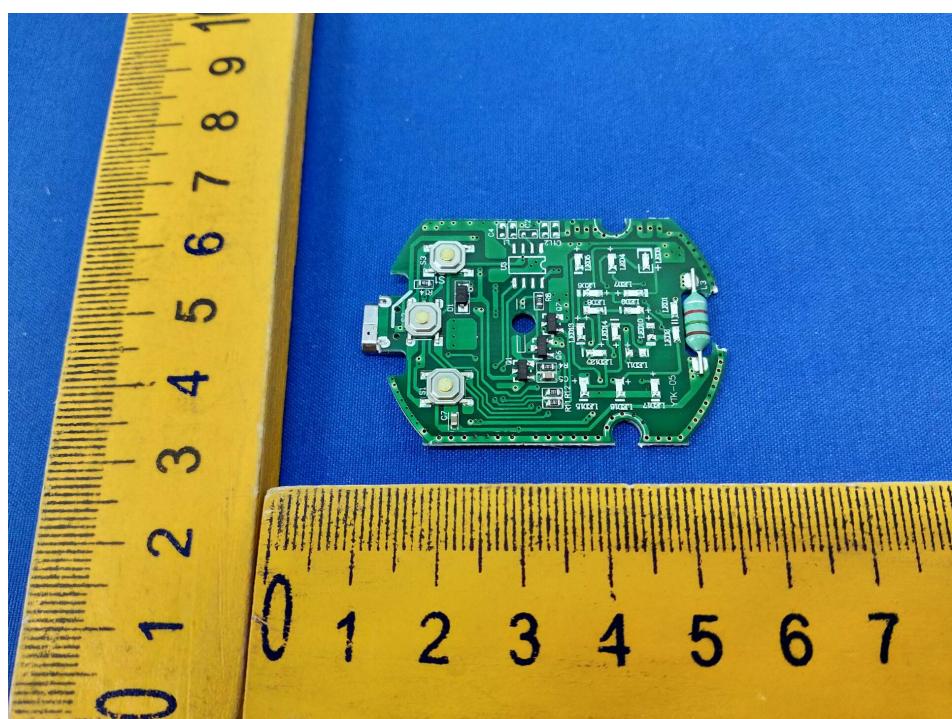


Photo 7 Appearance of PCB

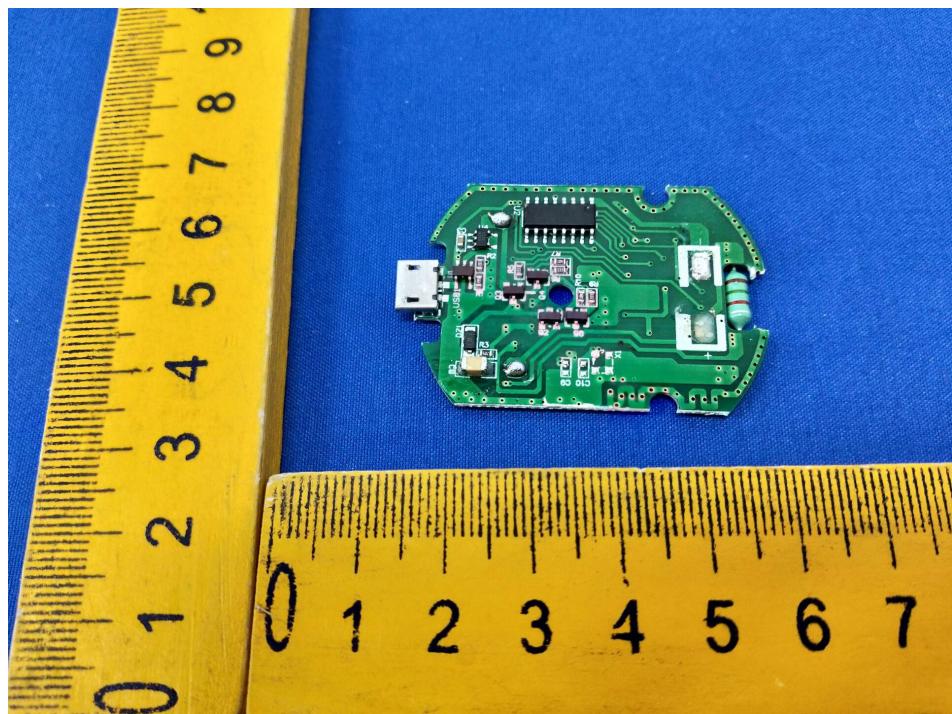


Photo 8 Appearance of Battery



END OF REPORT



SUPPLIER' S DECLARATION OF CONFORMITY

No. : LC-240601030624

Applicant : Dongguan Weinimei Electronic Clothing Co., Ltd.

Address : 3rd Floor, No. 62 Hudong Road, Shatian Town, Dongguan City, Guangdong Province

Manufacturer : Shenzhen Outianxiang Technology Co., Ltd.
3rd Floor, Building 4, Hengmingzhu Science and Technology Industrial Park, Xinqiao Tongfu Industrial Zone, Gonghe Community, Shajing Street, Bao'an District, Shenzhen

Product : 3D massage foot pad

Model(s) : VNM-1031, OTX-258, OTX-1101, VNM-523

Trademark : Beauty Body

Test Standard(s) : FCC Part 15 Subpart B

This device complies with Part 15 of the FCC rules, operation is subject to the following two conditions:

- (1) This device may not cause harmful interference
- (2) This device must accept any interference received, including interference that may cause undesired operation.

This is the results of test that was carried out by Shenzhen LC Testing Certification Co., Ltd.. From the submitted type samples of the product is conformity with the specification of the respective standards.

It is only valid in connection with the test report number: LC-240601030624.



Jun. 26, 2024

Shenzhen LC Testing Certification Co., Ltd.
510, Building B15, Yintian Industrial Zone, Yantian Community, Xixiang Street, Baoan District, Shenzhen

HOTLINE:0755-23008712

Email: 603422853@qq.com

Http://www.lice-lab.com



FCC Part 15B Test Report

Application No. : LC-240601030624

Applicant : Dongguan Weinimei Electronic Clothing Co., Ltd.

Equipment Under Test (EUT)

EUT Name : 3D massage foot pad

Model No. : VNM-1031

Serial No. : See page 3

Brand Name : Beauty Body

Receipt Date : 2024-06-17

Test Date : 2024-06-17 to 2024-06-26

Issue Date : 2024-06-26

Standards : FCC Part 15 Subpart B

Conclusions : **PASS**

In the configuration tested, the EUT complied with the standards specified above. The EUT technically complies with the FCC requirements

Test/Witness Engineer



Approved & Authorized

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in the report.



Contents

CONTENTS	2
1. GENERAL INFORMATION	3
1.1 Client Information	3
1.2 General Description of EUT (Equipment Under Test)	3
1.3 Block Diagram Showing The Configuration of System Tested	3
1.4 Test standards	3
1.5 Test Facility	4
1.6 Equipment Used Test	4
2. TEST SUMMARY	5
3. CONDUCTED EMISSION TEST	6
3.1 Test Standard and Limit	6
3.2 Test Setup	6
3.3 Test Procedure	6
3.4 Test Data	7
4. RADIATED EMISSION TEST	8
4.1 Test Standard and Limit	8
4.2 Test Setup	8
4.3 Test Procedure	8
4.4 Test Condition	9
4.5 Test Data	9
5. PHOTOGRAPHS - CONSTRUCTIONAL DETAILS	12



1. General Information


1.1 Client Information

Applicant	:	Dongguan Weinimei Electronic Clothing Co., Ltd.
Address	:	3rd Floor, No. 62 Hudong Road, Shatian Town, Dongguan City, Guangdong Province
Manufacturer	:	Shenzhen Outianxiang Technology Co., Ltd.
Address	:	3rd Floor, Building 4, Hengmingzhu Science and Technology Industrial Park, Xinqiao Tongfu Industrial Zone, Gonghe Community, Shajing Street, Bao'an District, Shenzhen

1.2 General Description of EUT (Equipment Under Test)

EUT Name	:	3D massage foot pad
Model No.	:	VNM-1031
Serial No.	:	OTX-258, OTX-1101, VNM-523
Brand Name	:	Beauty Body
Power Supply	:	DC 5V, 1A
Remark: All above models are identical in schematic, structure and critical components except for only different appearance; therefore, FCC testing was performed with VNM-1031 only.		

1.3 Block Diagram Showing The Configuration of System Tested



1.4 Test standards

The objective is to determine compliance with FCC Part 15, Subpart B, and section 15.107, 15.109 rules.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.



1.5 Test Facility

The testing report were performed by the Shenzhen LC Testing Certification Co., Ltd., in their facilities located at 510, Building B15, Yintian Industrial Zone, Yantian Community, Xixiang Street, Baoan District, Shenzhen.

1.6 Equipment Used Test

1.6.1 Test Equipment Used to Measure Conducted Emission

No.	Equipment	Manufacturer	Model No.	Last Cal.	Cal. Interval
LC-EMC001	EMI Test Receiver	Rohde & Schwarz	ESCS30	Dec. 29, 2023	1 Year
LC-EMC002	AMN	Rohde & Schwarz	ENV216	Dec. 29, 2023	1 Year
LC-EMC003	AMN	SCHWARZBECK	NNBL 8226-2	Dec. 29, 2023	1 Year

1.6.2 Test Equipment Used to Measure Radiated Emission

No.	Equipment	Manufacturer	Model No.	Last Cal.	Cal. Interval
LC-EMC004	EMI Test Receiver	Rohde & Schwarz	ESI26	Dec. 29, 2023	1 Year
LC-EMC005	Bilog Antenna	SCHWARZBECK	VULB9163	Dec. 29, 2023	1 Year
LC-EMC006	Positioning Controller	C&C	CC-C-1F	N/A	N/A



2. Test Summary

Test Items	Test Requirement	Test Method	Result
Conducted Emission	FCC Part 15 Subpart B	ANSI C63.4	N/A
Radiated Emission	FCC Part 15 Subpart B	ANSI C63.4	Pass
Note: N/A is an abbreviation for Not Applicable.			

3. Conducted Emission Test

3.1 Test Standard and Limit

3.1.1 Test Standard

FCC Part 15 B


3.1.2 Test Limit

Conducted Emission Test Limit (Class B)

Frequency	Maximum RF Line Voltage (dBμV)	
	Quasi-peak Level	Average Level
150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
500kHz~5MHz	56	46
5MHz~30MHz	60	50

*decreasing linearly with logarithm of the frequency

3.2 Test Setup

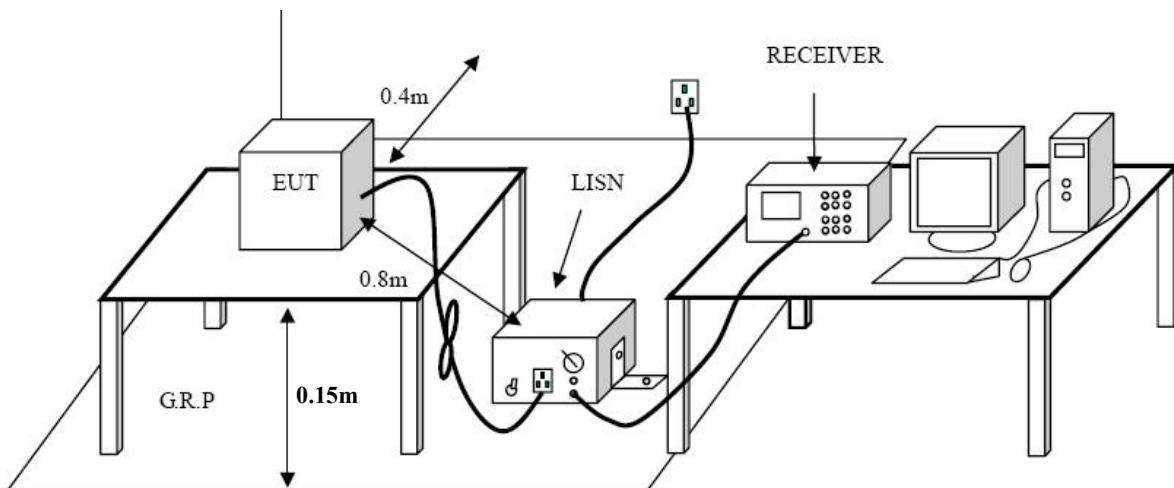

3.3 Test Procedure

The EUT was placed 0.15 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.

The cables shall be insulated (by up to 15 cm) from the horizontal ground reference plane, and shall be folded back and forth in the center forming a bundle 30 to 40 cm long.

I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.



LISN at least 80 cm from nearest part of EUT chassis.

The bandwidth of EMI test receiver is set at 9kHz, and the test frequency band is from 0.15MHz to 30MHz.

3.4 Test Data

This test is not applicable.

4. Radiated Emission Test

4.1 Test Standard and Limit

4.1.1 Test Standard

FCC Part 15 B

4.1.2 Test Limit


Radiated Emission Test Limit (Class B)

Frequency MHz	Field Strengths Limits dB(μ V/m)
30 ~ 88	40.0
88 ~ 216	43.5
216 ~ 960	46.0
960 ~ 1000	54.0

* The lower limit shall apply at the transition frequency.

* The test distance is 3m.

4.2 Test Setup

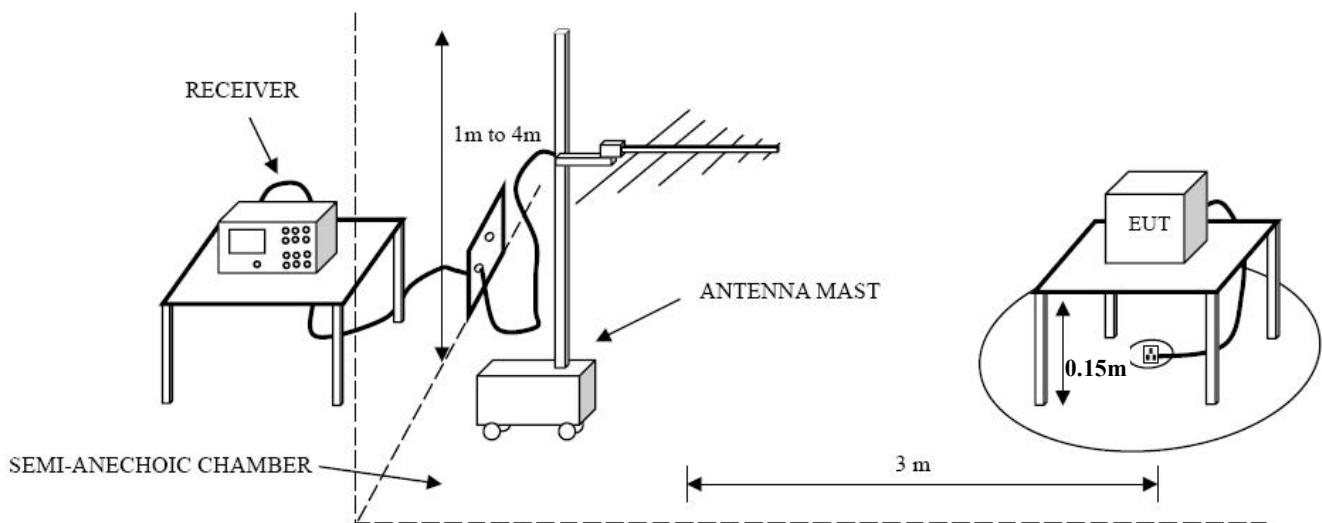

4.3 Test Procedure

The EUT was placed on the top of a rotating table which is 0.15 meters above the ground. EUT is set 3.0 meters away from the receiving antenna that mounted on a antenna tower. The table was rotated 360 degrees to determine the position of the highest radiation, the antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.



Measurements shall be made with a quasi-peak measuring receiver in the frequency range 30MHz to 1000MHz. If the Peak Mode measured value compliance with and lower than quasi-peak mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.

4.4 Test Condition

Temperature	:	25 °C
Relative Humidity	:	48 %
Pressure	:	1010 hPa
Test Power	:	DC 5V


4.5 Test Data

Please refer to the following pages.



Operating Condition: Normal

Test Specification: Horizontal

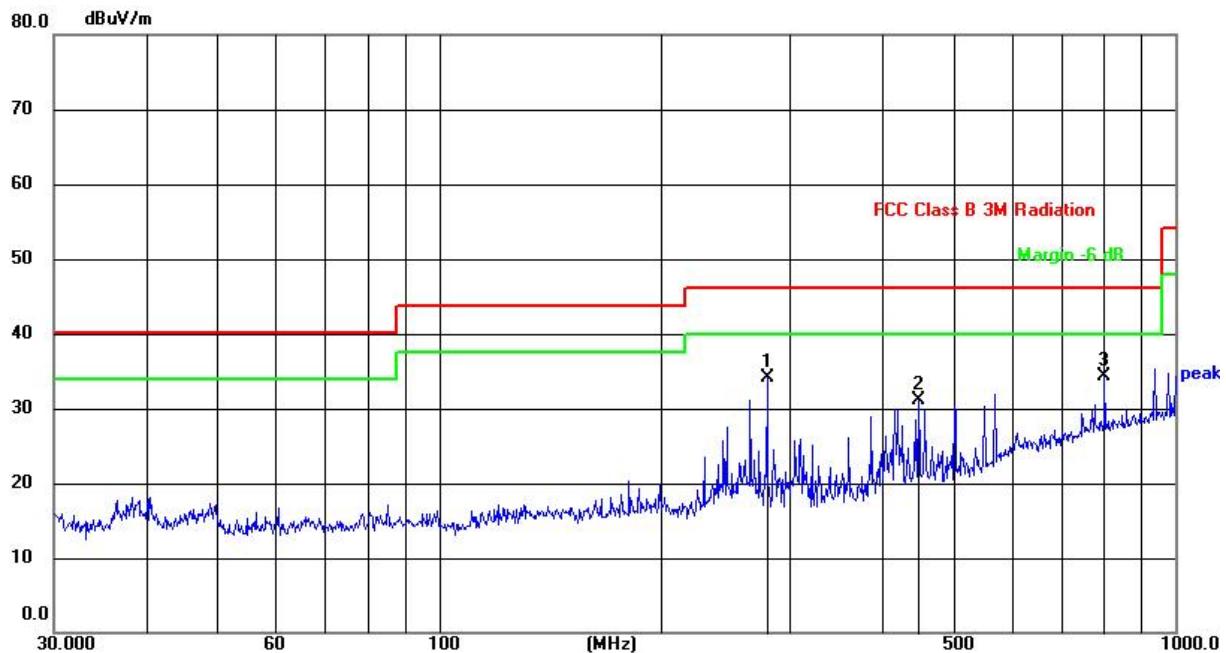


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	279.0436	52.56	-18.42	34.14	46.00	-11.86	peak				
2	447.9822	46.01	-14.81	31.20	46.00	-14.80	peak				
3	801.7863	41.80	-7.42	34.38	46.00	-11.62	peak				



Operating Condition: Normal

Test Specification: Vertical

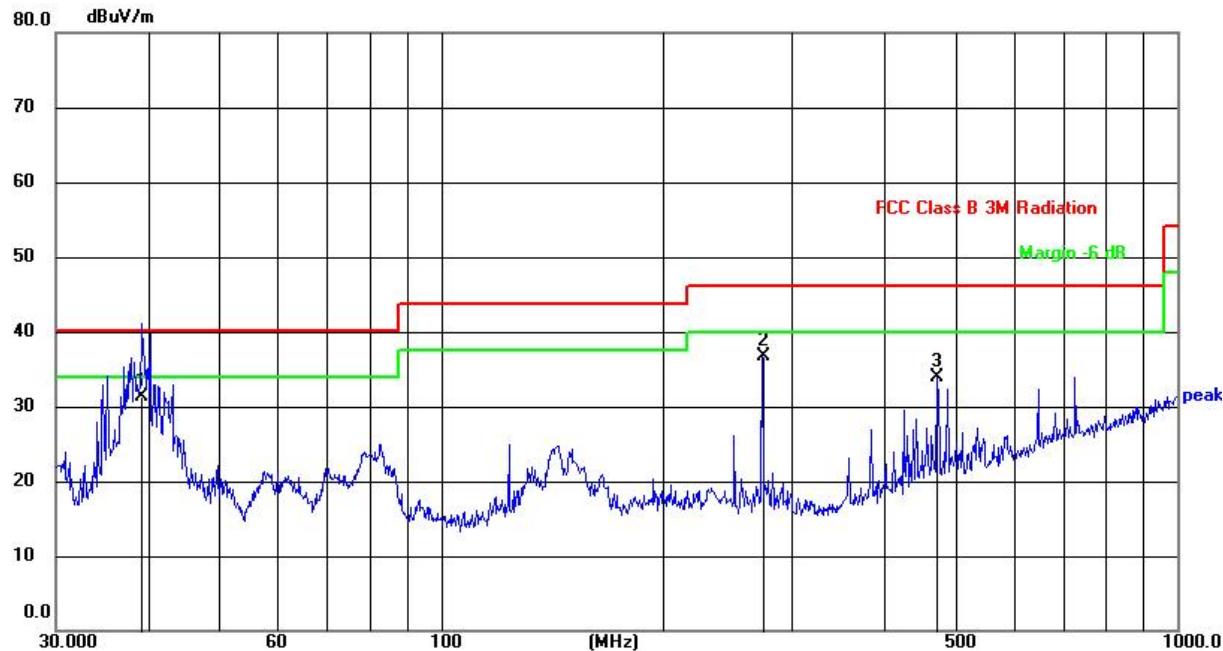

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	39.2991	51.99	-20.69	31.30	40.00	-8.70	QP				
2	273.2341	54.74	-17.95	36.79	46.00	-9.21	peak				
3	472.1760	48.21	-14.34	33.87	46.00	-12.13	peak				

5. Photographs - Constructional Details

Photo 1 Appearance of EUT

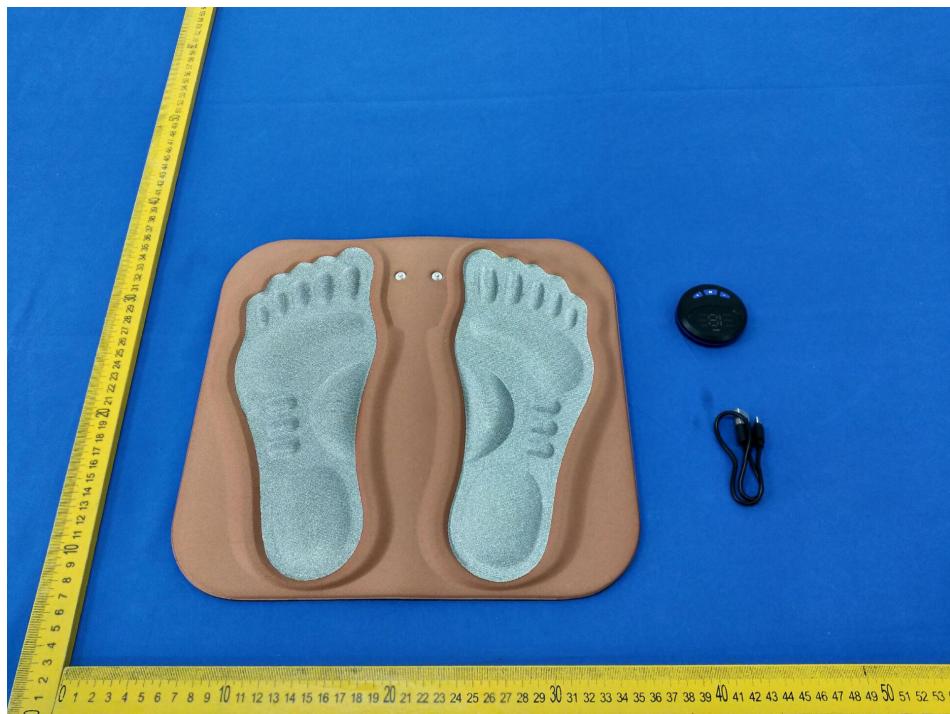


Photo 2 Appearance of EUT

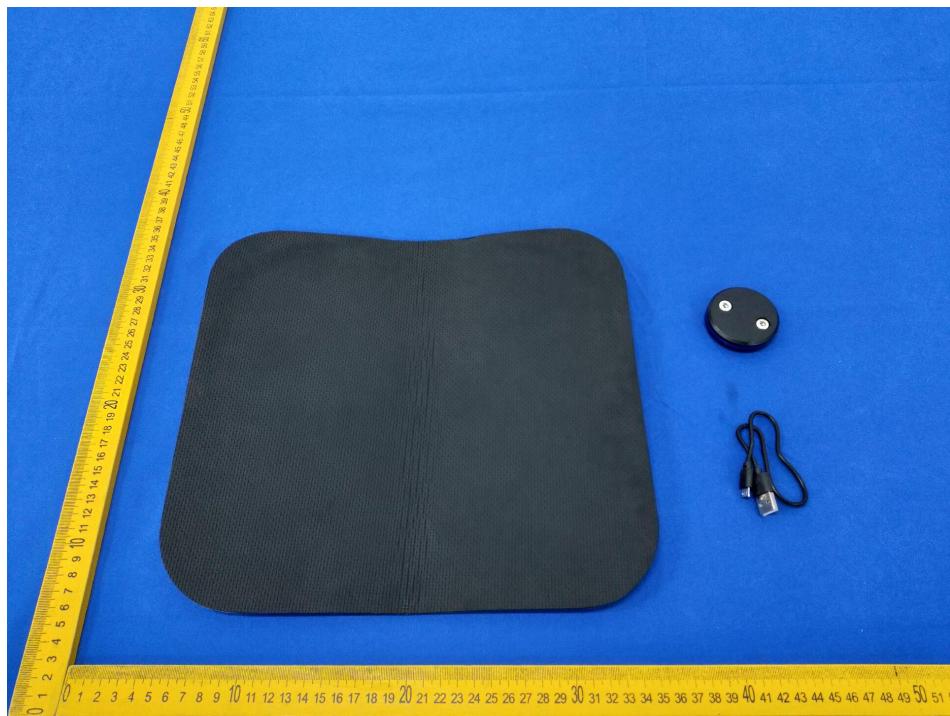


Photo 3 Appearance of EUT



Photo 4 Appearance of EUT



Photo 5 Inside of EUT

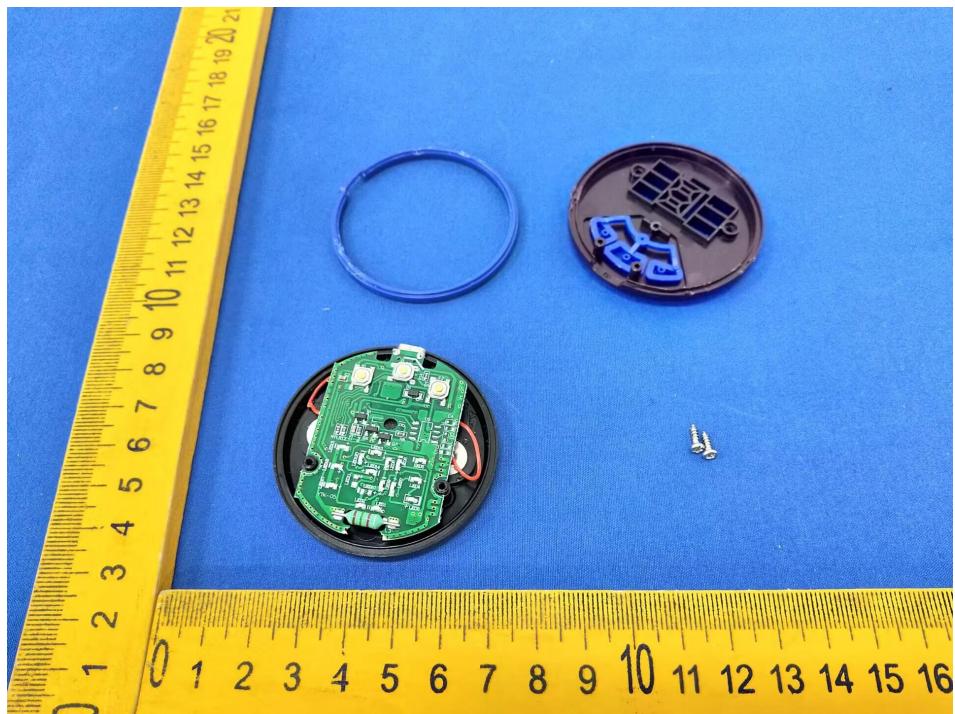


Photo 6 Appearance of PCB

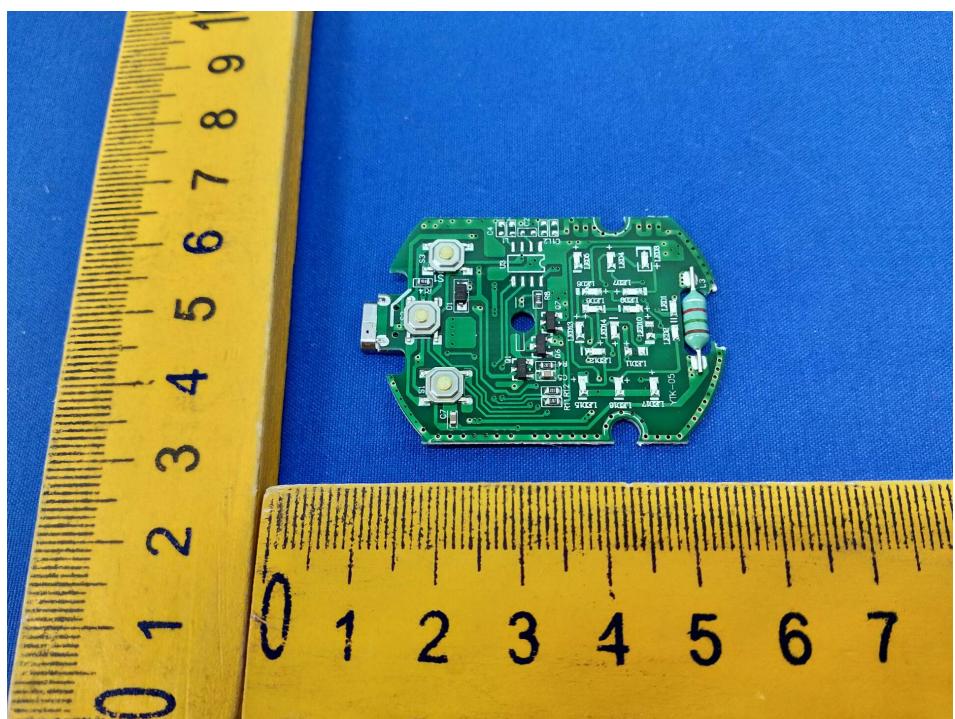


Photo 7 Appearance of PCB

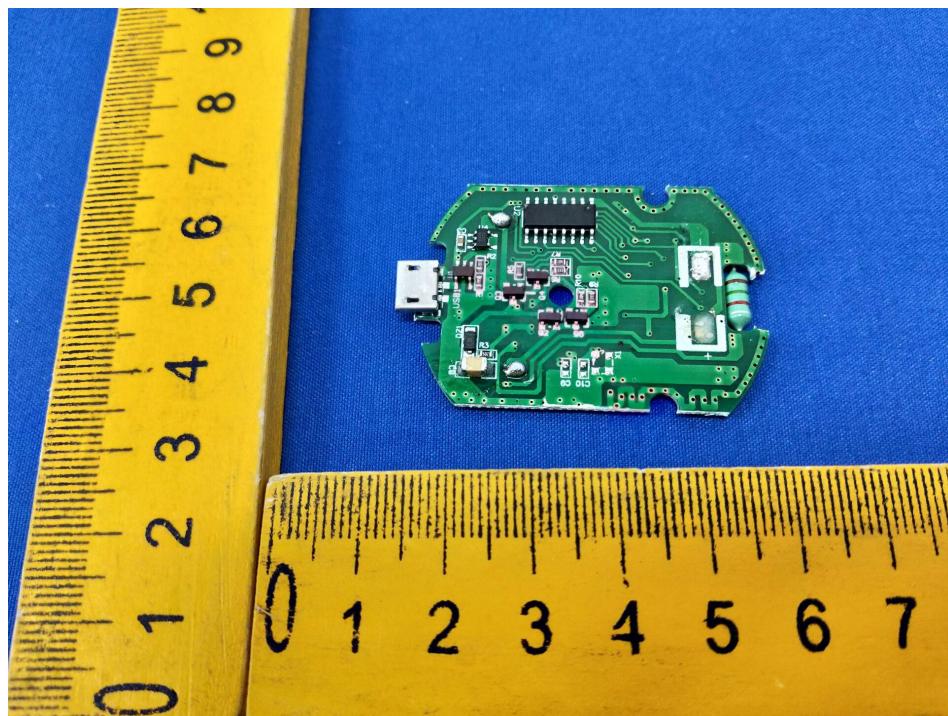


Photo 8 Appearance of Battery



END OF REPORT



CERTIFICATE OF CONFORMITY

No. : LC-240601030625

Applicant : Dongguan Weinimei Electronic Clothing Co., Ltd.

Address : 3rd Floor, No. 62 Hudong Road, Shatian Town, Dongguan City, Guangdong Province

Manufacturer : Shenzhen Outianxiang Technology Co., Ltd.
3rd Floor, Building 4, Hengmingzhu Science and Technology Industrial Park, Xinqiao Tongfu Industrial Zone, Gonghe Community, Shajing Street, Bao'an District, Shenzhen

Product : 3D massage foot pad

Models : VNM-1031, OTX-258, OTX-1101, VNM-523

Trademark : Beauty Body

Test Standard(s) : IEC 62321-1: 2013, IEC 62321-2: 2013, IEC 62321-3-1: 2013, IEC 62321-5: 2013, IEC 62321-4:2013+AMD1:2017, IEC 62321-6: 2015, IEC 62321-7-1:2015, IEC 62321-7-2: 2017, IEC 62321-8: 2017.

The EUT described above has been examined by us with the listed standards and found in compliance with the Council RoHS Directive 2011/65/EU & (EU)2015/863. It is possible to use RoHS marking to demonstrate the compliance with the RoHS Directive.

The test data obtained and the report issued by laboratories other than LC are provided by the applicant to us for data consolidation purpose. The report shall not be reproduced in part without written approval of us. It is only valid in connection with the test report number: LC-240601030625.

RoHS



Jun. 26, 2024

Shenzhen LC Testing Certification Co., Ltd.

510, Building B15, Yintian Industrial Zone, Yantian Community, Xixiang Street, Baoan District, Shenzhen

HOTLINE:0755-23008712

Email: 603422853@qq.com

Http://www.lice-lab.com